



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 3**

**Issue: IV**

**Month of publication: April 2015**

**DOI:**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Energy Renormalization on the Sierpinski Pentagon Using Electrical Transform

P.Uthayakumar<sup>1</sup>, K.Kathiresan<sup>2</sup>

<sup>1</sup>Department of Mathematics, PSNA College of Engineering & Technology, Dindigul-624622, Tamilnadu, India.

<sup>2</sup>Department of Physics, PSNA College of Engineering & Technology, Dindigul-624622, Tamilnadu, India

**Abstract** — In this paper the energy renormalization factor (resistance of the network) on the fractal Sierpinski Pentagon (Pentagasket) is described by the electrical network interpretation. First the Pentagasket- $D_5$  is obtained by the method of iterated function system. The Delta-wye transforms is iteratively applied on the Pentagasket- $D_5$  fractal to get the energy renormalization factor.

**Keywords**— Energy renormalization factor, and Pentagasket, Delta-wye transform, Resistance

## I. INTRODUCTION

The term "fractal" was first used by mathematician Benoit Mandelbrot in 1975. The formal mathematical definition of fractal is defined by Benoit Mandelbrot says that a fractal is a set for which the Hausdorff Besicovich dimension strictly exceeds the topological dimension. However, this is a very abstract definition. Generally, we can define a fractal as a rough or fragmented geometric shape that can be subdivided in parts, each of which is (at least approximately) a reduced-size copy of the whole. Fractals are generally self-similar and independent of scale. Many people are fascinated by the beautiful images termed fractals. Extending beyond the typical perception of mathematics as a body of complicated, boring formulas, fractal geometry mixes art with mathematics to demonstrate that equations are more than just a collection of numbers. What makes fractals even more interesting is that they are the best existing mathematical descriptions of many natural forms, such as coastlines, mountains or parts of living organisms. The Electrical network on fractals was first constructed by Robert S. Strichartz. The Harmonic extension on the Sierpinski gasket was analyzed by Zhigang Feng and Li Wang. In this we consider the Sierpinski Pentagon for the analysis of energy renormalization using the electrical network Delta-Wye transform. We construct networks with the property that every resistor in a network of a given order is a scalar multiple of the corresponding resistor in the next order network. The Sierpinski pentagon is one of the simplest examples of a nested fractal.

## II. ELECTICAL TRANSFORM - Δ-Y TRANSFORM

This transform is a mathematical technique to simplify the analysis of an electrical network. The name is derived from the shape of the circuit diagrams, which look respectively like the letter Y and the greek capital letter Δ. Three resistors are used in the three sides of the both Y and Δ circuits. The resistors show resistance against the current passing through them and it is denoted by the letter 'R'. The basic idea of the Δ-Y transform is, any triangular arrangement of resistors  $R_a, R_b$  and  $R_c$  within a larger circuit can be replaced by a star, with resistances  $R_1, R_2$  and  $R_3$ , such that all the resistances between any two points among the three vertices in the triangle and the star are the same.

The following system equations are used to transform Δ-load to Y-load circuit.

$$\begin{aligned} R_1 &= \frac{R_b R_c}{R_a + R_b + R_c} \\ R_2 &= \frac{R_a R_c}{R_a + R_b + R_c} \\ R_3 &= \frac{R_a R_b}{R_a + R_b + R_c} \end{aligned} \quad \text{----- (1.1)}$$

The general idea to compute is,

$$R_{\Delta} = \frac{R_p}{R_{\text{opposite}}} \quad \text{Where } R_p = R_1 R_2 + R_2 R_3 + R_3 R_1$$

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$R_p$  is the sum of the products of all pairs of resistances in the Y circuit and  $R_{\text{opposite}}$  is the resistance of the vertex in the Y circuit which is opposite the edge with  $R_{\Delta}$ .

The formulas to transform Y-load to  $\Delta$ -load circuit is obtained by,

$$\begin{aligned} R_a &= \frac{R_1 R_2 + R_2 R_3 + R_3 R_1}{R_1} \\ R_b &= \frac{R_1 R_2 + R_2 R_3 + R_3 R_1}{R_2} \\ R_c &= \frac{R_1 R_2 + R_2 R_3 + R_3 R_1}{R_3} \end{aligned} \quad \text{-----(1.2)}$$

### III. THE PENTAGON SIERPINSKI FRACTAL

The Sierpinski's fractal is named after the Polish mathematician Waclaw Sierpinski who described some of its interesting properties in 1916. It is one of the simplest fractal shapes in existence. The construction of the pentagasket ( $P_0$ ) fractal is similar to the construction of the Sierpinski gasket by scaling a triangle and translating three copies. We scale a pentagon and translate five similar copies of itself. We place the five smaller pentagons inside the larger pentagon. The Sierpinski pentagon can be

obtained as an iterated function system construction. The IFS consisting of a scaling factor by  $r = \frac{3-\sqrt{5}}{2} = 0.382$  and an appropriate translation for each of the five functions. The Sierpinski pentagon is the limiting set for this construction. paragraphs must be indented. All paragraphs must be justified, i.e. both left-justified and right-justified.

$$\begin{aligned} F_1 \begin{pmatrix} x \\ y \end{pmatrix} &= 0.382 \begin{pmatrix} x \\ y \end{pmatrix}, \quad F_2 \begin{pmatrix} x \\ y \end{pmatrix} = 0.382 \begin{pmatrix} x \\ y \end{pmatrix} + \begin{pmatrix} 0.618 \\ 0 \end{pmatrix}, \quad F_3 \begin{pmatrix} x \\ y \end{pmatrix} = 0.382 \begin{pmatrix} x \\ y \end{pmatrix} + \begin{pmatrix} 0.809 \\ 0.588 \end{pmatrix}, \\ F_4 \begin{pmatrix} x \\ y \end{pmatrix} &= 0.382 \begin{pmatrix} x \\ y \end{pmatrix} + \begin{pmatrix} 0.309 \\ 0.951 \end{pmatrix}, \quad F_5 \begin{pmatrix} x \\ y \end{pmatrix} = 0.38 \begin{pmatrix} x \\ y \end{pmatrix} + \begin{pmatrix} -0.191 \\ 0.588 \end{pmatrix} \end{aligned} \quad \text{-----(2.1)}$$

The Sierpinski pentagon is self similar with five non overlapping copies of itself, each scaled by the factor  $r < 1$ , hence the similarity dimension is


$$d = \frac{\log(1/n)}{\log(1/r)} = \frac{\log(1/5)}{\log(2/(3-\sqrt{5}))} = 1.6723.$$

We denote Sierpinski pentagon by  $P$ , the  $P = \bigcup_{i=1}^5 F_i(P)$ , where  $P$  is the self similar set with respect to  $\{F_1, F_2, F_3, F_4, F_5\}$ . The

Pentagasket and  $V_1$  of the pentagasket are shown in the following diagrams.



Sierpinski pentagasket



Pentagon- $V_1$

#### A. Graph Energy And Energy Renormalization


The initial energy of the pentagasket is given of the form

$$E_0(u) = a((x_0-x_1)^2 + (x_0-x_2)^2) + b(x_1-x_2)^2 \quad \text{-----(2.2)}$$

©IJRASET 2015: All Rights are Reserved

## International Journal for Research in Applied Science & Engineering Technology (IJRASET)

transform in 2(c) we get the diagram-2(d). And by adding resistances in series in the diagram-2(d) gives the diagram 2(e).

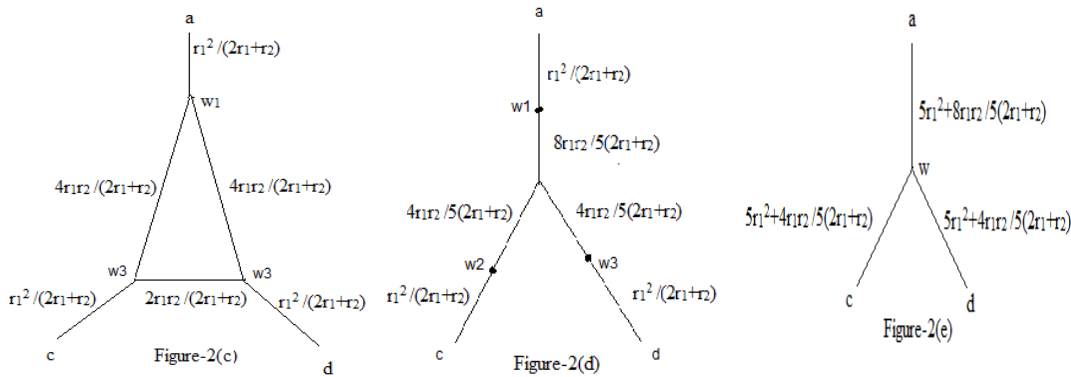

The renormalization equation describes exactly that the Figure 2(e) must be a multiple of the network in the figure 2(a)(ii), which yields the renormalization factor. Which yields the equation

$$\frac{(5r_1^2 + 4r_1r_2) / (5(2r_1 + r_2))}{(5r_1^2 + 8r_1r_2) / (5(2r_1 + r_2))} = \frac{r_1r_2 / (2r_1 + r_2)}{r_1^2 / (2r_1 + r_2)}$$

$$i.e., \quad \frac{(5r_1^2 + 4r_1r_2)}{(5r_1^2 + 8r_1r_2)} = \frac{r_1r_2}{r_1^2}$$

$$i.e., \quad (5r_1^2 + 4r_1r_2)r_1 = (5r_1^2 + 8r_1r_2)r_2$$

Simplifying we get, the equation  $8r_2^2 + r_2r_1 - 5r_1^2 = 0$ , By considering the  $r_1$  value as 1 unit we get the equation in terms of  $r_2$  only and solving for  $r_2$  gives the solution,  $r_2 = 0.7305$ .

Thus the value of  $b$  is defined by the formula,  $b = \frac{1}{r_2} = \frac{1}{0.7305} = 1.3689$ . This coincides with the value of  $b$  in the equation (2.2).

The renormalization factor is obtained by the formula using the value of  $r_2$  is given by,  $c_i = \frac{5}{8r_2 + 5} = \frac{5}{8(0.7305) + 5} \approx 0.4611$ .

### IV. CONCLUSIONS

The Electrical transform is a mathematical technique to simplify the analysis of an electrical network. This electrical network interpretation using the Delta-Wye transform can be applied for the renormalization on the other Sierpinski fractals.

### REFERENCES

- [1] Robert S. Strichartz, Differential Equations on fractals, Princeton University Press, 2006.
- [2] Zhigang Feng and Li Wang, Harmonic extension on the level-3 Sierpinski gasket, International Journal of Nonlinear Science, Vol-10 pp.308-312, (2010).
- [3] Uthayakumar.R and Nalainidevi.R, The Harmonic extension on the Level-3 Sierpinski gasket via the electrical network, Proceedings of the international Conference on Information Communication and Embedded Systems, 998-1004, 2013.
- [4] B. Adams, S.A. Smith, R. Strichartz and A. Teplyaev, The spectrum of the Laplacian on the pentagasket. Fractals in Graz 2001, Trends Math., Birkhäuser (2003).
- [5] B.Boyle, K.Cekala, D.ferrone, N.Rifkin and A. Teplyaev, "Electrical Resistance of N-gasket Fractal Network" Pacific Journal of Mathematics, Vol.-233, No.1(2007), pp.15-40.
- [6] J.Kigami, "Harmonic calculus on P.C.F. self similar sets", The trans. of The American Mathematical Society, Vol-335, No.2. (1993).
- [7] J.Kigami, "Effective resistance for harmonic structures on p.c.f. self similar sets", Math. Proc. Camb. Phil. Soc, 115, pp.291-303, 1994.
- [8] J.Kigami, Robert S. Strichartz and Katharine C. Walker, "Constructing a Laplacian on the Diamond Fractal", Experimental Mathematics, Vol-10, No.3, 2001.





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)