iJRASET
International Journal For Research in Applied Science and Engineering Technology

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 8 **Issue:** XII **Month of publication:** December 2020

DOI: https://doi.org/10.22214/ijraset.2020.32662

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 8 Issue XII Dec 2020- Available at www.ijraset.com

Gantmacher's Formula

Ram Swaroop Meghwal[1], DeepMala Meena[2]
[1, 2]*Dept. of Physics, Govt. College, Kota (Raj.)-INDIA.*

Abstract: ***In theory of differential equations we learn to solve (dy/dx)+Py=Q. But Its vector analogue as encountered in case of Lorentz force is extremely tedious and firstly, it was done by Gantmakher. Here a simplified version is presented for scholarly attention.***

Keywords: Gantmacher, vector differential equation, Lorentz force problem.

I. INTRODUCTION

General principles of dynamics are either formulated in differential or in integral forms [1]. The differential or integral forms are many times of implicit nature in such a way that solution appears in terms of solution itself [2]. When such form acquire the vector attribute complexity aggravates [3]. Lorentz force [4] is one of such complexities.

II. STATEMENT OF THE PROBLEM AND ITS SOLUTION

$$m\frac{d^2\vec{r}}{dt^2}=e\left[\vec{E}+\frac{d\vec{r}}{dt}\times\vec{B}\right]\Leftrightarrow\frac{d\vec{v}}{dt}=\frac{e\vec{E}}{m}+\vec{v}\times\frac{e\vec{B}}{m}\equiv\vec{g}+\vec{v}\times\vec{\omega}$$

The cross product can be made to produce two components only if one of the vectors is single component vector. Now velocity vector is not a constant vector, hence we may choose ω to be a single component vector [5]. Moreover, we must allow v to have all three components. There will be no loss of generality if g is confined to x-z plane.

$$\vec{\omega}=\omega\hat{z}=(0,0,\omega)_{\text{rectangular}}=(\omega,0,0)_{spherical}$$

$$\vec{g}=g_x\hat{x}+g_z\hat{z}=(g_x,0,g_z)_{\text{rectangular}}=(g,\psi,0)_{spherical}$$

$$\vec{v}=v_x\hat{x}+v_y\hat{y}+v_z\hat{z}=(v_x,v_y,v_z)_{\text{rectangular}}=(v,\theta,\phi)_{spherical}$$

$$\vec{v}\times\vec{\omega}=\begin{vmatrix}\hat{x}&\hat{y}&\hat{z}\\v_x&v_y&v_z\\0&0&\omega\end{vmatrix}=\omega v_y\hat{x}-\omega v_x\hat{y}\Rightarrow\hat{\omega}\times\vec{v}_0=-v_{0y}\hat{x}+v_{0x}\hat{y}$$

$$-\hat{\omega}\times\left(\hat{\omega}\times\vec{v}_0\right)=v_{0x}\hat{x}+v_{0y}\hat{y},\ \hat{\omega}\times\vec{g}=g_x\hat{y},\ \ -\hat{\omega}\times\left(\hat{\omega}\times\vec{g}\right)=g_x\hat{x}$$

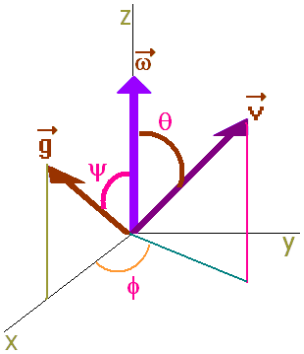

©IJRASET: All Rights are Reserved

$$\frac{d\vec{v}}{dt} = \vec{g} + \vec{v} \times \vec{\omega} \Rightarrow \frac{dv_x}{dt} = g_x + \omega v_y \qquad \ldots(1)$$

$$\frac{dv_y}{dt} = -\omega v_x \qquad \ldots(2)$$

$$\frac{dv_z}{dt} = g_z \qquad \ldots(3)$$

Differentiating Eq. (1) and using Eq. (2) , we obtain

$$\frac{d^2v_x}{dt^2} = \frac{dg_x}{dt} + \omega\frac{dv_y}{dt} = 0 + \omega(-\omega v_x) \Rightarrow \frac{d^2v_x}{dt^2} + \omega^2 v_x = 0$$

$$\therefore v_x = A\cos\omega t + B\sin\omega t, \quad v_{0x} = A\cos 0^o + B\sin 0^o = A$$

$$v_x = v_{0x}\cos\omega t + B\sin\omega t$$

$$\frac{dv_x}{dt} = g_x + \omega v_y \Rightarrow v_y = -\frac{g_x}{\omega} + \frac{1}{\omega}\frac{d}{dt}\left\{v_{0x}\cos\omega t + B\sin\omega t\right\}$$

$$\therefore v_y = -\frac{g_x}{\omega} - v_{0x}\sin\omega t + B\cos\omega t, \quad v_{0y} = -\frac{g_x}{\omega} + B$$

$$\boxed{v_x = v_{0x}\cos\omega t + v_{0y}\sin\omega t + \frac{g_x}{\omega}\sin\omega t} \qquad ---(4)$$

$$v_y = -\frac{g_x}{\omega} - v_{0x}\sin\omega t + \left(v_{0y} + \frac{g_x}{\omega}\right)\cos\omega t$$

$$\boxed{v_y = -v_{0x}\sin\omega t + v_{0y}\cos\omega t + \frac{g_x}{\omega}\left(\cos\omega t - 1\right)} \qquad ---(5)$$

$$\boxed{v_z = v_{0z} + g_z t} \qquad ---(6)$$

©IJRASET: All Rights are Reserved

Further results will be obtained after integrating Eqs. (4)-(6)

$$\frac{dx}{dt} = v_{0x}\cos\omega t + v_{0y}\sin\omega t + \frac{g_x}{\omega}\sin\omega t$$

$$\Rightarrow x = v_{0x}.\frac{\sin\omega t}{\omega} + v_{0y}.\frac{-\cos\omega t}{\omega} + \frac{g_x}{\omega}.\frac{-\cos\omega t}{\omega} + c$$

$$\Rightarrow x_0 = v_{0y}.\frac{-1}{\omega} + \frac{g_x}{\omega}.\frac{-1}{\omega} + c \Rightarrow c = x_0 + \frac{v_{0y}}{\omega} + \frac{g_x}{\omega^2},$$

$$\therefore x = x_0 + v_{0x}.\frac{\sin\omega t}{\omega} + v_{0y}.\frac{1-\cos\omega t}{\omega} + \frac{g_x}{\omega}.\frac{1-\cos\omega t}{\omega}$$

$$\Rightarrow x = x_0 + v_{0x}.\frac{\sin\omega t - \omega t + \omega t}{\omega} + v_{0y}.\frac{1-\cos\omega t}{\omega} + \frac{g_x}{\omega}.\frac{1-\cos\omega t - \frac{1}{2}(\omega t)^2 + \frac{1}{2}(\omega t)^2}{\omega}$$

$$\Rightarrow \boxed{x = x_0 + v_{0x}t + \frac{1}{2}g_x t^2 + v_{0x}\left(\frac{\sin\omega t - \omega t}{\omega}\right) - v_{0y}\left(\frac{\cos\omega t - 1}{\omega}\right) - g_x\left(\frac{\cos\omega t - 1 + \frac{1}{2}(\omega t)^2}{\omega^2}\right)}$$

$$\frac{dy}{dt} = -v_{0x}\sin\omega t + v_{0y}\cos\omega t + \frac{g_x}{\omega}(\cos\omega t - 1)$$

$$\Rightarrow y = v_{0x}\frac{\cos\omega t}{\omega} + v_{0y}\frac{\sin\omega t}{\omega} + \frac{g_x}{\omega}\left(\frac{\sin\omega t}{\omega} - t\right) + D$$

$$\Rightarrow y_0 = \frac{v_{0x}}{\omega} + D \Rightarrow D = y_0 - \frac{v_{0x}}{\omega},$$

$$\therefore y = y_0 + v_{0x}\frac{\cos\omega t - 1}{\omega} + v_{0y}\frac{\sin\omega t - \omega t + \omega t}{\omega} + g_x\left(\frac{\sin\omega t - \omega t}{\omega^2}\right)$$

$$\Rightarrow y = y_0 + v_{0y}t + v_{0x}\frac{\cos\omega t - 1}{\omega} + v_{0y}\frac{\sin\omega t - \omega t}{\omega} + g_x\left(\frac{\sin\omega t - \omega t}{\omega^2}\right)$$

$$\Rightarrow \boxed{y = y_0 + v_{0y}t + v_{0x}\left(\frac{\cos\omega t - 1}{\omega}\right) + \left\{v_{0y} + \frac{g_x}{\omega}\right\}\left(\frac{\sin\omega t - \omega t}{\omega}\right)}$$

$$\frac{dz}{dt} = v_{0z} + g_z t \Rightarrow \boxed{z = z_0 + v_{0z}t + g_z\frac{t^2}{2}}$$

©IJRASET: All Rights are Reserved

$$\vec{r} = x_0\hat{x} + v_{0x}\hat{x}t + \frac{1}{2}g_x\hat{x}t^2 + v_{0x}\hat{x}\left(\frac{\sin\omega t - \omega t}{\omega}\right) - v_{0y}\hat{x}\left(\frac{\cos\omega t - 1}{\omega}\right)$$

$$-g_x\hat{x}\left(\frac{\cos\omega t - 1 + \frac{1}{2}(\omega t)^2}{\omega^2}\right) + y_0\hat{y} + v_{0y}\hat{y}t + v_{0x}\hat{y}\left(\frac{\cos\omega t - 1}{\omega}\right)$$

$$+\left\{v_{0y}\hat{y} + \frac{g_x}{\omega}\hat{y}\right\}\left(\frac{\sin\omega t - \omega t}{\omega}\right) + z_0\hat{z} + v_{0z}\hat{z}t + g_z\hat{z}\frac{t^2}{2}$$

$$= \vec{r}_0 + \vec{v}_0 t + \frac{1}{2}\vec{g}t^2 + \left(\frac{\cos\omega t - 1}{\omega}\right)\left\{-v_{0y}\hat{x} + v_{0x}\hat{y}\right\}$$

$$+\left(\frac{\cos\omega t - 1 + \frac{1}{2}(\omega t)^2}{\omega^2}\right)\left\{-g_x\hat{x}\right\} + \left(\frac{\sin\omega t - \omega t}{\omega}\right)\left\{v_{0x}\hat{x} + v_{0y}\hat{y} + \frac{g_x}{\omega}\hat{y}\right\}$$

$$= \vec{r}_0 + \vec{v}_0 t + \frac{1}{2}\vec{g}t^2 + \left(\frac{\cos\omega t - 1}{\omega}\right)\left\{\hat{\omega}\times\vec{v}_0\right\}$$

$$+\left(\frac{\cos\omega t - 1 + \frac{1}{2}(\omega t)^2}{\omega^2}\right)\left\{\hat{\omega}\times\left(\hat{\omega}\times\vec{g}\right)\right\}$$

$$+\left(\frac{\sin\omega t - \omega t}{\omega}\right)\left\{-\hat{\omega}\times\left(\hat{\omega}\times\vec{v}_0\right) + \frac{\hat{\omega}\times\vec{g}}{\omega}\right\}$$

$$= \vec{r}_0 + \vec{v}_0 t + \frac{1}{2}\vec{g}t^2 + \left(\frac{\cos\omega t - 1}{\omega^2}\right)\left\{\vec{\omega}\times\vec{v}_0\right\}$$

$$+\left(\frac{\cos\omega t - 1 + \frac{1}{2}(\omega t)^2}{\omega^4}\right)\left\{\vec{\omega}\times\left(\vec{\omega}\times\vec{g}\right)\right\}$$

$$+\left(\frac{\sin\omega t - \omega t}{\omega^3}\right)\left\{\vec{\omega}\times\vec{g} - \vec{\omega}\times\left(\vec{\omega}\times\vec{v}_0\right)\right\}$$

$$\frac{d\vec{v}}{dt} = \vec{g} - \vec{\omega}\times\frac{d\vec{r}}{dt} \Rightarrow \vec{v} = \vec{g}t - \vec{\omega}\times\vec{r} + \vec{c} \Rightarrow \vec{v}_0 = -\vec{\omega}\times\vec{r}_0 + \vec{c}$$

$$\Rightarrow \boxed{\vec{v} = \vec{v}_0 + \vec{g}t - \vec{\omega}\times\left(\vec{r} - \vec{r}_0\right)}$$

©IJRASET: All Rights are Reserved

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 8 Issue XII Dec 2020- Available at www.ijraset.com

III. DISCUSSION

The problem involving vector nature of differential equation is dealt by reducing it to a planar structure. Then solution is obtained in somewhat easier way. Again combining the solutions of two components of planar domain, we get the general solution. This is the simplest way of getting Gantmacher's formula.

REFERENCES

[1] F R Gantmacher, Lectures of analytical mechanics, Mir 1975
[2] Griffiths, David J. Introduction to electrodynamics ,: Prentice-Hall. 1999.
[3] Huray, Paul G. . *Maxwell's Equations*. Wiley-IEEE.2010
[4] J.H.Field, Am. J. Phys. 69 569 , 2001.
[5] H.Goldstein, 'Classical Mechanics', Addison-Wesley, Reading Massachusetts, 1959

©IJRASET: All Rights are Reserved

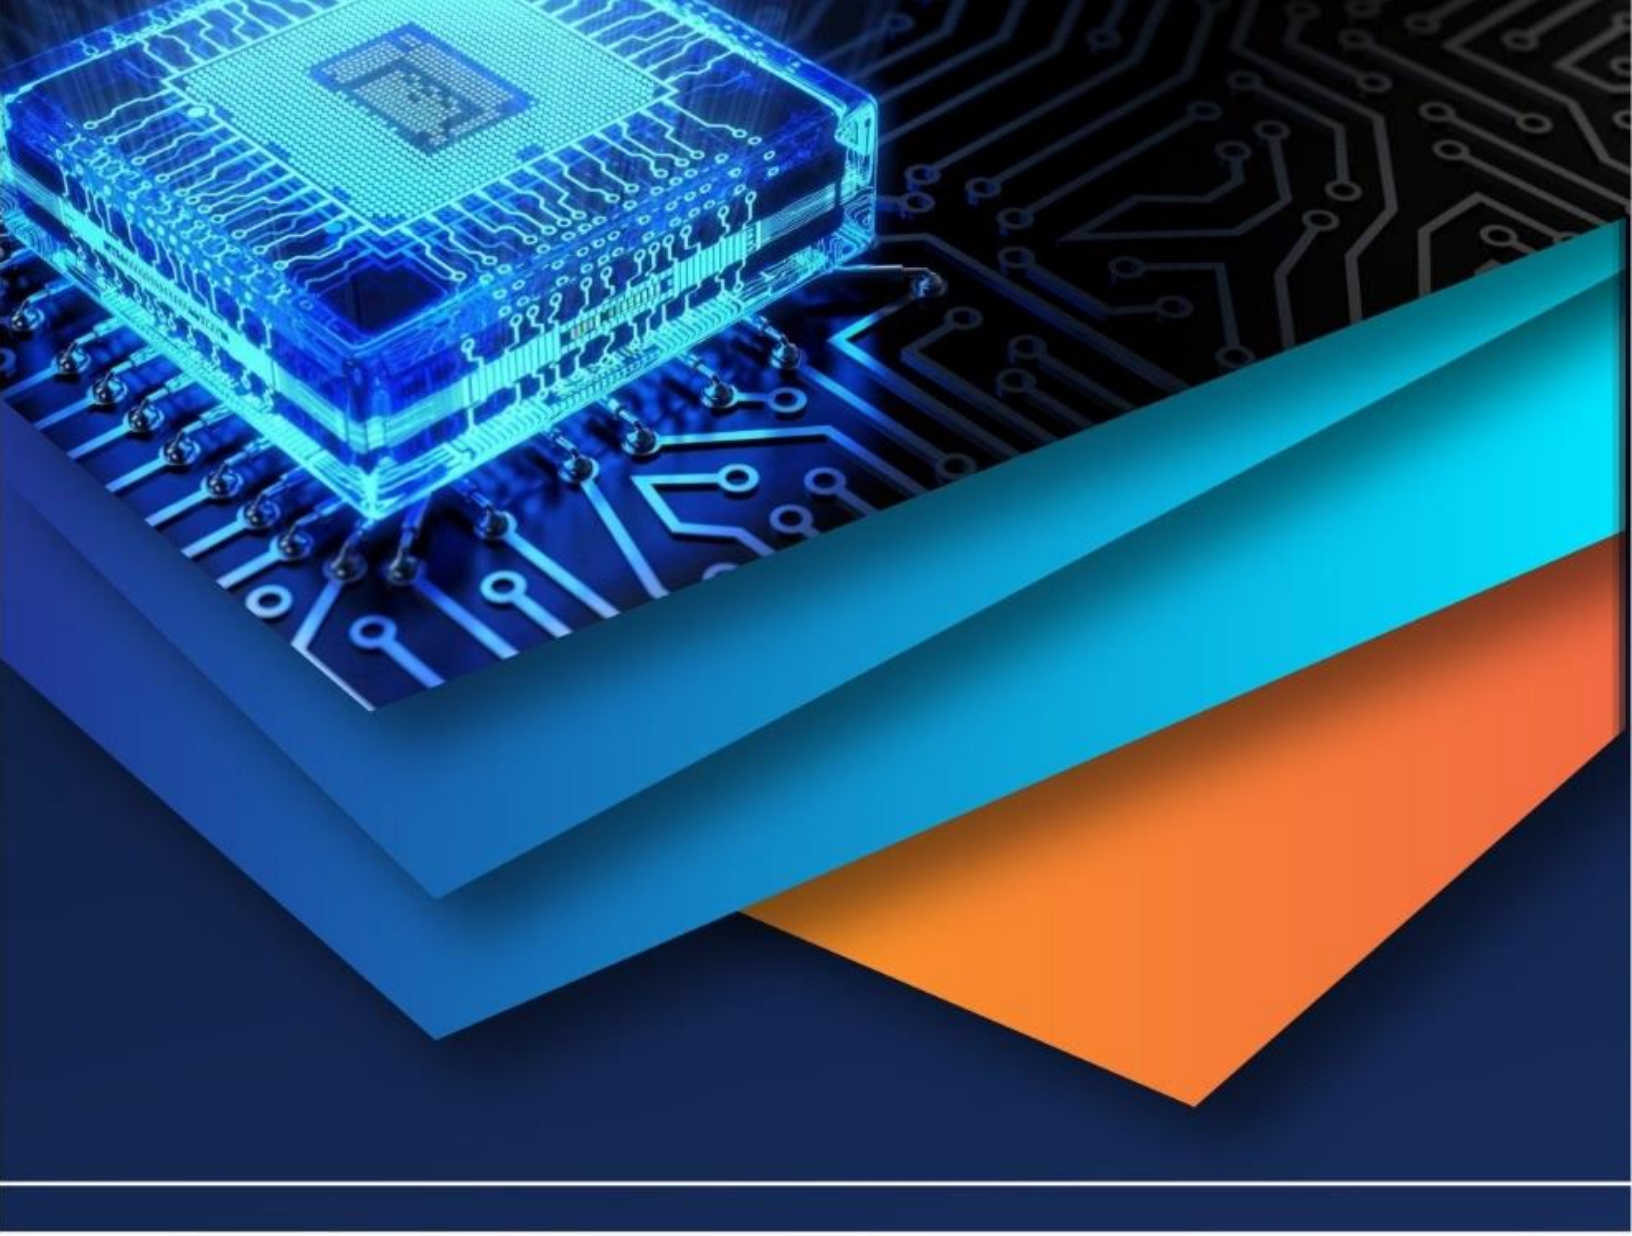

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)