iJRASET
International Journal For Research in Applied Science and Engineering Technology



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

**Volume:** 10 **Issue:** VII **Month of publication:** July 2022

**DOI:** https://doi.org/10.22214/ijraset.2022.45769

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
*ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538*
*Volume 10 Issue VII July 2022- Available at www.ijraset.com*

# Database Security with Fingerprint Masking

Deepa RM[1], Deepika S[2], Sriram Lakumarapu[3]
*[1]LG Soft India Pvt Ltd, [2]TCS, [3]Vasavi College of Engineerings*

***Abstract:*** ***Information in numerous areas including medication, business, and science was so crucial, in which directories are utilized efficiently for information sharing.Nevertheless, the directories confront the danger to be pirated, taken or even misused, which might lead to many of protection risks regarding ownership rights, information tampering as well as secrecy safeguards. Watermarking is the technology which is used to secure the database from the various attacks.It is also used to hide the content from the un authorized users. The majority of state-of-the- art techniques alter the initial information to a big level, lead to information quality wreckage,and then can't attain balance that is good between robustness from malicious strikes as well as information restoration. we suggest a reversible and robust watermarking method with Genetic Algorithm and Histogram Shifting Watermarking (GAHSW) to relation the numerical data. This algorithm used to get the unique key for the database as well as the watermarked place. Experimental evaluation show the usefulness and methods within the terminology of robustness from malicious strikes as well as upkeep of information quality.We have achieved the security level on comparing with existing system.***

***Keywords: Information Security,Watermark, Reversible, Right***

## I. INTRODUCTION

Presently, relational directories are utilizedas well as discussed thoroughly as a result of the growing usage on the Internet and also cloud computing. Nevertheless, the amazing rise in the development, sharing and transfer of directories at the same time incurs protection consequences, like information theft, unlawful copying as well as copyright violation. Thus information protection difficulties are becoming more and more visible. In fact, outsourced information may be redistributed or even customized with no authorization at proprietors. Mishaps of database leakage were found often within the past few years, even during domains including health care whereby information are delicate. Historically, watermarking methods are already used to make sure ownership safeguards as well as tamper proofing for different details platforms

## II. RELATED WORK

Database watermarking was first of all released in 2002 [1]. Since then, several techniques are recommended. When it comes to, a delicate as well as strong chronic watermarking technique which embeds both public and private watermarks is suggested [2]. Depending on if the watermarking presents some alterations towards the information on the database, the watermark engineering could be classified into 2 parts: Primarily bring in robustand distortion-based watermarking strategies. The majority of the distortion based watermarking systems have been suggested to deal with distortion restrictions. For example, [3] [4] within the embedding procedure doesn't alter numerical characteristics when the accessibility problems for particular details aren't satisfied [5], focus on protecting the database stats, as well as requires into bank account the total database semantics that will additionally be preserved. [6] [7] However, these techniques change the information to a big level, which might lead to the loss in information quality. In order to conquer the issues of these distortion based techniques, reversible database watermarking continues to be brought to recoup the initial information completely soon after removing lodged watermarks through the watermarked directories [8]. Relational directories are utilized as well as discussed thoroughly as a result of the growing usage on the Internet and also cloud computing. Nevertheless, the amazing rise in the development, sharing and transfer of directories at the same time incurs protection consequences, likeinformation theft, unlawful copying as well as copyright violation [9]. Thus information protection difficulties are becoming more and more visible. In fact, outsourced information may be redistributed or even modified with no authorization at proprietors. Mishaps of database leakage were found often within the past few years, even during domains including health care whereby information are sensitive [10].

## III. PROPOSED WORK

Database entry is going to be supplied when the person provides a proper password and username. The risk that is high of database information usually tampers and tough stolen. In case another pc user wish to examine and / or alterinformation within the database after that without disclose watermarking the person wasn't in a position to have information that is correct, to obtain the actual information the old have to supply the reverse watermarking next just he is able to in a position to see the appropriate information.

©IJRASET: All Rights are Reserved 

*A. Feature Analysis and Selection*

This particular component consists of the information partitioning.. It is encoded by the watermark techniques that continues to be carried out by manager of the Admin. This algorithm partitions the information established directly to rational organizations through making use of information partitioning algorithm.

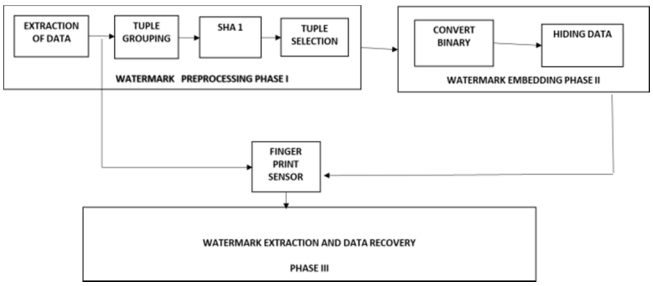



Fig . 2 Architecture DiagramWatermarking by Tuples Selection

It is a single shoot and even one specific row within a Relational Database. With this particular phase to select the specific tuples for embedding Watermarked Content. Computation isa means computed for each characteristic. If the valuation of any kind of feature type of a tuple is above the respective computed threshold of its, it isselected for Encoding Process. The info optionthreshold for an attribute is believed.

*B. Watermark Encoding*

Watermark bits are lodged during the first information established by making use of watermark embedding algorithm. The suggested algorithm embeds every bit a multibit watermark made of day period for each and every selected row. The watermark bits are lodged in the selectedtuples by installing a good watermarking goal. Ourtechnique embeds each share on the watermark at every single selected tuple of each and every partition.

*C. Watermark Decoding and Edge detectionAuthentication*

Authentication is recommended as being an alternative therapy for textual material reliant. It is mainly depends on customer fingerprint rather than alphanumerical. The main argument here is that pass-user's finger print documents electronic documents immediately after what he/she is gon nabe authenticated users are far of higher qualityduring understanding. The finger print documents written documents has to be saved with Server Forthat Specific User. All through Login phase Adminmust find out the point with the fingerprint of his. Basically authentication is simple; a real computerperson needs to correctly provide the fingerprint ofhis after that he/she is gonna be authenticated.

Watermark Extraction process in the Decoding point. The Watermarked Content has to be extracted exclusively by legitimate computer pcuser to create the correct ownership. If the User ownership created written content is matched up inplace by content material was produced through theAdmin, Decoding treatment has to achieve. Otherwise it is not achieved.

*D. Proposed Algorithm*

*1)* Step 1: The user need to register with their detailsand finger print.
*2)* Step 2: Extract the required data from thedatabase.
*3)* Step 3: The data selected will be viewed.
*4)* Step 4: The tuple will be grouped using theprimary key.
*5)* Step 5: Divide the dataset into four partitions.
*6)* Step 6: Using sha-1 algorithm the hashing will bedone on the dataset.
*7)* Step 7: Selection and rejection of tuples usingprimary key.
*8)* Step 8: Convert the seleccted data into binary.
*9)* Step 9: Hide the data using watermark embeddingso the data will be hidden securely.
*10)* Step 10:To recover the data user need to login using the registered information. Authentication will be done using finger print.
*11)* Step 11:The original data will be shown to the authorized user.

## IV. RESULT AND DISCUSSIONS

The experiments are performed using the TOMCAT 7.0 and MYSQL 5.0 version. The computations are performed using Toolbox that is readily available in TOMCAT. Connecting local server to improve the testing of each connection and redirect the pages and links.

### *A. Registration through Fingerprints*

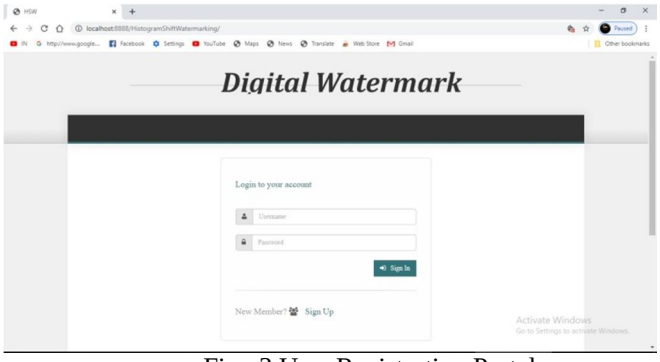



Fig . 3 User Registration Portal

User needs to sign up with their fingerprint and personal details . The system register the user account provided by the user . After sign up you need to login with the user detailed as provided before.

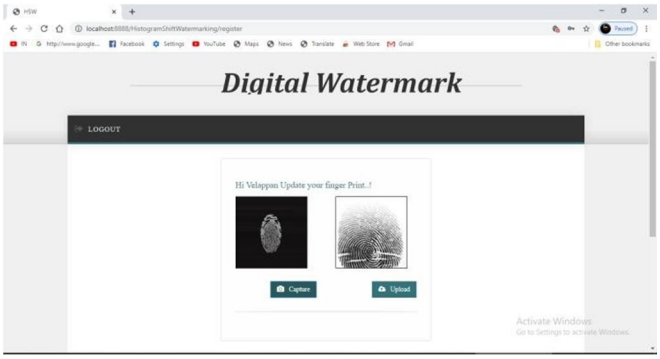



Fig . 4 Register the fingerprint of user

Register the fingerprint . It also register with the user details . Biometric scanner used in this Digital Watermarking for the Security purposes.

### *B. Structure of the Data Set*

Fig . 5 Generate Report




Extract the data set from the databases . Theextracted data will be Reported as a summary.

To view the data sets of a certain organization orother commercial industries.

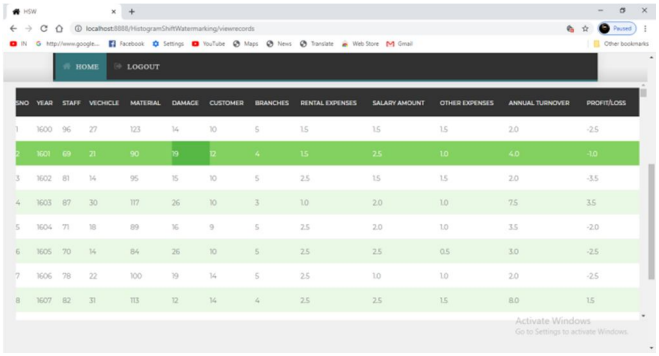



Fig . 6 Database from the data sets

The primary keys were used to divided thedata into four partitioning data sets . Each group will be partitioned as tuples using primary keys . Tuples Grouping will be done on the above data setprovided .

*C. Encrypted Data Set*

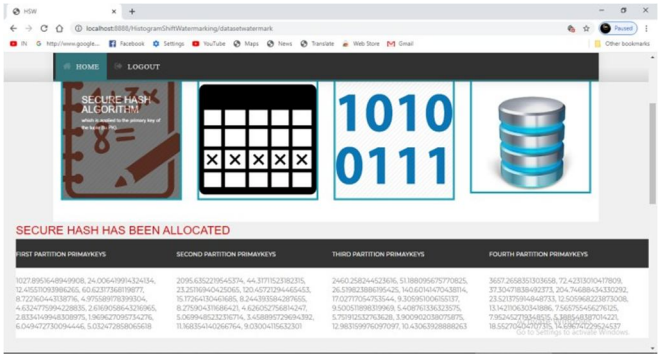



Fig . 7 Secure Hash Algorithm

The Tuples which are grouped in the above step will be Hashed using SHA-1 Algorithm for Security purposes . The tuple selection andrejection of data will be done so that the unauthorized user will not able to access it.

*D. Binary Format Data Set*

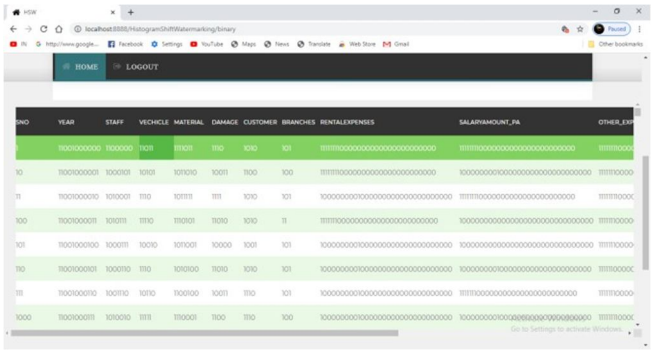



Fig . 8 Covert Binary

The Selected tuples will be converted to binary and the data will be distorted again thewhole data set will be distorted for added security.

*E. Hiding the data set using Watermarking*

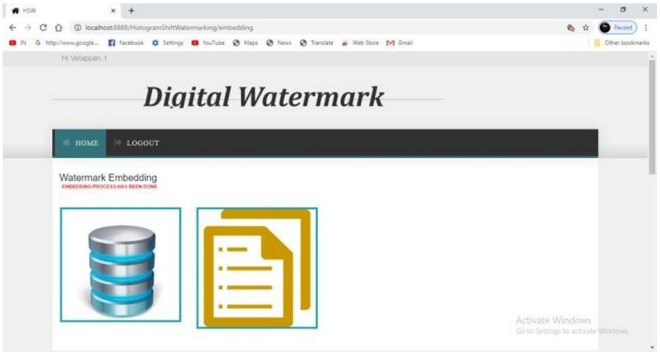



Fig . 9 Watermarking embedding

Hiding the data set watermark technique byembedding fake data again it was crosschecked whether the data was hide and fake data was watermarked.

*F. Database Retrieval Through Fingerprint*

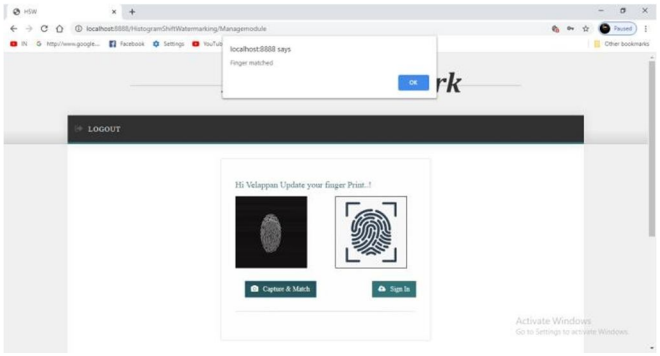



Fig . 10 Fingerprint Authentication

Retrieving the data using fingerprint provided during the sign up phase . Once the fingerprint matches hidden data will be revealed for security purposes.

*G. Extracted Original Data*

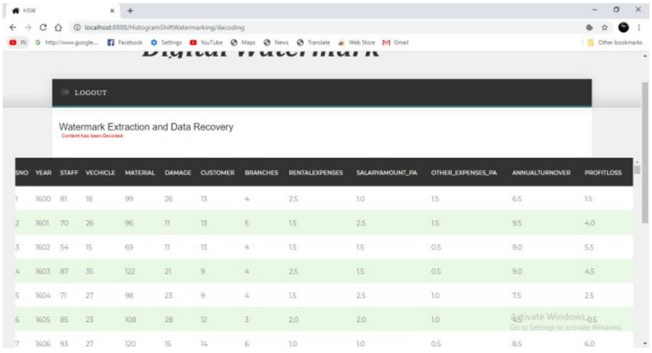



Fig . 11 Data Recovery

The original data which is recovered from the hidden data will be showed to the authorized person so that the security will be maintained.

## V. CONCLUSION

Watermarking has turned into a great exploration because the growing need of ownership safeguards when discussing repository information. Transformations inside the database that significantly compromise the information quality are made by conventional watermarking methods. Reversible watermarking methods are accustomed to to fix the dilemma since they are able to recoup authentic details through thewatermarked database as well as make sure information quality. Although the strategies aren't strong sufficiently from malicious episodes, a lot ofreversible watermarking methods arerecommended.

## REFERENCES

[1] Chai, H., Yang, S., Jiang, Z. L., Wang, X., Chen, Y., & Luo, H. (2019, December). A New Robust and Reversible Watermarking Technique Based on Erasure Code. In InternationalConference on Algorithms and Architectures for Parallel Processing (pp. 153-168). Springer,Cham.

[2] Li, Y., Wang, J., Ge, S., Luo, X., & Wang, B. (2019). A reversible database watermarking method with low distortion. Mathematical biosciences and engineering: MBE, 16(5), 4053- 4068.

[3] Zhao, M., Jiang, C., & Duan, J. (2019, October). Reversible Database Watermarking Based on Differential Evolution Algorithm. In 2019 International Conference on Artificial Intelligence and Advanced Manufacturing (AIAM) (pp. 120-124). IEEE.

[4] Kamble, P., Raut, N., Raut, A., & Naik, S. (2019, April). An Innovative Approach for Data Recovery Using Robust Reversible Watermarking. In 2019 3rd International Conference on Trends inElectronics and Informatics (ICOEI) (pp. 1401-1404). IEEE.

[5] Agarwal, N., Singh, A. K., & Singh, P. K. (2019). Survey of robust and imperceptible watermarking. Multimedia Tools andApplications, 78(7), 8603-8633.

[6] Sabbane, F., Aherrahrou, N., & Tairi, H. (2019,March). A new region based watermarking schemefor medical images. In Proceedings of the New Challenges in Data Sciences: Acts of the Second Conference of the Moroccan ClassificationSociety (pp. 1-6).


[7] Hurrah, N. N., Parah, S. A., & Sheikh, J. A. (2019). A Secure Medical Image Watermarking Technique for E-Healthcare Applications. In Handbook of Multimedia Information Security: Techniques and Applications (pp. 119-141). Springer, Cham.

[8] Khan, M. A., Khan, U. A., Ali, A., Hussain, F.,& Nisar, W. (2019). A Robust Color Image Watermarking Scheme using Chaos for Copyright Protection. Mehran University Research Journalof Engineering and Technology, 38(2), 361-378.

[9] Chang, T. J., Pan, I. H., Huang, P. S., & Hu, C.H. (2019). A robust DCT-2DLDA watermark for color images. Multimedia Tools and Applications, 78(7), 9169-9191.

[10] Kumar, C. V., Natarajan, V., Nirmala, K., Balasubramanian, T., Rao, K. R., & Krishnan, S. (2019). Encrypted separable reversible watermarking with authentication and error correction. Multimedia Tools andApplications, 78(6), 7005-7027.

©IJRASET: All Rights are Reserved | SJ Impact Factor 7.538 | ISRA Journal Impact Factor 7.894 |

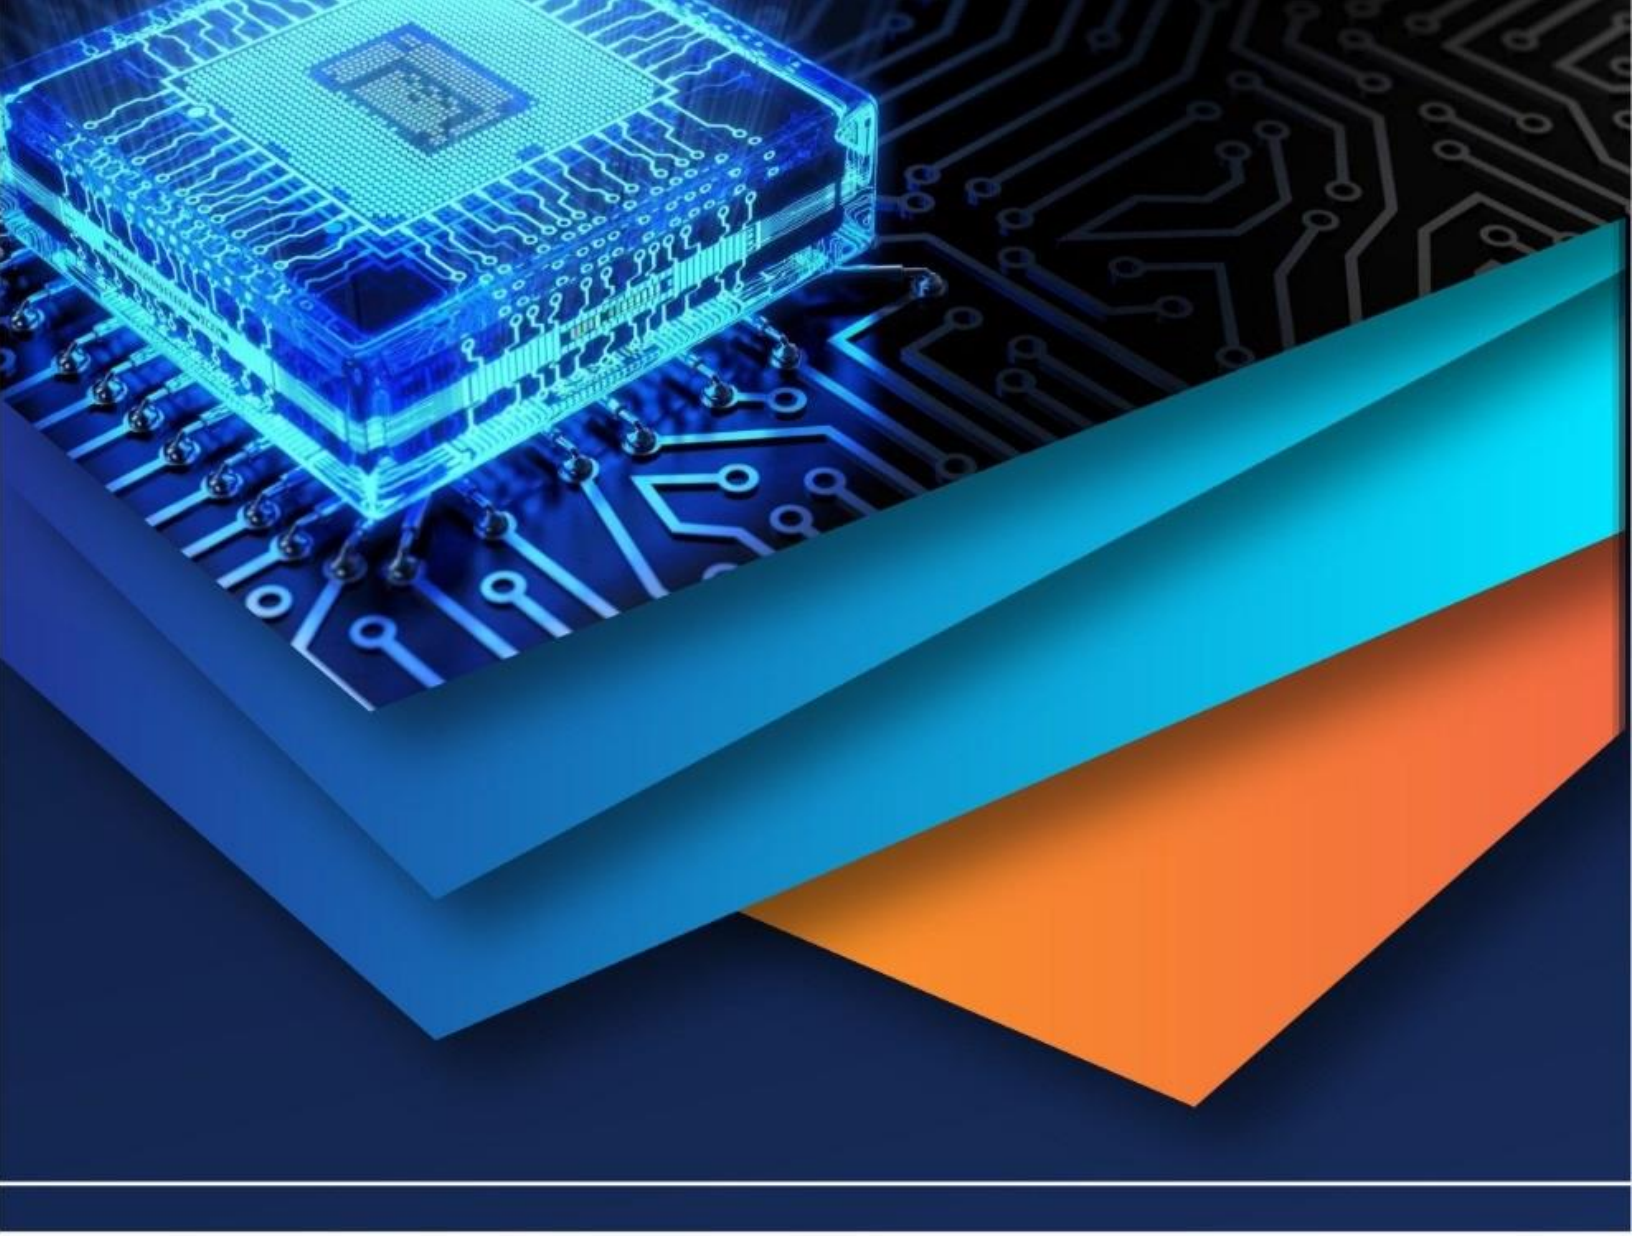

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)