



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume:** 13    **Issue:** VIII    **Month of publication:** August 2025

**DOI:** <https://doi.org/10.22214/ijraset.2025.73768>

**[www.ijraset.com](http://www.ijraset.com)**

**Call:** ☎ 08813907089

**E-mail ID:** [ijraset@gmail.com](mailto:ijraset@gmail.com)

# Efficient Cyberbullying Detection with using Distil BERTa and GLOVE net

SheelaRani CM<sup>1</sup>, Bindhushree K<sup>2</sup>, Gagana D, Monisha M<sup>3</sup>

<sup>1</sup>Assistant Professor, Dept. of CSE Saphagiri College of Engineering

<sup>2</sup>Dept. of CSE Saphagiri College of Engineering

**Abstract:** Cyberbullying is a growing concern in online communities, often leading to severe emotional distress and social isolation. This project presents a cyberbullying detection system that employs GLOVEnet and DistilBERTa to analyze user-generated text and calculate a bullying percentage for each sentence. The system continuously monitors user behavior, dynamically reducing a reputation score based on detected bullying content. When a user's reputation score falls below a predefined threshold, they are automatically blocked from further interaction on various platforms. By combining deep learning and a reputation-based penalty mechanism, this system aims to mitigate cyberbullying incidents while maintaining a fair and proactive moderation process. The solution provides a scalable and effective approach for promoting healthier online environments.

## I. INTRODUCTION

Cyberbullying is the act of harassing or intimidating someone through electronic means such as social media platform, direct messaging, or other digital communication channels. It is now a widespread tool for degrading and humiliating individuals, often causing serious emotional or psychological harm—and in extreme cases, even leading to suicidal behaviour. One of the significant challenges in combating cyberbullying is identifying when it occurs, so that timely and effective intervention can be made. To tackle this problem, a wide range of approaches and innovations have been created over time to help detect and curb cyberbullying at its early stages. The advent of Web 2.0 has significantly transformed social interactions, reshaping the way relationships and friendships are formed and maintained. Adolescents, in particular, spend a substantial amount of time online across various social media platforms. While this digital engagement offers numerous benefits, it also exposes them to risks such as cyberbullying and other forms of online misconduct. Addressing cyberbullying requires a multifaceted approach, considering its psychological, social, and technological dimensions. The automatic spotting and avoidance of such incidents can play a vital part of mitigating their impact. Traditionally, researchers have engaged in conventional Machine Learning (ML) techniques to identify instances of cyberbullying. Deep Neural Networks (DNN) models have gained traction, offering enhanced capabilities for detection. These latest models had been favourable result extended in many media sites, demonstrating promising results in identifying and managing cyberbullying behavior.

Cyberbullying is board diverse in online social networks, making it essential to develop detection model which is very adapting and transferring across different platforms. The key contributions of this study can be briefly outlined as follows:

- 1) To be very predictive accuracy of cyberbullying, a novel framework is proposed that is based on Distil BERTa model. The transformer-based Distil BERTa model make the use of GLOVE features to give optimal results.
- 2) The study involves an assessment of the performance of established machine, deep, and transformer-based learning algorithms applied to cyberbullying data. These models include, KNN, Naives Bayes (NB), bidirectional long short-term memory (BiLSTM), ConvLSTM, Bidirectional Encoder Representations from Transformers (BERTs), and CNN.
- 3) The result of this approach is thoroughly examined through extensive experiments, and a comparative analysis with various state-of-the-art methods is conducted. To validate the robustness of the proposed approach, the results are further substantiated using k-fold cross validation.

Cyberbullying plays a significant major issue in past few years Victims of cyberbullying often experience anxiety, depression, low self-esteem, and feelings of shame, fear, and social isolation. In severe cases, it can lead to self-harm and suicidal thoughts. Cyberbullying is prevalent across virtually all online social networks, highlighting the importance of creating detection models which are both flexible and transferable across various platforms. To figure out the intensity of our approach, we extend our research by reapplying the approaches to a new social media environment, evaluating their adaptability and performance in a different context

## II. BACKGROUND AND MOTIVATION

### A. Anonymity and Online Disinhibition:

The internet allows everybody to experience a little less for their action of event, they are very eager to say or do things they would never do in person, as they don't have to face any consequences.

### B. Boredom or "For Fun":

Some individuals, particularly younger ones, may engage in cyberbullying out of boredom or a misguided sense of entertainment. They may never get the severity of their actions or the real-world harm they are causing

### C. Personal Insecurity and Low Self-Esteem:

Paradoxically, some cyberbullies may have low self-esteem and use bullying as a way to feel better about themselves. By tearing others down, they may temporarily feel a boost to their own self-worth.

## III. LITERATURE SURVEY

### A. Cyberbullying with Social Network: A Difference Between Machine Learning[ML] and Transfers Learning [TL] Approaches, TeohHwai Teng; Kasturi Dewi Varathan 2023.

Machine Learning helps in Versatile, well-established techniques and Transfer Learning also Utilizes knowledge from one domain to enhance performance in another. Varied based on the specific techniques employed and datasets used The main limitation is the immediate useful of Machine Learning limit the generalization of new data and the use of Transfer Learning leads to dependency on the quality and relevance of pre-trained model

### B. Ensembles Learning With Tournaments Selected Ravuri Daniel; T. Satyanarayana Murthy; Ch. D, 2023.

Ravuri Daniel, T. Satyanarayana Murthy, and Ch. D. V. P. Kumari present a methodology that combines the ensemble learning with Tournaments Selected Glowworm Swarm Optimization (GSO) algorithm for detect the cyberbullying on social media. The process starts with preprocessing the test of social media to clean and normalize it, followed by extracting important linguistic and contextual features. To enhance model performance, a modified GSO algorithm with tournament selection is used to choose accuracy. These selected identities are then way passed into multiple classifiers, and their combined output through ensemble learning helps in making more reliable predictions. The method shows improved detection rates compared to standard machine learning approaches.

### C. Safeguarding Online Spaces: A Powerful Fusion of Federated Learning, Word Embeddings, and Emotional Features for Cyberbullying Detection Nagwan Abdel Samee; Umair Khan; Salabat Khan; Mona M. Jamjoom; Muhammad Sharif; Do Hyuen Kim, 2023.

The paper proposes a method that combines federated learning, word embeddings, and emotional features for cyberbullying detection. Text data is first processed using federate learnings, so user privacy is preserved by keeping data on individual devices. Word embeddings capture the meaning of words, while emotional features identify the tone and sentiment of the messages. These are used together to train models, which is then updated to a innovative model without actually sharing personal data. This approach improves the detection accuracy while maintaining privacy.

### D. DEA-RNN:A Hybrid Deep Learning Approaches for Cyberbullying ;Belal Abdullah Hezam Murshed; Jemal Abawajy; Suresha Mallappa; Mufeed Ahmed,2022

Mufeed Ahmed developed a methodology focused on evaluating short-text topic modeling techniques using real-world Twitter datasets, particularly related to cyberbullying and the COVID-19 pandemic. They began by conducting a detailed review of existing models, including probabilistic, embedding-based, and deep learning approaches. After preprocessing the datasets—through cleaning, tokenization, and normalization—they applied selected models to extract topics. To compare model success, they used metrics which evaluates such as topic coherence, cluster purity, normalized mutual information (NMI), and accuracy. This methodology allowed them to assess each model's ability to handle short, sparse, and noisy text, offering insights into their effectiveness and practical application in big data environments



E. “Weakly Supervised Cyberbullying Detection Consistency” *Social Networks and Analysis and Mining*, Raisi, E., & Huang, B., 2018.

The methodology uses a not very strong supervised model called Participant-Vocabulary Consistency (PVC) to see problems in social media conversations. It starts with a small, expert-provided list of known bullying terms (seed vocabulary) and models user interactions as a graph, where users are nodes and messages are edges. Each user is assigned a bully score and a victim score, while each word has a bullying indicator score. The model learns by maximizing consistency between the roles of users and the vocabulary they use—bullying words should appear in messages from likely bullies to likely victims. Through iterative optimization, the model updates both user and vocabulary scores, enabling it to detect bullying behavior and uncover new harmful terms not in the original seed list

F. *When the Timeline Meets the Pipeline: A Survey on Automated Cyberbullying Detection*, Fatima Shannaq; Bassam Hammo; Hossam Faris; Pedro A. Castillo- Valdivieso, 2022.

A transformer-based approach was used to enhance Arabic text classification. The researchers collected a large dataset from online Arabic sources and applied preprocessing steps such as cleaning, normalization, and tokenization. They utilized Arabic-specific BERT models to enhance with the context and meaning of the format more effectively. The model was fine-tuned for tasks like cyberbullying detection. Evaluation using metrics like accuracy, precision, recall, and F1-score showed that the model performed better than traditional before approaches

G. *Cyberbullying Detection and Transfer Learning Approaches*; Teoh Hwai Teng; Kasturi Dewi Varathan, 2023.

A hybrid model was developed by combining CNN and BiGRU to detect cyberbullying in text. Word embeddings are used to convert these text into vectors, which are then passed through some CNN layers to extract local features. Those features were further normally processed by BiGRU layers to capture contextual dependencies. The hybrid approach aimed to improve classification accuracy by leveraging both spatial and sequential information from the input text

H. *Mohammed Al-Hashedi; Lay-Ki Soon; Hui-Ngo Goh; Amy HuiLan Lim; Eu-Gen Siew*, 2023.

Mohammed Al-Hashedi et al. proposed a cyberbullying detection framework that integrates emotional and sentiment features with textual analysis. They used existing datasets from Twitter and Wikipedia, which was next enhanced with emotion and sentiment labels. A BERT-based model was applied to extract emotional indicators such as anger, fear, and guilt. These emotional features, along with sentiment scores, were combined with text embeddings to train deep learning classifiers. This multi-feature approach significantly improved classification performance, especially in recall and F1-score, compared to models using only text data.

I. *Mohammed Hussein Obaid; Shawkat Kamal Guirguis; Saleh Mesbah Elkaffas*, 2023.

In this paper, the authors developed a very hybrid system to detect cyberbullying and determine its severity. They used a dataset of around 47,000 tweets from Kaggle, which were already labeled for bullying. The text data was preprocessed by removing noise and converting it into numerical form using Keras embeddings. A deep learning model with many layers was trained to classify whether a tweet contained bullying content. To go beyond simple detection, the authors used fuzzy logic to evaluate how severe each bullying message was. Based on the model's output, the system could label a message as having low, medium, or high severity. The model was then evaluated using accuracy, recall, and F1-score, achieving over 93% in each metric, showing that the approach was both accurate and effective in handling cyberbullying detection and severity analysis.

#### IV. METHODOLOGY

To effectively capture contextual relationships and semantic nuances within textual data, this study employs BERT (Bidirectional Encoder Representations from Transformers). As a transformer-based model, BERT is well suited for cyberbullying detections tasks because of the deep bidirectional understanding of language, enabling it to identify subtle patterns and cues indicative of harmful or abusive communication.

##### A. Data Collection

Researchers compile datasets from social media platforms, chat logs, or online forums. These datasets are manually or semi-automatically labelled to distinguish between bullying and non-bullying content. In some cases, labels also reflect the severity of the bullying behaviour.

### B. Data Collection

Researchers compile datasets from social media platforms, chat logs, or online forums. These datasets are manually or semi-automatically labelled to distinguish between bullying and non-bullying content. In some cases, labels also reflect the severity of the bullying behaviour.

### C. Preprocessing

Collected text data undergoes cleaning to remove irrelevant elements such as special characters, URLs, and stop words. Tokenization, lowercasing, and text normalization are commonly applied. The text is then transformed into suitable formats like word embeddings for model input.

### D. Model Development

Attention-based models, and transformer frameworks (e.g., BERT). These type of models are infact capable of capture of semantic and contextual patterns in the text, allowing for accurate detection of harmful content. Some systems also provide a bullying severity score rather than a simple binary label.

### E. Reputation Score System

Several approaches incorporate a user-level reputation mechanism. Each user starts with a high score that decreases with every detected bullying instance. The reduction may be proportional to the severity of the content, and systems often allow the score to recover over time if no further bullying is observed.

### F. Blocking Mechanism

To prevent repeated offenses, systems may block users whose reputation scores fall below a certain threshold. This ensures proactive moderation and deters persistent abusive behavior.

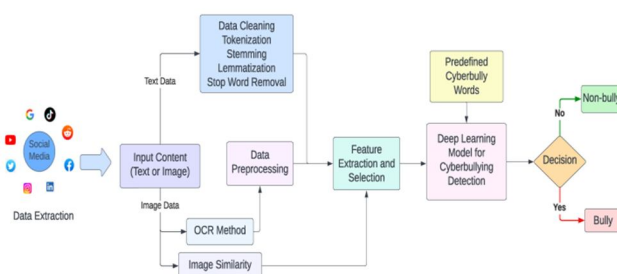


Fig.1.System Architecture

### G. Comparative Analysis

TABLE

Classifier	Accuracy	Precision	Recall	F1 Score
RF	0.90	0.85	0.88	0.87
KNN	0.76	0.75	0.72	0.74
NB	0.78	0.75	0.73	0.74
SVM	0.80	0.81	0.84	0.83
BiLSTM	0.77	0.74	0.79	0.77
Conv LSTM	0.86	0.88	0.90	0.89
BERT	0.84	0.87	0.86	0.86
CNN	0.79	0.76	0.74	0.75
RoBERTa	<b>0.95</b>	<b>0.91</b>	<b>0.93</b>	<b>0.92</b>

## V. CONCLUSION

Distil BERTa is a highly effective model for cyberbullying detection, offering a strong balance between performance and efficiency. By leveraging its pre-trained language understanding and transformer-based architecture, it accurately identifies the complex and nuanced language often found in bullying content.

## REFERENCES

- [1] Y. Xiao, et al., "Multi-Axis Feature Diversity Enhancement for RemoteSensingVideoSuper-Resolution,"*IEEETransactionsonImageProcess-ing*, vol. 34, 2025.
- [2] . Shao, B. Du, C. Wu, M. Gong, and T. Liu, HRSiam: High-resolutionSiamese network, towards space-borne satellite video tracking, *IEE-Trans. Image Process.*, vol. 30, pp. 30563068, 2021.
- [3] . Kaselimi, A. Voodoos, I. Daskalopoulos, N. Doulamis, and A.Doulamis, A vision transformer model for convolution-free multilabelclassification of satellite imagery in deforestation monitoring,*IEEETrans.NeuralNetw.Learn.Syst.*,vol.34,no.7,pp.32993307,Jul.2023.
- [4] Yang, X. Tang, Y.-M. Cheung, X. Zhang, and L. Jiao, SAG Semantic-awaregraphnetworkforremotesensingceneclassefication,*IEEETrans.Image Process.*, vol. 32, pp. 10111025, 2023.
- [5] Guo,Q.Shi,A.Marinoni,B.Du,andL.Zhang,Deepbuildingfootprintupdate network: A semi-supervised method for updating exist ingbuildingfootprintfrombi-temporalremotesensingimages,*RemoteSens.Environ.*, vol. 264, Oct. 2021, Art. no. 112589.
- [6] Li, W. He, W. Cao, L. Zhang, and H. Zhang, UANet: An un-certaintyaware network for building extraction from remote sensingimages,*IEEE Trans. Geosci. Remote Sens.*, vol. 62, 2024, Art. no.5608513.
- [7] He, X. Sun, W. Diao, Z. Yan, F. Yao, and K. Fu, Multimodal remotesensing image segmentation with intuition-inspired hypergraphmodeling,*IEEE Trans. Image Process.*, vol. 32, pp. 14741487, 2023.
- [8] Hou,Q.Cao,R.Ran,C.Liu,J.Li,andL.-J.Deng,Bidomainmodelingparadigm for pan sharpening, in *Proc. 31st ACM Int. Conf.Multimedia*,Oct. 2023, pp. 347357.
- [9] Zhang, Q. Yuan, M. Song, H. Yu, and L. Zhang, Cooperated spectrallow-rankness prior and deep spatial prior for HSI unsupervised denois-ing, *IEEE Trans. Image Process.*, vol. 31, pp. 63566368, 2022.
- [10] Li,K.Zheng,W.Liu,Z.Li,H.Yu,andL.Ni,Model-guidedcoarse-to-fine fusion network for unsupervised hyperspectral image super-resolution, *IEEE Geosci. Remote Sens. Lett.*, vol. 20, pp. 15,2023.
- [11] N.Su,M.Gan,G.-Y.Chen,W.Guo,andC.L.P.Chen,HighSimilarity-Pass attention for single image super-resolution, *IEEE Trans.*
- [12] Jiang,Z.Wang,P.Yi,andJ.Jiang,Hierarchicaldenserecursivenetworkfor image super-resolution, *Pattern Recognit.*, vol. 107, Nov.2020, Art.no.107475.
- [13] .Chen,L.Zhang,andL.Zhang,Cross-sopespatialspectralinformationaggregation for hyperspectral image super-resolution, *IEEE Trans.Image Process.*, vol. 33, pp. 58785891, 2024.
- [14] Protter,M.Elad,H.Takeda,andP.Milanfar,Generalizingthenonlocal-means to super-resolution reconstruction, *IEEE Trans. Image Process.*,vol. 18, no. 1, pp. 3651, Jan. 2009. [14] S. D. Babacan, R. Molina, and
- [15] A. K. Katsaggelos, Variational Bayesian super resolution, *IEEE Trans.Image Process.*, vol. 20, no. 4, pp. 984999, Apr. 2011.
- [16] Chen, L. Zhang, and L. Zhang, MSDformer: Multiscale deformabletransformer for hyperspectral image super-resolution, *IEEE Trans.Geosci. Remote Sens.*, vol. 61, 2023, Art. no. 5525614.
- [17] Xiao, D. Kai, Y. Zhang, X. Sun, and Z. Xiong, Asymmetric eventguided video super-resolution, in *Proc. ACM Int. Conf. Multimedia*,2024, pp. 24092418.
- [18] Xu, L. Zhang, B. Du, and L. Zhang, Hyperspectral anomaly detectionbased on machine learning: An overview, *IEEE J. Sel. Topics Appl.Earth Observ. Remote Sens.*, vol. 15, pp. 33513364, 2022.
- [19] Wang, K. C. K. Chan, K. Yu, C. Dong, and C. C. Loy, EDVR: Videorestitution with enhanced deformable convolutional networks, in *Proc.IEEE/CVFCConf.Comput.Vis.PatternRecognit.Workshops(CVPRW)*,Jun. 2019, p. 0.
- [20] . C. K. Chan, X. Wang, K. Yu, C. Dong, and C. C. Loy, BasicVSR: Thesearchforessentialcomponentsinvideosuper-resolutionandbeyond,in*Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun.2021, pp. 49474956.
- [21] .Isobe,X.Jia,S.Gu,S.Li,S.Wang,andQ.Tian,Videosuperresolutionwith recurrent structure-detail network, in *Proc. Eur. Conf. Comput.*,Aug. 2020, pp. 645660.
- [22] .Xiao,D.Kai,Y.Zhang,Z.-Y.Zha,X.Sun,andZ.Xiong,Eventadaptedvideo super-resolution, in *Proc. Eur.Conf. Comput. Vis.*, Oct. 2024, pp.217235.
- [23] . Jo, S. W. Oh, J. Kang, and S. J. Kim, Deep video super resolutionnetworkusingdynamicupsamplingfilterswithoutexplicitmotioncom-sensation,in*Proc.IEEE/CVFCConf.Comput.Vis.PatternRecognit.*,Jun.2018, pp. 32243232.
- [24] . Yu, J. Liu, L. Bo, and T. Mei, Memory-augmented non-local attentionfor video super-resolution, in *Proc. IEEE/CVF Conf. Comput. Vis.Pattern Recognit. (CVPR)*, Jun. 2022, pp. 1783417843.
- [25] . Xiao et al., Local-global temporal di erence learning for satellite videosuper-resolution,*IEEETrans.CircuitsSyst.VideoTechnol.*,vol.34,no.4, pp. 27892802, Apr. 2024.
- [26] . S. M. Sajjadi, R. Vemulapalli, and M. Brown, Frame-recurrent videosuper-resolution,in*Proc.IEEE/CVFCConf.Comput.Vis.PatternRecog-nit.*, Jun. 2018, pp. 66266634.
- [27] Isobe, F. Zhu, X. Jia, and S. Wang, Revisiting temporal modeling forvideo super-resolution, 2020, arXiv:2008.05765.
- [28] C.K.Chan,S.Zhou,X.Xu,andC.C.Loy,BasicVSR++:Improving video super-resolution with enhanced propagation and alignment, in*Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun.2022, pp. 59725981.
- [29] Liu,H.Yang,J.Fu,andX.Qian,Learningtrajectory-awaretransformerfor video super-resolution, in *Proc. IEEE/CVF Conf. Comput.Vis.Pattern Recognit. (CVPR)*, Jun. 2022, pp. 56875696.
- [30] Kappeler, S. Yoo, Q. Dai, and A. K. Katsaggelos, Video superresolution with convolutional neural networks, *IEEE Trans. Comput.Imag.*, vol. 2, no. 2, pp. 109122, Jun. 2016.
- [31] Haris, G. Shakhnarovich, and N. Ukita, Recurrent back-projectionnetwork for video super-resolution, in *Proc. IEEE/CVF Conf. Comput.Vis. Pattern Recognit. (CVPR)*, Jun. 2019, pp. 38973906.
- [32] Huang,W. Wang, and L. Wang, Bidirectional recurrent convolutionalnetworks for multi-frame super-resolution, in *Proc. Adv. Neural Inf.Process. Syst.*, vol. 28, Dec. 2015, pp. 235243.
- [33] Ilg,N. Mayer, T. Saikia, M. Keuper, A. Dosovitskiy, and T. Brox,FlowNet2.0: Evolutionofoptical flow estimation with deep networks,in*Proc.IEEEConf.Comput.Vis.PatternRecognit.(CVPR)*,Jul.2017, pp.24622470.
- [34] RanjanandM.J.Black,Opticalflowestimationusingaspatalpyramidnetwo rk,in*Proc.IEEEConf.Comput.Vis.Pattern Recognit.(CVPR)*,Jul. 2017, pp. 41614170.
- [35] Caballeroetal.,Real-timevideosuper-resolutionwithspatialtemporalnetworksandmotioncompensation,in*Proc.IEEECComput.Soc.Conf.Comput. Vis. Pattern Recognit.*, Jun. 2017, pp. 47784787.
- [36] Wang, Y.Guo, L.Liu,Z.Lin, X.Deng, and W.An, Deepvideosuper-resolution using HR optical flow estimation, *IEEE Trans. ImageProcess.*, vol. 29, pp.

- 43234336, 2020.
- [37] Shi, J. Gu, L. Xie, X. Wang, Y. Yang, and C. Dong, Rethinking alignment in video super-resolution transformers, in Proc. Adv. Neural Inf. Process. Syst., 2022, pp. 3608136093.
  - [38] Wen, W. Ren, Y. Shi, Y. Nie, J. Zhang, and X. Cao, Video super-resolution via a spatial-temporal alignment network, IEEE Trans. Image Process., vol. 31, pp. 17611773, 2022.
  - [39] Tian, Y. Zhang, Y. Fu, and C. Xu, TDAN: Temporally-deformable alignment network for video super-resolution, in Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR), Jun. 2020, pp. 33603369.
  - [40] Yi, Z. Wang, K. Jiang, J. Jiang, and J. Ma, Progressive fusion video super-resolution network via exploiting non-local spatial-temporal correlations, in Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV), Oct. 2019, pp. 31063115.
  - [41] Luo, L. Zhou, S. Wang, and Z. Wang, Video satellite imagery super-resolution via convolutional neural networks, IEEE Geosci. Remote Sens. Lett., vol. 14, no. 12, pp. 23982402, Dec. 2017. [41] A. Xiao,
  - [42] Z. Wang, L. Wang, and Y. Ren, Super-resolution for jilin-1 satellite video imagery via a convolutional network, Sensors, vol. 18, no. 4, p. 1194, 2018.
  - [43] Jiang, Z. Wang, P. Yi, and J. Jiang, A progressively enhanced network for video satellite imagery super-resolution, IEEE Signal Process. Lett., vol. 25, no. 11, pp. 16301634, Nov. 2018.
  - [44] Liu, Y. Gu, T. Wang, and S. Li, Satellite video super-resolution based on adaptively spatiotemporal neighbors and nonlocal similarity regularization, IEEE Trans. Geosci. Remote Sens., vol. 58, no. 12, pp. 83728383, Dec. 2020.
  - [45] Liu and Y. Gu, Deep joint estimation network for satellite video super-resolution with multiple degradations, IEEE Trans. Geosci. Remote Sens., vol. 60, 2022, Art. no. 5621015.
  - [46] He and D. He, A unified network for arbitrary scales super-resolution of video satellite images, IEEE Trans. Geosci. Remote Sens., vol. 59, no. 10, pp. 88128825, Oct. 2021.
  - [47] Xiao, X. Su, Q. Yuan, D. Liu, H. Shen, and L. Zhang, Satellite video super-resolution via multiscale deformable convolution alignment and temporal grouping projection, IEEE Trans. Geosci. Remote Sens., vol. 60, 2022, Art. no. 5610819.
  - [48] Ni and L. Zhang, Deformable convolution alignment and dynamic scale-aware network for continuous-scale satellite video super-resolution, IEEE Trans. Geosci. Remote Sens., vol. 62, 2024, Art. no. 5610017.
  - [49] Bako et al., Kernel-predicting convolutional networks for denoising Monte Carlo renderings, ACM Trans. Graph., vol. 36, no. 4, pp. 114, Aug. 2017.
  - [50] Mildenhall, J. T. Barron, J. Chen, D. Sharlet, R. Ng, and R. Carroll, Burst denoising with kernel prediction networks, in Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit., Jun. 2018, pp. 25022510.
  - [51] Jiang, B. Wronski, B. Mildenhall, J. T. Barron, Z. Wang, and T. Xue, Fast and high quality image denoising via malleable convolution, in Proc. Eur. Conf. Comput. Vis., 2022, pp. 429446.
  - [52] Chen, X. Dai, M. Liu, D. Chen, L. Yuan, and Z. Liu, Dynamic convolution: Attention over convolution kernels, in Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR), Jun. 2020, pp. 1103011039.
  - [53] Li, X. Tao, T. Guo, L. Qi, J. Lu, and J. Jia, MuCAN: Multicorrespondence aggregation network for video super-resolution, in Proc. 16th Eur. Conf. Comput. Vis. (ECCV), Glasgow, U.K. Springer, Aug. 2020, pp. 335351.
  - [54] Isobe et al., Video super-resolution with temporal group attention, in Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR), Jun. 2020, pp. 80088017





10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)