



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 12 Issue: IV Month of publication: April 2024

DOI: https://doi.org/10.22214/ijraset.2024.60268

www.ijraset.com

Call: © 08813907089 E-mail ID: ijraset@gmail.com



ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538

Volume 12 Issue IV Apr 2024- Available at www.ijraset.com

### Parkinson's Disease Detection Using Machine Learning

Chandraprabha Sahu<sup>1</sup>, Maya Yadav<sup>2</sup>, Parth Singh Dhruwe<sup>3</sup>, Arpita Singh<sup>4</sup>, Samiksha Shukla<sup>5</sup>

1, 2, 3, 4B. Tech Student, <sup>5</sup>Assistant Professor, Department of Information Technology, Government Engineering College,

Bilaspur(C.G.).

Abstract: Parkinson's disease is progressive nervous system disorder that affects movement leading to shaking, stiffness, and difficulty with walking, balance, and coordination. Parkinson's symptoms begin gradually and get worse over time. It has 5 stages to it and estimated seven to 10 million people worldwide have Parkinson disease. This is chronic and still has no cure. It is a neurodegenerative disease that affects the neurons in the brain that contain dopamine. There is a model, in which using machine learning techniques we can detect Parkinson's disease depending upon certain medical procedures. We used support vector machine for this and use the sklearn library to prepare the dataset. This gives the accuracy of 88%. In our model we used the dataset which contains biomedical voice measurements from 31 people. From the whole data 20% is used for testing and 80% is used for training. The data of any person is entered to check whether the person has Parkinson or not. The status column is set to 0 for healthy person and 1 for person having Parkinson disease.

### I. INTRODUCTION

Parkinson's disease is considered a neurodegenerative disease because it involves the degeneration and death of neurons. It is most frequently seen in adults over the age of 50. The most recognizable symptoms of Parkinson's initially are movement-related and generally involve a tremor, slow movement and rigidity. The cause of Parkinson's are not fully understood, but a combination of genetic and environmental factors are likely involved. In this model, we accurately detect the presence of Parkinson's disease in an individual based on the huge data collected. By using machine learning algorithm, will predict the person is having Parkinson's or not.in this model a huge amount of data is collected from the normal person and previously affected person by Parkinson's disease.

### II. RELATED WORKS

"Parkinson's progression prediction using ml and serum cytokines" by Glenda-M Halliday and Niccholas, 25-july-2019. Serum samples from a clinic are tested to detect Parkinson's disease, and the same samples are tested using ML algorithms for detecting Parkinson's disease. Bhauwendraat, C., Bandres-Ciga, S., and Singleton, A.B. using voice to predict progression in Parkinson's disease patients. Das R. "A comparison of multi classification methods for the diagnosis of Parkinson's disease". Methods used to test Parkinson's disease include ML, DM neural, regression, and decision trees, with ML showing high performance.

### III. PROPOSED METHODOLOGY

In this proposed methodology, we aim to develop a robust and accurate Support Vector Machine-based diagnostic tool for early detection and management of Parkinson's disease, thereby improving patient outcomes and facilitating personalized treatment strategies.

### A. Data Flow Diagram

Data flow diagram show the flow of data between various elements of a system in graphical form. It also expresses the requirement of the system and shows the current system is implemented.

In the first step we will collect comprehensive dataset comprising clinical data, genetic information, and other relevant biomarkers from Parkinson's disease patients.

After that, preprocess the data to ensure quality and consistency, including data cleaning, missing values imputation, normalization, and standardization.

Then classify the data into Train and Test datasets, apply Support Vector Machine Classifier to train the model. The dataset will be used to predict whether the patient has Parkinson's disease or not.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue IV Apr 2024- Available at www.ijraset.com




Fig. 1 Data Flow Diagram

### B. System Design

The proposed architecture has four parts where it involves Data Acquisition, feature Extraction, Classification, and Output Production. By following this system design, the proposed Parkinson's disease detection system using Support Vector Machine algorithm can effectively leverage machine learning techniques to assist clinicians in early diagnosis and management of the disease, thereby improving patient outcomes and healthcare delivery.

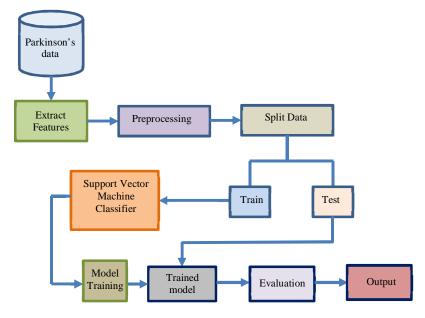


Fig. 2 System Design

### C. Modules

### 1) Data Extraction

Import all the necessary dependencies, which is required for data cleaning, data analysis and model building. Read the Data into a DataFrame and get first five records. Get the features and labels from the DataFrame. Features are all the columns expect 'status', and the labels are those in the 'status' column. Fig. 3 shows importing the necessary dependencies.

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue IV Apr 2024- Available at www.ijraset.com

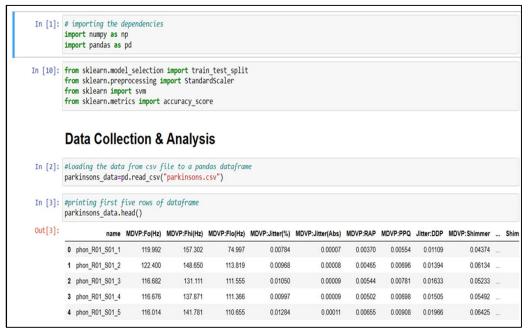


Fig. 3 Importing the dependencies

### 2) Data cleaning

The imported dataset is check for the missing values for each of the columns to build the error free model. The next step is to get the statistical measures about the data which gives us several statistical measures like mean, percentage value, and minimum value. Fig. 4 explains data analysis and Fig. 5 explains statistical measures about the data.



Fig. 4 Data Analysis



### International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue IV Apr 2024- Available at www.ijraset.com



Fig. 5 Statistical measures about the data

### 1) Splitting the Dataset into Training and Testing Data

The data is split into training data and testing data were training data will be used to train the machine learning model and testing data is used to evaluate the model to check the performance of the model. We used train\_test\_split function so it will automatically split this data in a random way. Inside this we need to mention x and y, were x represents the training data features and y represents corresponding labels. The dataset is split into 80% of training data and 20% testing data. Fig. 6 shows the data splitting.

```
Splitting the data to training data & test data
In [14]: X_train, X_test, Y_train, Y_test=train_test_split(X, Y, test_size=0.2, random_state=2)
In [15]: print(X.shape, X_train.shape, X_test.shape)
         (195, 22) (156, 22) (39, 22)
         Data Standardization
In [16]: s=StandardScaler()
In [17]: s.fit(X train)
Out[17]: StandardScaler()
         In a Jupyter environment, please rerun this cell to show the HTML representation or trust the notebook.
         On GitHub, the HTML representation is unable to render, please try loading this page with nbviewer.org.
In [18]: X_train=s.transform(X_train)
        X test=s.transform(X test)
In [19]: print(X train)
         [[ 0.63239631 -0.02731081 -0.87985049 ... -0.97586547 -0.55160318
          [-1.05512719 -0.83337041 -0.9284778 ... 0.3981808 -0.61014073
         0.39291782]
[ 0.02996187
                       -0.29531068 -1.12211107 ... -0.43937044 -0.62849605
           -0.50948408]
```

Fig. 6 Data Splitting

### 2) Model building

SVM classifier is used to train the model and classify the data into classes here the two classes are person with Parkinson and without Parkinson. We trained support vector machine model with training data. The data is fit into the support vector machine model. The next step is to evaluating the model, in this we find the accuracy score of the model is 88%. Fig. 7 shows the model building.



### International Journal for Research in Applied Science & Engineering Technology (IJRASET)

ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.538 Volume 12 Issue IV Apr 2024- Available at www.ijraset.com

```
Building a Predictive System
In [30]: input_data=(95.05600,120.10300,91.22600,0.00532,0.00006,0.00268,0.00332,0.00803,0.02838,0.25500,0.01441,0.01725,0.02444,0.04324
                                 # changing input data into numpy array
                               input_data_as_numpy_array=np.asarray(input_data)
                                 #reshape the numpy array
                               input\_data\_reshaped=input\_data\_as\_numpy\_array.reshape(1,-1)
                                      standardized the data
                               std_data=s.transform(input_data_reshaped)
                               prediction=model.predict(std data)
                                 print(prediction)
                               if(prediction[0]==0):
                                            print("The Person does not have parkinson disease")
                               else:
                                            print("The Person has Parkinsons")
                                [1]
                                 The Person has Parkinsons
                                 \verb|C:\Users\owner\AppData\Local\Programs\Python\Python39\lib\site-packages\sklearn\base.py: 464: User\Warning: X does not have valid to the packages of the 
                                 feature names, but StandardScaler was fitted with feature names
                                     warnings.warn(
```

Fig. 7 Model Building

### IV. CONCLUSION

Parkinson's disease is a progressive disorder that affects the nervous system and the parts of the body controlled by the nerves. Parkinson's disease can't be cured. Therefore it is important to diagnose it early. We used SVM classifier for early detection of Parkinson's disease. To diagnose Parkinson disease in patients we use machine learning model. This model provides diagnostics on time, in this way it reduce treatment costs. The algorithm that is used in this ml model is better than other algorithms. This model is also beneficial for medical students like they can use this as a teaching tool. This ML model can predict Parkinson's disease with high accuracy by the help of different data like spiral images, medical records etc.

### REFRENCES

- [1] Arvind Kumar Tiwari, "Machine Learning based Approaches for Prediction of Parkinson's Disease," Machine Learning and Applications- An International Journal(MLAU)vol.3, June 2016.
- [2] Z. A. Dastgheib, B. Lithgow, and Z. Moussavi, "Diagnosis of Parkinson's disease using electrovestibulography," Medical & Biological Engineering & Computing, vol. 50, no. 3, pp.365-373,2017.
- [3] Yatharth Nakull, Ankit Gupta2, Hritik Sachdeva3,, "Parkinson Disease Detection Using Machine Learning Algorithms" International Journal of Science and Research (ISJR) ISSN: 2319-7064 SJIF (2020): 7.803 Volume 10 Issue 6, June 2021.
- [4] M. Abdar and M. Zomorodi-Moghadam, "impact of Patient's Gender on Parkinson's disease using Classification Algorithim" Journal of AI and Data Mining, vol. 6, 2018.
- [5] Dr. Anupam Bhatia and RaunakSulekh, "Predictive model for Parkinson's Disease through Naïve Bayes Classification" International Journal of Computer Science & Communication vol. 9, March 2018.









45.98



IMPACT FACTOR: 7.129



IMPACT FACTOR: 7.429



## INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call: 08813907089 🕓 (24\*7 Support on Whatsapp)