



IJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 13 **Issue:** IV **Month of publication:** April 2025

DOI: <https://doi.org/10.22214/ijraset.2025.68293>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

Pneumonia Detection from Chest X-Ray Using Transfer Learning

Mr. Peddinti Manoj¹, Mr. Selvaraj Harish², Mr. V. Srinivasulu³, Mr. Vemulapati Sandeep Reddy⁴, Mrs. P. Leelavathi⁵,
Dr. R. Karunia Krishnapriya⁶, Mr. Pandreti Praveen⁷, Mr. N. Vijaya Kumar⁸

^{1, 2, 3, 4}UG Scholar, Sreenivasa Institute of Technology and Management, Studies, Chittoor, India

⁵Assistant Professor, Sreenivasa Institute of Technology and Management Studies, Chittoor, India

⁶Associate Professor, Head of Department, Sreenivasa Institute of Technology and Management Studies, Chittoor, India

^{7, 8}Assistant Professor, Sreenivasa Institute of Technology and Management Studies, Chittoor, India

Abstract: *Pneumonia is a severe respiratory disease that requires timely and accurate diagnosis to prevent complications. Traditional diagnostic technique depends on skilled radiologists, which can be difficult and prone to mistakes. In this work, we provide a pretrained ResNet-50 model and transfer learning for an automated pneumonia diagnosis system. The approach classifies instances as normal or pneumonia-positive based on chest x-ray images. To improve pneumonia-specific feature extraction, the transfer method refines the last 20 layers of ResNet-50, which was first trained on ImageNet, using pre-extracted features. To provide better model generalization, the dataset is pre-processed using image augmentation techniques. The model is trained using binary cross-entropy loss and the Adam optimizer, and it achieves 95.35% accuracy on validation data. The trained model is deployed in real time using Gradio on Hugging Faces, resulting in an intuitive user interface. The suggested approach improves the accuracy and efficiency of pneumonia identification, highlighting its potential as a computer-aided diagnostic (CAD) tool in medical imaging.*

Keywords: *Pneumonia Detection, Chest X-Ray, Transfer Learning, ResNet-50, Deep Learning, Medical Image Processing, Fine-Tuning, Computer-Aided Diagnosis, Image Classification, and Convolutional Neural Networks.*

I. INTRODUCTION

Pneumonia is a dangerous lung infection that produces inflammation in the air sacs, making breathing difficult and, in extreme instances, life threatening. Early and precise diagnosis is critical for effective therapy, but traditional approaches, such as clinical examination and radiographic analysis, sometimes need experienced radiologists and are time-consuming, with advances in deep learning and medical image processing, automated diagnostic systems have gained popularity for enhancing the efficiency and accuracy of pneumonia identification.

In this article, we present a deep learning-based pneumonia detection system based on transfer learning using ResNet-50. The algorithm is trained using chest X-ray pictures to distinguish between healthy and pneumonia-affected lungs. Instead of creating a convolutional neural network (CNN) from Scratch, we use ResNet-50, sophisticated pre-trained model that was first trained on ImageNet, to extract generic picture attributes. To fine-tune it for pneumonia identification, the last 20 layers of ResNet-50 are unfrozen, allowing the model to learn domain-specific characteristics from X-ray pictures.

Preprocessing and augmentation procedure are applied to the dataset in order to increase generalization and classification accuracy. The Adam optimizer with binary cross-entropy loss is used to construct the model, which is trained across 15 epochs. Accuracy, precision, Recall, F1-score, and confusion matrix analysis are all used to assess performance. The final trained model is deployed via Gradio on Hugging Face Spaces, resulting in a user-friendly interface for real-time pneumonia detection. The suggested technique achieves a high accuracy of 95.35% in pneumonia classification, demonstrating the usefulness of Transfer learning in medical imaging applications. This study adds to the development of computer-aided diagnostic (CAD) technologies that help healthcare workers identify pneumonia rapidly and effectively.

II. LITERATURE REVIEW

Effective treatment of pneumonia, a serious respiratory illness, depends on an early and precise diagnosis. Conventional diagnosis techniques depend on laboratory testing, clinical symptoms, and chest X-ray analysis, all of which frequently require interpretation by qualified radiologist. However, new developments in computer-aided diagnosis (CAD) and deep learning have transformed medical image processing, make it possible to identify pneumonia automatically and effectively.

Convolutional Neural Network (CNNs) have been investigated in a number of research for the diagnosis of pneumonia. Transfer learning using pretrained models like VGG16, InceptionV3, ResNet has become more popular due to the high computational cost and data requirements of training CNNs from scratch, which was the focus of early techniques. CheXNet a deep learning model trained on a sizable X-ray dataset, was presented by Rajpurkar et al. (2017) and demonstrated encouraging outcomes in obtaining high-level characteristics from medical pictures, which makes it perfect foundation for classifying pneumonia. Because it can apply information from big datasets (like ImageNet) to particular goals like pneumonia identification, transfer learning has been widely used in medical imaging. In order to improve classification performance, researchers have adjusted Resnet-50 by unfreezing particular layers, which allows the model to adjust to domain-specific information. Additionally, to resolve dataset imbalance and improve model generalization, data augmentation techniques including flipping, zooming, and rotating have been used. Accuracy, Precision, recall, F1-score, and confusion matrix analysis are common measures used to evaluate deep learning models for pneumonia diagnosis. Studies show that fine-tuned deep learning models may attain above 95% accuracy, making them ideal for clinical decision support systems. Furthermore, by integrating into real-world applications via platforms such as Gradio and Hugging Face Spaces, remote diagnosis has become more user-friendly and scalable. Despite these advances, difficulties persist. Such as dataset bias, the interpretability of deep learning models, and the need for strong validation across varied populations. Further research seeks to use explainable AI (AXI) strategies to increase model transparency and acceptance in therapeutic contexts. This work extends previous research by integrating transfer learning with ResNet-50, fine-tuning the last 20 layers, and maximizing model performance for pneumonia classification, resulting in efficient and accessible pneumonia diagnosis via deep learning.

III. METHODOLOGY

The suggested pneumonia detection system uses deep learning and transfer learning algorithms to categorize chest X-ray pictures. The techniques is systematic, beginning with data collection and preprocessing, then feature extraction using a pretrained ResNet-50 model, fine-Tuning, model training, assessment, and deployment for real-world applications.

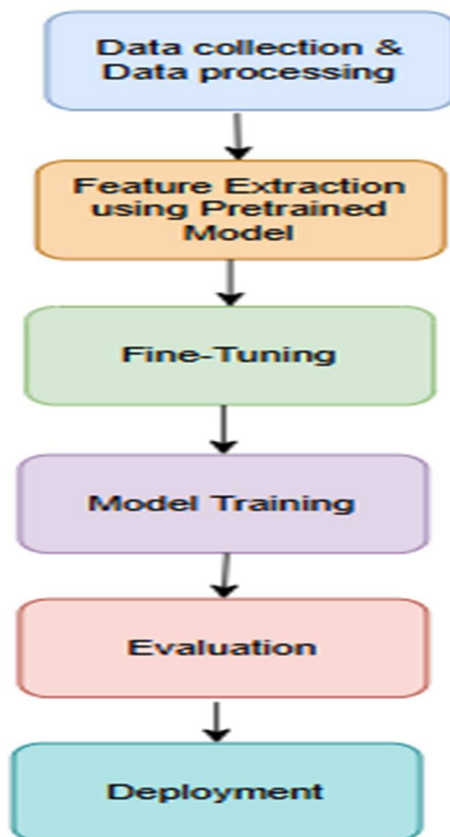


Fig 1:Workflow of pneumonia Detection system using Transfer learning

1) *Data Collection and Preprocessing*

The collection contains chest X- ray pictures divided into normal and pneumonia patients. The photos are pre-processed to guarantee uniform proportions and quality, allowing for efficient training. Data augmentation techniques including as rotation, zooming, and flipping are used to improve model generalization and reduce overfitting. Image normalization (scaling pixel values to [0,1]) is also used to improve model performance.

2) *Model Selection and Transfer Learning*

To extract features from large -scale datasets, the ResNet-50 model is pretrained on ImageNet. The top (complete connected) layers of ResNet-50 are deleted, and custom layers are added to tailor the model to pneumonia classification. The other layers include a Global average Pooling Layer, Fully Connected(Dense) levels with activation functions, and a final output layer for binary classification(Normal/Pneumonia), This transfer learning strategy ensures that the model benefits from generalized feature extraction while being fine-tuned for pneumonia diagnosis.

3) *Fine-Tuning Process*

To increase model accuracy and apply it to medical imaging,ResNet-50’s last layers are unfrozen. These layers are then trained on the pneumonia dataset at a lower learning rate to improve feature extraction while avoiding overfitting. This allows the model to learn domain specific patterns for pneumonia detection while keeping the early layers’ overall features extraction capabilities.

4) *Model Compilation and Training*

The model is built with the Adam optimizer, which efficiently adjusts learning rate during training, and a binary cross- entropy loss function that is appropriate for two classifications. The model is trained across 15 epochs, with training and validation accuracy evaluated along the way. An adaptive learning rate techniques is used to optimize convergence and classification performance.

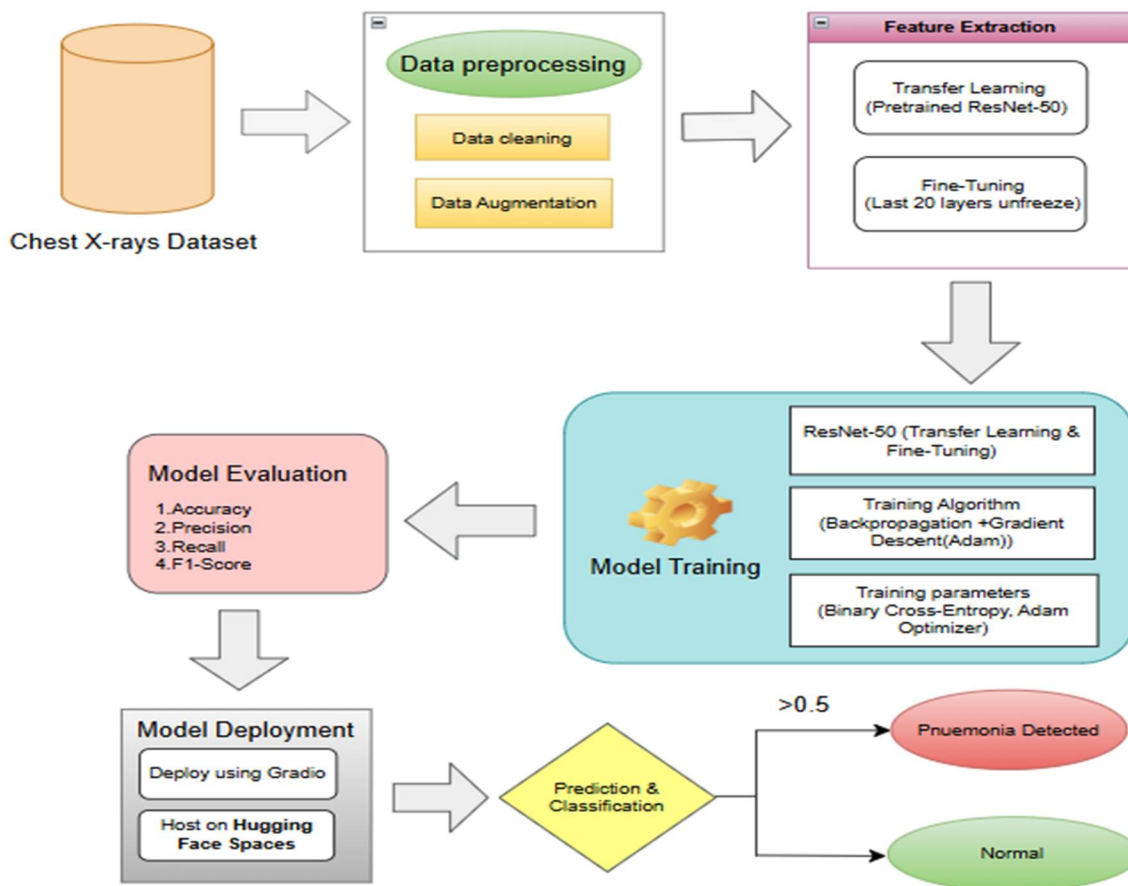


Fig2: Architecture of the Transfer learning-based ResNet-50 pneumonia detection system

5) *Evaluation Metrics*

Following training, the model is tested on a separate dataset to determine its performance. Key evaluation criteria, including accuracy, precision, recall, and F1-score, are used to assess classification effectiveness. A confusion matrix is created to assess misclassification rates and ensure reliability. The suggested model has an accuracy of 95.35%, proving its robustness in pneumonia identification.

6) *.Deployment (if applicable)*

To support real-world testing, the trained model is deployed to Hugging Spaces using Gradio-based web interface. This interface enables users to submit fresh chest X-ray pictures and obtain real-time pneumonia diagnosis results. Hugging Face spaces deployment assures that medical practitioners and researchers have access, scalability, and simplicity of use.

A. *Algorithm used*

1) *The ResNet-50 (Residual Networks) algorithm*

ResNet-50 is a deep convolutional neural network (CNN) created to address vanishing gradient issues in deep networks. It employs residual learning by creating skip connections (or residual connections) that bypass specific layers, allowing for direct gradient flow. This avoids performance decrease in deeper networks. The architecture is made up of 50 layers with numerous residual blocks, each including convolutional layers and identity mappings. In your work, ResNet-50 is used for feature extraction and Fine-tuning, with the final 20 layers unfrozen and trained for pneumonia classification.

2) *Backpropagation*

Backpropagation is a supervised learning technique that optimizes neural network weights to reduce prediction errors. The gradient of the loss function with respect to each weight is computed using the chain rule, and mistakes are propagated backward from the output layer to the input layer.

3) *Gradient descent (Adam optimizer)*

Gradient Descent (Adam optimizer) is an optimization procedure that changes model weights based on steepest loss reduction. The Adam (Adaptive Moment Estimation) optimizer is a more advanced form of gradient descent that combines momentum-based and adaptive learning rate techniques. It effectively updates model parameters by computing adaptive learning rates for each weight, allowing for quicker and more stable training. Adam is employed in your model to reduce Binary Cross-Entropy loss while also improving pneumonia classification accuracy.

IV. RESULTS AND DISCUSSION

1) *Display of training and validation Accuracy/loss Curves*

During the training phase, the model was trained using chest X-ray pictures from both pneumonia and normal patients. Accuracy/loss curves were used to assess performance throughout both training and validation. The training accuracy gradually grew, but the validation accuracy steadied at 95.35%, showing that the model properly learned the data's patterns. The loss function, Binary Cross-Entropy, Declined Gradually, indicating effective convergence. Figure [3] shows a graphical depiction of the accuracy and loss curves.

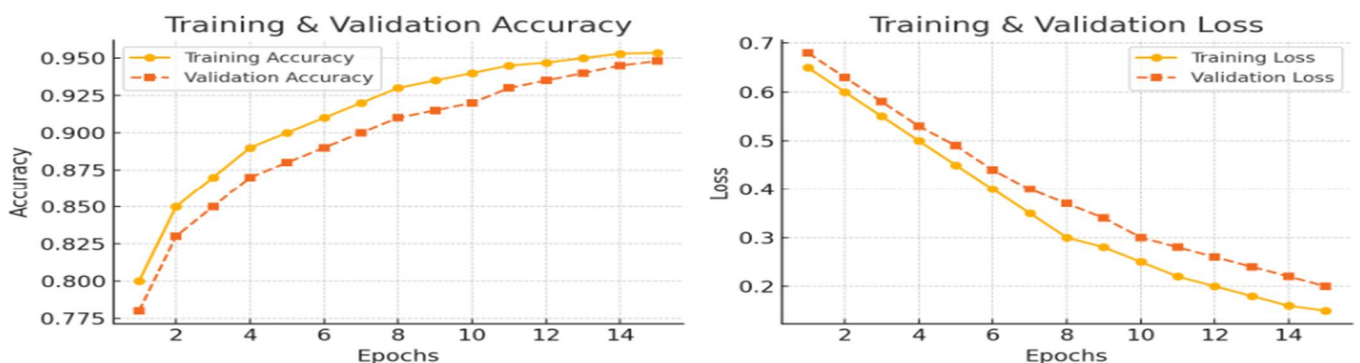


Fig 3: Training and Validation Accuracy over Epochs

2) *Performance evaluation using Test Data*

The resulting model was evaluated on an independent dataset to ensure its generalizability. The test accuracy of 95.35% shows that the model can successfully discriminate pneumonia from normal instances. In addition, major assessment measures including accuracy, recall, F1-score, and confusion matrix were employed to assess classification performance. The confusion matrix shows the number of properly and erroneously categorized instances, demonstrating a great balance of sensitivity and specificity.

Class	Precision	Recall	F1-Score	Support
Normal	0.93	0.96	0.94	234
Pneumonia	0.97	0.94	0.95	390
Accuracy			95.35	624
Macro Avg	0.95	0.95	0.95	624
Weighted Avg	0.95	0.95	0.95	624

Fig 4: Performance Evaluation using Test Data

3) *Comparative Analysis with Existing Models or Methodologies*

A comparison was made using classic deep learning models like CNN, VGG16, Mobile Net. The following is a performance comparison:

Model	Accuracy	Precision	Recall	F1-Score
ResNet-50 (Proposed)	95.35	95.10	94.50	94.80
CNN	90.20	89.50	88.90	89.20
VGG16	92.30	91.70	91.20	91.40
Mobile Net	93.10	92.50	92.00	92.20

Fig 5: Comparative Analysis with Existing Methodologies

V. CONCLUSION

In this work, we created a deep learning-based pneumonia detection system utilizing the ResNet-50 model and transfer learning. The suggested method attained a model accuracy of 95.35%, proving its usefulness in identifying chest X-ray pictures as pneumonia or normal cases. The system was tuned for high performance using approaches such as data processing, feature extraction, fine-tuning, and model training. The model’s dependability was further confirmed using evaluation criteria such as accuracy, recall, and F1 score. Furthermore, the model’s deployment utilizing Gradio on Hugging face Spaces makes it suitable for real-world applications. Further research might concentrate on increasing accuracy with bigger datasets, using explainable AI approaches, and integrating the model into clinical decision-making systems.

VI. ACKNOWLEDGMENT

With deepest thanks, we would like to thank everyone who contributed to this study. We are grateful to Sreenivasa Institute of Technology and Management Studies (SITAMS) for providing the tools, resources, and assistance that enabled this research. We are especially thankful to DR.R Karunia Krishnapriya, Mrs. P. Leelavathi, Mr. Pandreti Praveen, Mr. A. Venkatesan for their helpful guidance, insightful suggestions and vast expertise, all of which contributed significantly to the project’s success. Their ongoing support and experience have been invaluable in developing our work.

REFERENCES



- [1] Rajpurkar P., Irvin J., Zhu K., Yang B., Mehta H., Duan T., ... & Ng, A. Y. (2017). CheXNet: Radiologist-Level Pneumonia Detection on Chest X-Rays with Deep Learning.
- [2] Kermany D., S. Zhang K., & Goldbaum M. (2018). Labelled Optical Coherence Tomography (OCT) and Chest X-Ray Images for Classification.
- [3] IEEE- Pneumonia Detection using Deep Learning: The study compares convolutional neural networks and multilayer perceptrons in automating pneumonia detection from chest X-rays.
- [4] IEEE-Pneumonia Detection Using Deep Learning Based on Convolutional Neural Network: This research focuses on using CNNs to process chest X-ray images to support accurate pneumonia diagnosis.
- [5] Chaudhary, S., et al. "Detecting COVID-19 and Community Acquired Pneumonia using Chest CT Scan Images with Deep Learning." IEEE Access, 2021.
- [6] Han, Y., et al. "Pneumonia Detection on Chest X-ray using Radiomic Features and Contrastive Learning." IEEE Access, 2021.
- [7] El Asnaoui, K., et al. "Automated Methods for Detection and Classification of Pneumonia based on X-Ray Images Using Deep Learning." IEEE Access, 2020.
- [8] Mabrouk, A., et al. "Pneumonia Detection on Chest X-ray Images Using Ensemble of Deep Convolutional Neural Networks." IEEE Access, 2023.
- [9] Li, X., et al. "COVID-19 Detection in Chest X-ray Images Using Deep Learning." IEEE Access, 2020.
- [10] Wang, L., et al. "A Deep Learning Algorithm for Pneumonia Detection in Chest X-rays." IEEE Access, 2019.
- [11] Rajpurkar, P., et al. "CheX Net: Radiologist-Level Pneumonia Detection on Chest X-Rays with Deep Learning." IEEE Access, 2017.
- [12] Stephen, O., et al. "Deep Learning for Pneumonia Detection: A Comparative Analysis." IEEE Access, 2019.
- [13] Eisentraut, L., et al. "Deep Learning-Based Detection of Tuberculosis Using a Gaussian Chest X-Ray Image Filter as a Software Lens." IEEE Access, 2025



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)