



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 3

Issue: III

Month of publication: March 2015

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

An Efficient System to Access Network Using Time Based Scheduling and Automatic Database Creation Using Data Perturbation

G.Vijaymurali¹, J.Nulynpunitha², P.Kanimozhi³
^{1,2,3} IFET College of Engineering, Villupuram, India

Abstract: *With the wide deployment of public cloud computing infrastructures the time constrain based system is required. Using clouds to host data query services has become an appealing solution for the advantages on scalability and cost-saving. The time based scheduling to provide the net connectivity is a latest field to benefit both customer and service provider. The time based scheduling allows the customer to use net services for the purchased time with great speed. The same user can use the net for the duration he purchases. It is equally useful to the service provider as they don't need to provide any slow net connection even when the customer's data plan is over.*

Keywords: *Public Cloud Infrastructure, Time Allocation, Net Scheduling.*

I. INTRODUCTION

HOSTING data-intensive query services in the cloud is increasingly popular because of the unique advantages in scalability and cost-saving. With the cloud infrastructures, the service owners can conveniently scale up or down the service and only pay for the hours of using the servers. This is an attractive feature because the workloads of query services are highly dynamic, and it will be expensive and inefficient to serve such dynamic workloads with in-house infrastructures [2]. However, because the service providers lose the control over the data in the cloud, data confidentiality and query privacy have become the major concerns. Adversaries, such as curious service providers, can possibly make a copy of the database or eavesdrop users' queries, which will be difficult to detect and prevent in the cloud infrastructures. While new approaches are needed to preserve data confidentiality and query privacy, the efficiency of query services and the benefits of using the clouds should also be preserved. It will not be meaningful to provide slow query services as a result of security and privacy assurance. It is also not practical for the data owner to use a significant amount of in-house resources, because the purpose of using cloud resources is to reduce the need of maintaining scalable in-house infrastructures.

Therefore, there is an intricate relationship among the data confidentiality, query privacy, the quality of service, and the economics of using the cloud. We summarize these requirements for constructing a practical query service in the cloud as the CPEL criteria: data confidentiality, query privacy, efficient query processing, and low in-house processing cost. Satisfying these requirements will dramatically increase the complexity of constructing query services in the cloud. Some related approaches have been developed to address some aspects of the problem. However, they do not satisfactorily address all of these aspects. For example, the cryptindex [12] and order preserving encryption (OPE) [1] are vulnerable to the attacks. The enhanced cryptindex approach [14] puts heavy burden on the in-house infrastructure to improve the security and privacy. The New Casper approach [23] uses cloaking boxes to protect data objects and queries, which affects the efficiency of query processing and the inhouse workload. We have summarized the weaknesses of the existing approaches in Section 7. We propose the random space perturbation (RASP) approach to constructing practical range query and knearest- neighbor (kNN) query services in the cloud. The proposed approach will address all the four aspects of the CPEL criteria and aim to achieve a good balance on them. The basic idea is to randomly transform the multidimensional data sets with a combination of order preserving encryption, dimensionality expansion, random noise injection, and random project, so that the utility for processing range queries is preserved. The RASP perturbation is designed in such a way that the queried ranges are securely transformed into polyhedra in the RASP-perturbed data space, which can be efficiently processed with the support of indexing structures in the perturbed space. The RASP kNN query service (kNN-R) uses the RASP range query service to process kNN queries. The key components in the RASP framework include 1. the definition and properties of

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

RASP perturbation; 2. the construction of the privacy-preserving range query services; 3. the construction of privacy-preserving kNN query services; and 4. An analysis of the attacks on the RASP-protected data and queries.

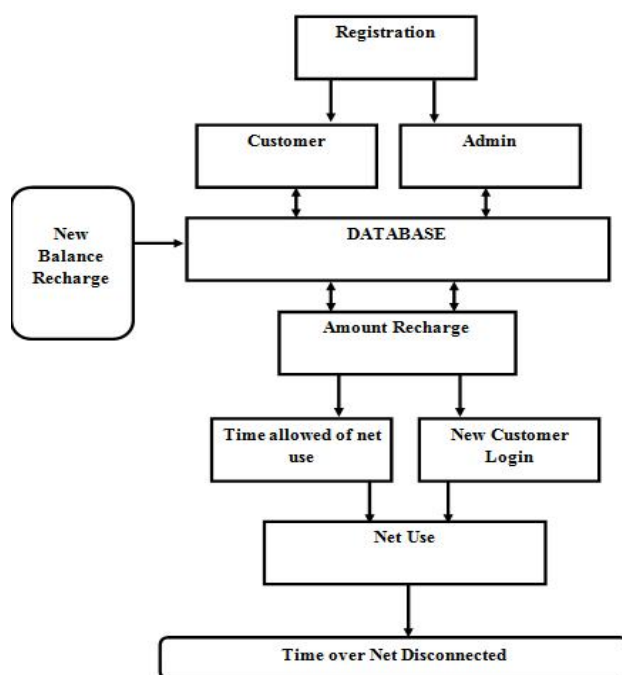


Fig: 1 System Architecture

II. PROPOSED AND EXISTING SYSTEM

A. Objective

- 1) To create a system with time based net connection facility.
- 2) To overcome the limitation of every time username password allowance.
- 3) To create the secure system for correct access and amount addition.

B. Existing System

Data usage based net connection facility with gradual decrease of data and amount.

In already available systems there is system of amount recharge and for the corresponding recharge we receive the data balance. Once the balance over as per the data use net connection gets over.

1) Disadvantages of Existing System

- a) Cost as per data rate not as per time.
- b) Data rate boundancy, if data balance over in 2 days next 28 days gets wasted from a 30 days plan.
- c) Non beneficial for customers and even for the service providers.

2) Proposed System

- a) Our work is intended to deal with the combined feature of time based net facility and data reduction demonstration in real time.
- b) We propose to create a system which overcomes the limitation of every time username password allowance and to create the secure system for correct access and amount addition.

C. Advantages of Proposed System

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- a) Cost as per time not as data rate.
- b) Data rate management and best for the users who use net connection in office time and do not work on nights.
- c) Beneficial for customers and even for the service providers.

III. WORKING MODULES

Account Creation

- 1. Customer 2. Admin

Amount Recharge

- 1. New Recharge 2. Recharge Updation

Net Use Time Issue


Data Disconnection on time over

Database Creation and Updation

IV. MODULES DESCRIPTION


A. User Registration

- 1) We first need to register as the admin or the customer so that we can update recharge amount or do new transaction.
- 2) The dual login system can be created where all the details should be filled in the GUI form.

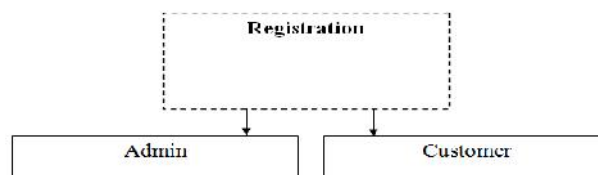


B. Database

- 1) We need to create database in real time so that it can be used by both customer and admin to update and select the desired options and match.
- 2) The database will be executed using SQL server 2008 and the execution can be done using visual Studio 2010.



C. New/Old Sale Module


- 1) Once we provide the login there comes the customer to recharge the amount.
- 2) Based on our product sale requirement we select the option.

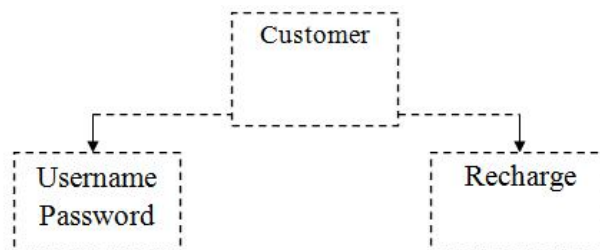


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

D. Amount Recharge


- 1) We can either amount to any customer or update existing customer with the amount.
- 2) The payments can be done in real time and checked for the confirmation.

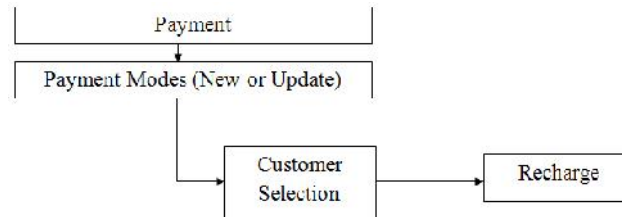

E. Use Case Diagram

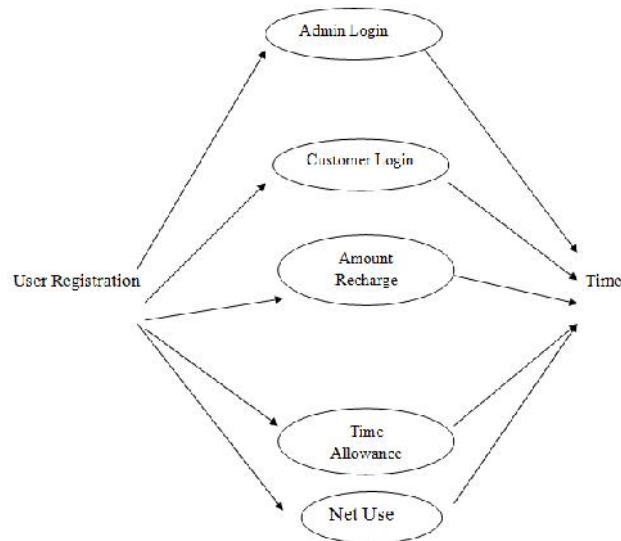


F. Sequence Diagram

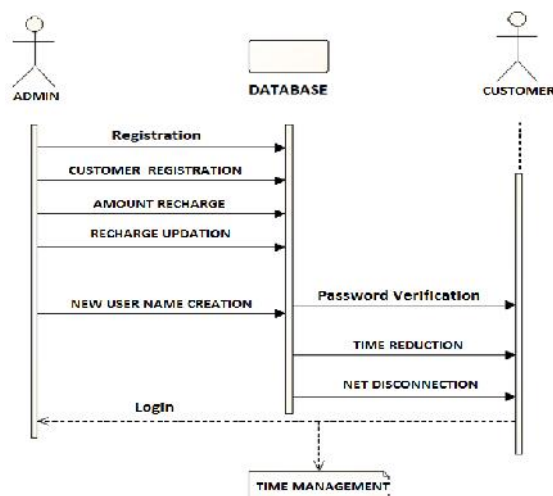


International Journal for Research in Applied Science & Engineering Technology (IJRASET)

G. Class diagram

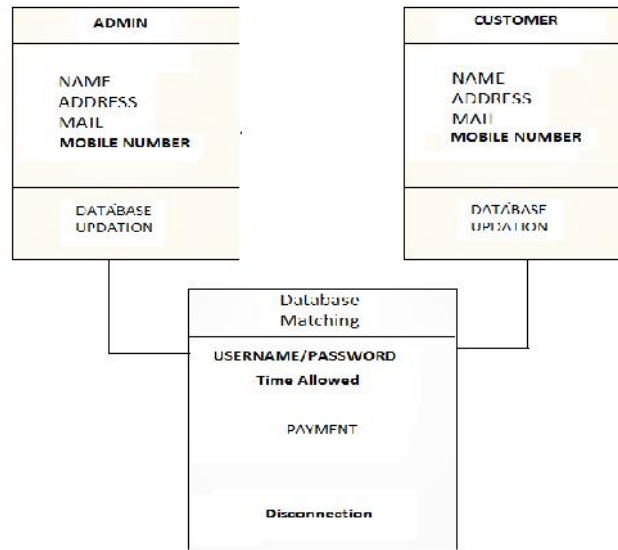

V. SIMULATION SCREENSHOTS

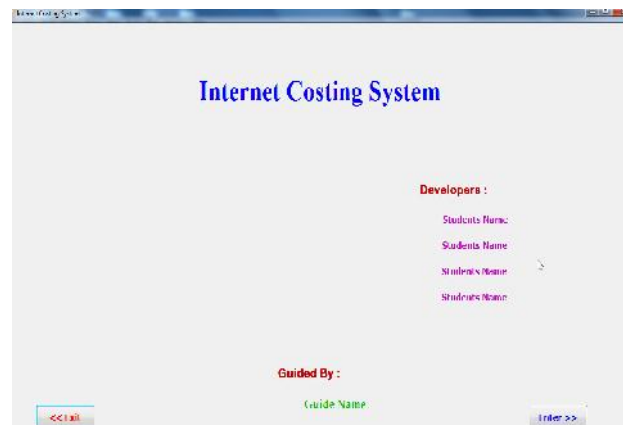

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Login

User Login



User Name

Password

<< Back Login

New User Creation

Customer ID
Customer Name
Place
Mobile No
E-Mail ID
User Name
Password
Confirm Password

Recharge Amount
Pay

Add New

Delete Save

<< Back

New User Creation

Customer ID
Customer Name
Place
Mobile No
E-Mail ID
User Name
Password
Confirm Password

Recharge Amount
Pay

Add New

Delete Save

<< Back

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The figure displays three screenshots of a web application interface, likely for a prepaid service provider.

Top Screenshot: New User Creation

This screen shows a form for creating a new user. The form includes fields for Customer ID (1002), Customer Name (ramam), Place (jddh), Mobile No (989080809), E Mail ID (123@xyz.com), User Name (aaa), Password (***), and Confirm Password (***). There is a Recharge Amount field set to 10. A "Pay" button is visible. A modal dialog box is open, displaying "Payment Amount Updated for the Customer Account" with an "OK" button. Below the form are "Delete", "Add New", and "Save" buttons. A "<< Back" button is at the bottom left.


Middle Screenshot: User Login

This screen shows the login interface. It features a 3D character holding a red bag and keys on the left. The login form has fields for User Name (aaa) and Password (***). There are "<< Back" and "Login" buttons.

Bottom Screenshot: Customer's Internet Usage

This screenshot shows the user's account status and usage. The header displays "Available Amount 69.63", "Remaining Time 03 : 29", "7:34:27 PM", "1002 ramam", "Usage Amount 0.078", "Balance Amount 69.552", and "00:00:14". A "<< Log Out" button is present. Below the header is a search bar with "Google India" and "Google Search" / "I'm Feeling Lucky" buttons. There is also a "Make Google my homepage" link and a "Google.co.in offered in:" section with links to various languages.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

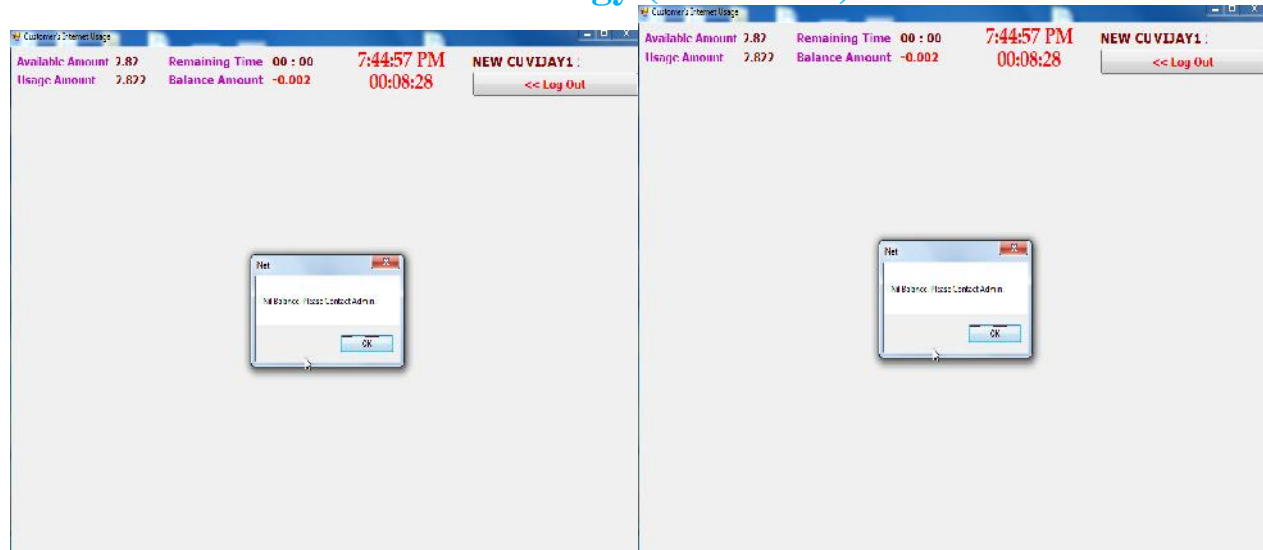

VI. CODING DESIGN

```
<Global.Microsoft.VisualBasic.CompilerServices.DesignerGenerated()> _
```

Partial Class Customer

Inherits System.Windows.Forms.Form

'Form overrides dispose to clean up the component list.

```
<System.Diagnostics.DebuggerNonUserCode()> _
```

Protected Overrides Sub Dispose(ByVal disposing As Boolean)

Try

If disposing AndAlso components IsNot Nothing Then

components.Dispose()

End If

Finally

MyBase.Dispose(disposing)

End Try

End Sub

'Required by the Windows Form Designer

Private components As System.ComponentModel.IContainer

'NOTE: The following procedure is required by the Windows Form Designer

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

'It can be modified using the Windows Form Designer.

'Do not modify it using the code editor.

<System.Diagnostics.DebuggerStepThrough(> _

Private Sub InitializeComponent()

Me.components = New System.ComponentModel.Container()

Me.TmrSecs = New System.Windows.Forms.Timer(Me.components)

Me.Panel1 = New System.Windows.Forms.Panel()

Me.lblCustomerID = New System.Windows.Forms.Label()

Me.lblCustomer = New System.Windows.Forms.Label()

Me.btnLogout = New System.Windows.Forms.Button()

Me.lblTime = New System.Windows.Forms.Label()

Me.lblTimeTaken = New System.Windows.Forms.Label()

Me.lblBalanceAmt = New System.Windows.Forms.Label()

Me.Label11 = New System.Windows.Forms.Label()

Me.lblUsageAmt = New System.Windows.Forms.Label()

Me.Label4 = New System.Windows.Forms.Label()

Me.lblAmount = New System.Windows.Forms.Label()

Me.Label2 = New System.Windows.Forms.Label()

Me.wbIE = New System.Windows.Forms.WebBrowser()

Me.Panel1.SuspendLayout()

Me.SuspendLayout()

,

'TmrSecs

,

Me.TmrSecs.Enabled = True

Me.TmrSecs.Interval = 1000

,

'Panel1

,

Me.Panel1.Controls.Add(Me.lblBalanceAmt)

Me.Panel1.Controls.Add(Me.Label11)

Me.Panel1.Controls.Add(Me.lblUsageAmt)

Me.Panel1.Controls.Add(Me.Label4)

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

```
Me.Panel1.Controls.Add(Me.lblAmount)
Me.Panel1.Controls.Add(Me.Label2)
Me.Panel1.Controls.Add(Me.lblTimeTaken)
Me.Panel1.Controls.Add(Me.lblTime)
Me.Panel1.Controls.Add(Me.btnLogout)
Me.Panel1.Controls.Add(Me.lblCustomer)
Me.Panel1.Controls.Add(Me.lblCustomerID)
Me.Panel1.Dock = System.Windows.Forms.DockStyle.Top
Me.Panel1.Location = New System.Drawing.Point(0, 0)
Me.Panel1.Name = "Panel1"
Me.Panel1.Size = New System.Drawing.Size(1028, 71)
Me.Panel1.TabIndex = 134
'
'
'lblCustomerID
'
Me.lblCustomerID.AutoSize = True
Me.lblCustomerID.Font = New System.Drawing.Font("Verdana", 14.25!, System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point, CType(0, Byte))
Me.lblCustomerID.ForeColor = System.Drawing.Color.Maroon
Me.lblCustomerID.Location = New System.Drawing.Point(749, 7)
Me.lblCustomerID.Name = "lblCustomerID"
Me.lblCustomerID.Size = New System.Drawing.Size(91, 23)
Me.lblCustomerID.TabIndex = 134
Me.lblCustomerID.Text = "Cust ID"
'
'lblCustomer
'
Me.lblCustomer.AutoSize = True
Me.lblCustomer.Font = New System.Drawing.Font("Verdana", 14.25!, System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point, CType(0, Byte))
Me.lblCustomer.ForeColor = System.Drawing.Color.Maroon
Me.lblCustomer.Location = New System.Drawing.Point(836, 7)
Me.lblCustomer.Name = "lblCustomer"
```

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

```
Me.lblCustomer.Size = New System.Drawing.Size(189, 23)

Me.lblCustomer.TabIndex = 135

Me.lblCustomer.Text = "Customer Name "

'

'btnLogout

'

Me.btnLogout.Font = New System.Drawing.Font("Verdana", 12.0!, System.Drawing.FontStyle.Bold, System.Drawing.GraphicsUnit.Point, CType(0, Byte))

Me.btnLogout.ForeColor = System.Drawing.Color.Red

Me.btnLogout.Location = New System.Drawing.Point(753, 33)

Me.btnLogout.Name = "btnLogout"

Me.btnLogout.Size = New System.Drawing.Size(272, 34)

Me.btnLogout.TabIndex = 136

Me.btnLogout.Text = "<< &Log Out"

Me.btnLogout.UseVisualStyleBackColor = True

'
```

VII. CONCLUSION

Thus I developed the project which is intended to create a time based scheduling system for net use. The time based scheduling allows the customer to use net services for the purchased time with great speed. The same user can use the net for the duration he purchases. It is equally useful to the service provider as they don't need to provide any slow net connection even when the customer's data plan is over.

VIII. ACKNOWLEDGMENTS

I thank our HOD P.Kanimozhi, Ph.D (Department of Computer Science and Engineering) to help us for creating this paper with his sincere guidance and Technical Expertise in the field of communication. The help of our guide Ms. J.Nulynpunitha, M.Tech, Department of CSE, IFET College of Engineering is really immense and once again I thank her for her great motivation. I thank IFET College of Engineering to provide me such a standard educational environment so that I am able to understand the minute concepts in the field of Engineering.

REFERENCES

- [1] R. Agrawal, J. Kiernan, R. Srikant, and Y. Xu, "Order Preserving Encryption for Numeric Data," Proc. ACM SIGMOD Int'l Conf. Management of Data (SIGMOD), 2004.
- [2] M. Armbrust, A. Fox, R. Griffith, A.D. Joseph, R.K. Andy Konwinski, G. Lee, D. Patterson, A. Rabkin, I. Stoica, and M. Zaharia, "Above the Clouds: A Berkeley View of Cloud Computing," technical report, Univ. of Berkeley, 2009.
- [3] J. Bau and J.C. Mitchell, "Security Modeling and Analysis," IEEE Security and Privacy, vol. 9, no. 3, pp. 18-25, May/June 2011.
- [4] S. Boyd and L. Vandenberghe, Convex Optimization. Cambridge Univ. Press, 2004.
- [5] N. Cao, C. Wang, M. Li, K. Ren, and W. Lou, "Privacy-Preserving Multi-Keyword Ranked Search over Encrypted Cloud Data," Proc. IEEE INFOCOMM, 2011.
- [6] K. Chen, R. Kavuluru, and S. Guo, "RASP: Efficient Multidimensional Range Query on Attack-Resilient Encrypted Databases," Proc. ACM Conf. Data and Application Security and Privacy, pp. 249-260, 2011.
- [7] K. Chen and L. Liu, "Geometric Data Perturbation for Outsourced Data Mining," Knowledge and Information Systems, vol. 29, pp. 657-695, 2011.
- [8] K. Chen, L. Liu, and G. Sun, "Towards Attack-Resilient Geometric Data Perturbation," Proc. SIAM Int'l Conf. Data Mining, 2007.
- [9] B. Chor, E. Kushilevitz, O. Goldreich, and M. Sudan, "Private Information Retrieval," ACM Computer Survey, vol. 45, no. 6, pp. 965-981, 1998.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

- [10] R. Curtmola, J. Garay, S. Kamara, and R. Ostrovsky, "Searchable Symmetric Encryption: Improved Definitions and Efficient Constructions," Proc. 13th ACM Conf. Computer and Comm. Security, pp. 79-88, 2006.
- [11] N.R. Draper and H. Smith, Applied Regression Analysis. Wiley, 1998.
- [12] H. Hacigumus, B. Iyer, C. Li, and S. Mehrotra, "Executing SQL over Encrypted Data in the Database-Service-Provider Model," Proc. ACM SIGMOD Int'l Conf. Management of Data (SIGMOD), 2002.
- [13] T. Hastie, R. Tibshirani, and J. Friedman, The Elements of Statistical Learning. Springer-Verlag, 2001.
- [14] B. Hore, S. Mehrotra, and G. Tsudik, "A Privacy-Preserving Index for Range Queries," Proc. Very Large Databases Conf. (VLDB), 2004.
- [15] Z. Huang, W. Du, and B. Chen, "Deriving Private Information from Randomized Data," Proc. ACM SIGMOD Int'l Conf. Management of Data (SIGMOD), 2005.
- [16] A. Hyvarinen, J. Karhunen, and E. Oja, Independent Component Analysis. Wiley, 2001.
- [17] I.T. Jolliffe, Principal Component Analysis. Springer, 1986.
- [18] F. Li, M. Hadjieleftheriou, G. Kollios, and L. Reyzin, "Dynamic Authenticated Index Structures for Outsourced Databases," Proc. ACM SIGMOD Int'l Conf. Management of Data (SIGMOD), 2006.
- [19] K. Liu, C. Giannella, and H. Kargupta, "An Attacker's View of Distance Preserving Maps for Privacy Preserving Data Mining," Proc. 10th European Conf. Principle and Practice of Knowledge Discovery in Databases (PKDD), 2006.
- [20] M.L. Liu, G. Ghinita, C.S. Jensen, and P. Kalnis, "Enabling Search Services on Outsourced Private Spatial Data," The Int'l J. Very Large Data Base, vol. 19, no. 3, pp. 363-384, 2010.



G.Vijaymurali received diploma from "Sri Vengatachalapathy Polytechnic College, Villupuram" in 2010. Currently he pursues his B.E from IFET College of Engineering from Department of Computer Science Engineering. His area of expertise is Java Technology ,CSS, JavaScript ,HTML,XML,C and C++.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)