iJRASET
International Journal For Research in Applied Science and Engineering Technology

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 9 **Issue:** VI **Month of publication:** June 2021

DOI: https://doi.org/10.22214/ijraset.2021.34983

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 7.429
Volume 9 Issue VI Jun 2021- Available at www.ijraset.com

Audio Sentiment Analysis

Yash Sharma[1], Prof. Richa Sharma[2], Shreya Srivastava[3], Shambhavi Srivastava[4], Sharique Ansari[5]
[1, 2, 3, 4, 5]*Department Of Information Technology, Babu Banarasi Das Institute Of Technology & Management, Lucknow*

Abstract: ***This paper proposed another Audio notion investigation utilizing programmed discourse acknowledgment is an arising research territory where assessment or opinion showed by a speaker is identified from regular sound. It is moderately under-investigated when contrasted with text-based notion identification. Separating speaker estimation from common sound sources is a difficult issue. Nonexclusive techniques for feeling extraction by and large use records from a discourse acknowledgment framework, and interaction the record utilizing text-based estimation classifiers. In this examination, we show that this standard framework is imperfect for sound assessment extraction. Then again, new engineering utilizing watchword spotting (UWS) is proposed for assumption discovery. In the new engineering, a book-based assessment classifier is used to naturally decide the most helpful and discriminative feeling bearing watchword terms, which are then utilized as a term list for UWS. To get a minimal yet discriminative assumption term list, iterative element enhancement for most maximum entropy estimation model is proposed to diminish model intricacy while keeping up powerful grouping precision. The proposed arrangement is assessed on sound acquired from recordings in youtube.com and UT-Opinion corpus. Our exploratory outcomes show that the proposed UWS based framework fundamentally outflanks the conventional engineering in distinguishing assumption for testing reasonable undertakings.***

Keyword: utilizing watchword spotting (UWS), framework, maximum entropy, feeling extraction

I. INTRODUCTION

Presently the Text based slant recognition is a set up field in characteristic language handling (NLP). Slant examination/assessment mining, investigates individuals' suppositions, opinions, assessments, evaluations, perspectives, and feelings towards elements like items, administrations, associations, people, issues, occasions, subjects, and their characteristics. There is a colossal measure of stubborn information in the online media and on the Web as Twitter, Facebook, message sheets, web journals, and client gatherings. The dynamic cycle of individuals is influenced by the feelings framed by a wide scope of thoroughly considered pioneers and customary individuals the web. Amazon, Yahoo, Google and different other customized sites are a critical asset for getting assessments concerning results of any sort. Numerous buyers structure their choice to purchase an item reliant upon input from online audits. This data assists standard with peopling decides, yet in addition gives pointers to organizations about the gathering of an item, or a political setting, to comprehend the mind-set of individuals in regards to a continuous social/social/political/financial issue. Ordinarily, a given book is characterized to display positive, negative or unbiased. This type of programmed grouping has various applications like estimating general assessment/feeling utilizing Twitter channel, dissecting on the web item surveys; comprehend mass social human conduct over a theme, item or an occasion. Text based audits structure just one of the numerous ways individuals can communicate their assumption/assessment on items or social issues. Sound/Video is additionally an unmistakable strategy to communicate assessments. A great many recordings on YouTube are about items and film surveys, item un-boxing, political, social issue investigation and conclusions on them. There are numerous sound stages on the Internet where people express their suppositions. Likewise, the sound mode is more impressive than text for some circumstances since they give more extravagant signals of the speaker with respect to their feelings. This huge asset is undiscovered and separating slant/assessment of society about explicit items or mass assessment with respect to social or political circumstances will be extremely helpful for data examination. Identifying feeling in sound is as yet a neglected region. Discourse based estimation extraction is an arising and testing field. In this investigation, vigorous strategies are introduced to separate estimation/assessment from characteristic sound sources. A crossover framework is created which uses a vigorous Automatic Speech Recognition (ASR) framework couple with NLP based notion investigation procedures to recognize supposition of sound streams. Dissimilar to message-based sources, sound sources have a serious level of fluctuation both as far as communicating assessment just as the method of articulation of the assessment. There are a scope of difficulties for estimation extraction in exceptionally regular discourse sources including: 1) Domain and jargon: The speaker can communicate sentiments about any point, (e.g., items, motion pictures, governmental issues, social issues, games, and so on) Hence the ASR framework ought to be proficient to deal with a wide scope of spaces and jargon. The language model ought to be thorough. 2) Speaker fluctuation and speaker highlights: ASR framework ought to be powerful to speaker changeability which incorporates a wide scope of English intonations from everywhere

©IJRASET: All Rights are Reserved

the world. 3) Noisy sound and channels: Inconsistent chronicle gear and distinctive mode/distance of recording, conflicting acoustic and foundation climate conditions make the assessment identification issue testing. Additionally, ambient sound/talk, deliberate music blending, resonation issues make the issue harder. 4) Natural and Spontaneous: Detecting sound conclusion in characteristic and unconstrained speaker settings and different speaker intuitive situations (i.e., 1-way, 2-way, public discourse and so forth) is testing. Given the hazardous increment of online recordings on item surveys, un-boxing, legislative issues, sports, culture, and so forth on sites, for example, YouTube.com, Vimeo, News broadcasting, Daily Motion, Twitch and Vine, programmed sound slant identification innovation would be helpful in gathering and summing up data for clients.

II. LITERATURE SURVEY

This segment gives subtleties of writing review identified with the proposed idea. Conclusion investigation can be arranged principally into the accompanying four classes,

1) *Document-level Assessment Examination:* The conclusion is created on the general report/survey level. This is a worldwide investigation. References include: [45], [42], [39], [46];
2) *Sentence-level Conclusion Investigation:* This gives a microlevel assumption appraisal for each sentence. This is adequately a nearby examination. References include: [47], [48], [49]
3) *Aspect-Based Assumption Examination:* This gives a slant variety in both a nearby and worldwide level. Angle put together notion examination centres with respect to the acknowledgment of all assumption articulations inside a given record, and the perspectives/objects to which they allude [41], [51]. It is feasible to have differing nearby assumption with one generally speaking report evaluated esteem.
4) *Comparative Assumption Examination:* Extracting assessment in audits where an item is contrasted and another item [60] (e.g., Google search is superior to Yahoo).

The initial phase being developed is to pre-measure text utilizing semantic devices, for example, stemming, tokenization, grammatical features labelling, element extraction, and connection extraction relying upon order procedure [63], [51], [14]. When we have the highlights created, next comes characterization. There are two principal ways to deal with report level estimation examination: directed learning and unaided learning. The regulated methodology accepts there is a limited arrangement of classes into which the report ought to be characterized, and preparing information exists for each class including positive and negative, with impartial being a choice (i.e., a 2-class or 3-class framework). Utilizing different managed techniques, for example, Maximum Entropy [21], SVM [40], Naive Bayes [40], Logistic Regression, or KNN, highlights can be figured out how to arrange the estimation showed. There are likewise unaided ways to deal with archive level conclusion examination utilizing semantic direction of explicit expressions inside the report. Most techniques utilize managed ways to deal with characterize the sentences into the two classes. The above procedures are utilized for archive level order. There are new strategies utilizing Neural Networks [52], [54] and Recursive Neural Tensor Network (RNTN) [49] which break down slant at the sentence level. Of every one of these strategies, we utilize the ME based record level notion identification technique in this examination.

III. PROJECT SCOPE

In this examination, we show that this pattern framework is problematic for sound conclusion extraction. Then again, new design utilizing watchword spotting (UWS) is proposed for supposition identification. In the new engineering, a book-based assumption classifier is used to consequently decide the most helpful and discriminative slant bearing catchphrase terms, which are then utilized as a term list for KWS. To get a smaller yet discriminative conclusion term list, iterative component advancement for greatest entropy estimation model is proposed to diminish model intricacy while keeping up successful arrangement exactness.

IV. PROBLEM STATEMENT

Audio sentiment analysis using automatic speech recognition is an emerging research area where opinion or sentiment exhibited by a speaker is detected from natural audio. It is relatively under-explored when compared to text-based sentiment detection. Extracting speaker sentiment from natural audio sources is a challenging problem.

©IJRASET: All Rights are Reserved

V. PROJECT ANALYSIS

Initial one is the disconnected content-based supposition model age, the second is the ASR based aware identification framework shaping our standard framework, lastly the third is a proposed framework utilizing sound Keyword Spotting (UWS) approach.

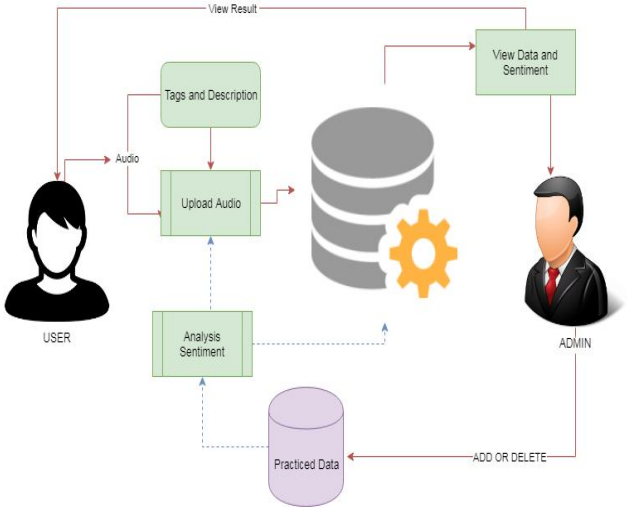

Figure 1. Architecture diagram

Each square is clarified in detail in resulting segments. In all actuality, precise estimation discovery for the most part depends on a little part of the discourse acknowledgment record, since notion bearing jargon will in general be meagre in spoken suppositions. As such, assessment discovery exactness relies upon having the option to dependably distinguish and perceive a much-engaged jargon in the expressed remark sound stream. Subsequently, watchword spotting (UWS) innovation is required to be more qualified for notion recognition, rather than full-record ASR.

VI. MODULE DESCRIPTION

A. Audio Sentiment On Upload

Upload the audio with tags and description. Based on the description of the audio, we can sense that details as positive or negative. Based on the sentiment of description, we can analysis the sentiment of audio. This will detect the sentiment audio. Audio's sentiment can be analysed while admin or user uploading the audios with the tags and descriptions.

B. User Reviews And Ratings

User can give rating and review to the audio. And user can upload comments for user side. Admin view all user ratings and comments. Comments are analysed whether it is positive or negative. Based on the review analysis this can be rate. Admin have the rights to remove the review completely from the database.

C. Graph Analysis

The Details of ratings and review and analysed sentiment can be view as a chart for the convenience of analyser to understand the details in proper manner. The chart in this system is plot as Column Chart, Pie Chart and Spline Chart. The charts shown in the both user and admin side as well.

VII. MAXIMUM ENTROPY TEXT SENTIMENT DETECTION

The rule of maximum entropy expresses that the likelihood circulation which best addresses the present status of information is the one with biggest entropy, with regards to definitely expressed earlier information, (for example, a recommendation that communicates testable data). Another method of expressing this: Take unequivocally expressed earlier information or testable data about a likelihood conveyance work. Consider the arrangement of all preliminary likelihood dispersions that would encode the earlier information. As per this rule, the dispersion with maximal data entropy is the most ideal decision. Most extreme entropy classifier as the name propose is identified with greatest entropy. It is a classifier which inclines toward the consistency or greatest entropy if no information is noticed. In any case, as it sees the information, it needs to move away from the most extreme entropy by clarifying information. After it has clarified the information, it again attempts to expand the entropy on whatever leftover isn't seen.

©IJRASET: All Rights are Reserved

A. A greatest entropy classifier gets going making minimal suspicion as far as assurance about the fundamental information dissemination as outlined in the three situations beneath

B. If we are attempting to decide whether a coin is reasonable, we could get going accepting it is reasonable, that is the two heads and tails are similarly likely and re-examine our assessment as we perform more analyses. Same with a dice - we could get going accepting each of the six results are similarly likely as demonstrated in figure underneath and afterward re-examine the presumption as we accumulate more information

C. If we are attempting to discover the dispersion of statures of understudies in a school, and we have some earlier information on the spread of statures, at that point we can get going expecting the statures are appropriated like a ringer shape as demonstrated in figure beneath (it would be too moderate to even consider accepting all statures are same - chime shape is an ideal beginning)

D. Lastly, in the event that we are assessing the pace of radioactive rot of some component we have, and we have earlier information on the normal pace of rot (all certain qualities for results), we can get going accepting a rot rate appropriation like the one in figure underneath.

E. The key takeaway is in each of the three of the above cases, our beginning suppositions are the ideal moderate presumptions as far as vulnerability to begin. That is each of the three figures, explicit to the three use cases, are the ideal most elevated vulnerability start focuses. Our vulnerability can possibly diminish, if by any stretch of the imagination, as we lead more examinations to overhaul our convictions - our vulnerability won't surpass these upper limits

VIII. RESULT

In this research paper, investigates text and sound based notion location are introduced. In this examination, we show the exactness of the naturally created include set created in the content assessment corpus depicted the consequently produced highlight set in contrasted with a carefully assembled rundown of estimation highlights created by scientists for the reasons for text conclusion location [59]. The hand tailored list of capabilities has been well known and utilized for building numerous content-based slant identification frameworks [28], [33], [34]. In the main sound investigation, we attempt to decide the best watchword list for sound-based supposition location. By utilizing all watchword records removed utilizing the technique depicted we assess supposition identification exactness for both YouTube and UT-Opinion datasets against every catchphrase list. It shows the effect of picking bigger estimated watchword sets to improve the general framework exactness. The goal is to show the soaking conduct of exactness as we pick an ever-increasing number of watchwords. It is seen that precision for both YouTube and UT-Opinion first increments as we increment the watchword list size from 200 to 32K. After 32K, the exactness appears to even out off before in the end diminishing. Since the littlest catchphrase records have the best assessment bearing highlights, the exactness at first ascents rapidly. As the catchphrase size develops, the new watchwords are generally less powerful, and subsequently precision doesn't ascend as quickly. In UWS frameworks, it is ordinarily perceived that expanding the size of the watchword rundown can possibly build the quantity of bogus alerts (i.e., the framework erroneously identifies a catchphrase that isn't really present in the sound). At the end of the day, greater records can be less precise prompting high bogus cautions, it creates the impression that erroneously identified highlights (because of blunders in UWS) in the greatest catchphrase records overpower the framework bringing about a deficiency of exactness. It is conceivable that a high number of bogus alerts contribute towards this result. Since the 48K catchphrase set gives the best exhibition, we pick this watchword set for every single leftover analysis.

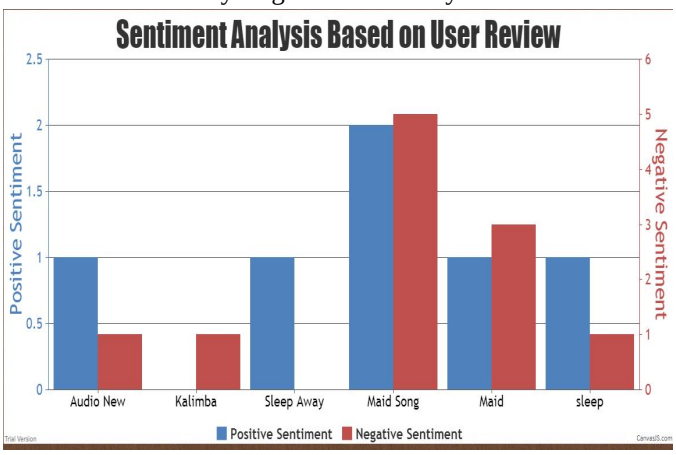

Figure 2. Sentiment analysis based on user review

©IJRASET: All Rights are Reserved

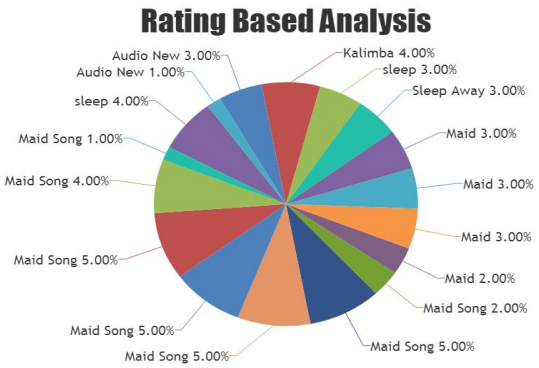

Figure 3. Rating based analysis

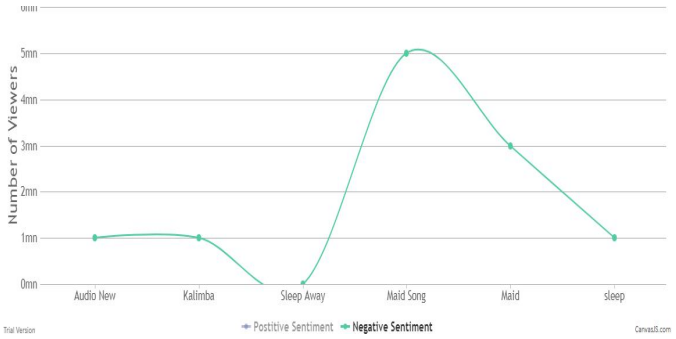

Figure 4

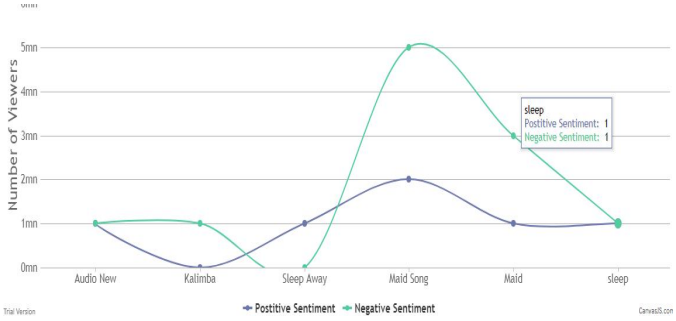

Figure 5

IX. CONCLUSION

In this research paper, proposed a technique for perceiving notion in sound has been proposed. The investigation shows that general notion (both in sound and text) is represented by couple of estimations bearing terms. To abuse this reality, another technique that utilizations Keyword Spotting (KWS) to look for conclusion bearing terms in sound has been proposed. By zeroing in on the standing that sway choice and disregarding non-assumption bearing words/expresses, the general framework is more resistant to discourse acknowledgment mistakes. Moreover, another strategy to make the conclusion bearing catchphrase list for KWS has likewise been proposed. The technique utilizes an iterative procedure to consequently remove supposition bearing watchwords from text. Utilizing this strategy, we can construct more functional frameworks that use equivalent to or under 48K catchphrases. Furthermore, another strategy for estimation scoring that joins catchphrase spotting probability (or certainty) into Maximum Entropy probability calculation has likewise been proposed. Moreover, another corpus for sound notion assessment has been gathered and introduced in this investigation. The new corpus is called UT Opinion and apparently, is one of its sorts for sound-based assumption recognition. At last, we have introduced the assessment of the proposed framework on YouTube and UT-Opinion corpora. The new strategy has been contrasted with a pattern framework that utilizations crude records from ASR and feeds it to message-based conclusion classifier. Our exploratory outcomes show that the new strategy beats the pattern framework by lessening the blunder rate by 19% relative in YouTube, and 8% relative in UT-Opinion.

©IJRASET: All Rights are Reserved

While the new technique develops sound based assessment identification, there is space for additional improvement. For instance, tending to the conventional power issues of ASR (emphasize, clamour, and so on) can have critical effect of execution. Another space of work could zero in on utilizing unadulterated discourse highlights to expand lexical data attracted for discourse acknowledgment to do discourse slant location.

REFERENCES

[1] S. Johnson, "Internet changes everything: Revolutionizing public participation and access to government information through the Internet", Administrative Law Review, Vol. 50, No. 2 (Spring 1998), pp. 277-337
[2] D. Chrysanthos. "Strategic manipulation of internet opinion forums: Implications for consumers and firms." Management Science 52.10 (2006): 1577-1593.
[3] M. Wollmer, et al. "Youtube movie reviews: Sentiment analysis in an audio-visual context." Intelligent Systems, IEEE (2013): pages 46-53.
[4] J. Naughton, "The internet: is it changing the way we think?", The Gaurdian, Saturday 14 August 2010
[5] G. Mishne and N. S. Glance, "Predicting movie sales from blogger sentiment," in AAAI 2006 Spring Symposium on Computational Approaches to Analyzing Weblogs, 2006.
[6] L. Barbosa, and J. Feng, "Robust sentiment detection on twitter from biased and noisy data.", in Proceedings of the International Conference on Computational Linguistics (COLING-2010). 2010.
[7] E. Cambria, N. Howard, Y. Xia, and T. S. Chua, "Computational Intelligence for Big Social Data Analysis", IEEE Computational Intelligence Magazine, 11(3), 8-9, 2016.
[8] E. Cambria, B. Schuller, Y. Xia, and B. White, "New avenues in knowledge bases for natural language processing", Knowledge-Based Systems, 108(C), 1-4, 2016.
[9] M. Bautin, L. Vijayarenu, and S. Skiena. "International sentiment analysis for news and blogs.", in Proceedings of the International AAAI Conference on Weblogs and Social Media (ICWSM-2008). 2008.
[10] I. Becker and V. Aharonson. "Last but definitely not least: on the role of the last sentence in automatic polarity-classification.", in Proceedings of the ACL 2010 Conference Short Papers. 2010.
[11] Z. Zhai, B. Liu, H. Xu and P. Jia. "Clustering Product Features for Opinion Mining." Proceedings of Fourth ACM International Conference on Web Search and Data Mining (WSDM-2011), Feb. 9-12, 2011, Hong Kong, China.
[12] L. Kaushik, A. Sangwan, and J. H. L. Hansen. "Sentiment extraction from natural audio streams." In Acoustics, Speech and Signal Processing (ICASSP), 2013 IEEE International Conference on, pp. 8485-8489. IEEE, 2013.
[13] L. Kaushik, A. Sangwan, and J. H. L. Hansen. "Automatic sentiment extraction from YouTube videos." In Automatic Speech Recognition and Understanding (ASRU), 2013 IEEE Workshop on, pp. 239-244. IEEE, 2013.
[14] B. Pang and L. Lee. 2005. "Seeing stars: exploiting class relationships for sentiment categorization with respect to rating scales." In ACL, pages 115-124, 2005
[15] E. Kouloumpis, T. Wilson, and J. Moore. "Twitter sentiment analysis: The good the bad and the omg!" ICWSM 11 (2011): 538-541.
[16] A. Bifet, and E. Frank. "Sentiment knowledge discovery in twitter streaming data." In Discovery Science, pp. 1-15. Springer Berlin Heidelberg, 2010.
[17] H. Saif, Y. He, and H. Alani. "Semantic sentiment analysis of twitter." In the Semantic WebISWC 2012, pp. 508-524. Springer Berlin Heidelberg, 2012.
[18] A. Go, L. Huang, and R. Bhayani. "Twitter sentiment analysis." Entropy 17 (2009).
[19] A. Berger, D. Pietra, and D. Pietra, "A Maximum Entropy Approach to Natural Language Processing.", Computational Linguistics
[20] X. Fei, H. Wang, J. Zhu, "Sentiment word identification using the maximum entropy model," Natural Language Processing and Knowledge Engineering (NLP-KE), 2010 International Conference on, vol., no., pp.1,4, 21-23 Aug. 2010
[21] A. Ratnaparkhi, "A simple introduction to maximum entropy models for natural language processing.", IRCS Technical Reports Series (1997).
[22] C. Lin, and Y. He, "Joint sentiment/topic model for sentiment analysis.", 2009, Proceedings of the ACM International Conference on Information and Knowledge Management.
[23] B. Liu, "Sentiment Analysis and Opinion Mining.", 2012, Morgan & Claypool publishers
[24] Q. Mei, X. Ling, M. Wondra, H. Su and C. Zhai. "Topic sentiment mixture: modeling facets and opinions in weblogs." 2007, Proceedings of International Conference on World Wide Web.
[25] Y. Lu, and C. Zhai, "Opinion integration through semi-supervised topic modeling." Proceedings of International Conference on World Wide Web, 2008.
[26] S. Moghaddam, and E. Martin, "ILDA: interdependent LDA model for learning latent aspects and their ratings from online product reviews.", In Proceedings of the 34th international ACM SIGIR conference on Research and development in Information Retrieval, pp. 665-674. ACM, 2011.
[27] A. Mukherjee and B. Liu, "Mining contentions from discussions and debates.", In Proceedings of the 18th ACM SIGKDD international conference on Knowledge discovery and data mining (KDD '12). ACM, New York, NY, USA, 841-849, 2012.
[28] M. Hu, and B. Liu. "Mining and summarizing customer reviews." In Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining, pp. 168-177. ACM, 2004.
[29] W. Zhao, J. Jing, Y. Hongfei, and L. Xiaoming, "Jointly modeling aspects and opinions with a MaxEnt-LDA hybrid.", In Proceedings of the 2010 Conference on Empirical Methods in Natural Language Processing, pp. 56-65. Association for Computational Linguistics, 2010.
[30] B. Pang, and L. Lillian, "Opinion mining and sentiment analysis." Foundations and trends in information retrieval 2.1-2 (2008): 1-135.
[31] B. Snyder, and R. Barzilay, "Multiple Aspect Ranking Using the Good Grief Algorithm." In HLT-NAACL, pp. 300-307. 2007.
[32] M. Joshi, and C. Penstein-Ros, "Generalizing dependency features for opinion mining." Proceedings of the ACL-IJCNLP 2009 Conference Short Papers. Association for Computational Linguistics, 2009.
[33] X. Ding, B. Liu, and P. S. Yu. "A holistic lexicon-based approach to opinion mining." In Proceedings of the 2008 International Conference on Web Search and Data Mining, pp. 231-240. ACM, 2008.
[34] L. Qian, Z. Gao, B. Liu, and Y. Zhang. "Automated rule selection for aspect extraction in opinion mining." In International Joint Conference on Artificial Intelligence (IJCAI). 2015.

©IJRASET: All Rights are Reserved

[35] B. Pang and L. Lee, "A Sentimental Education: Sentiment Analysis Using Subjectivity Summarization Based on Minimum Cuts,", Proc. 42nd Ann. Meeting of the Assoc. for Computational Linguistics, Assoc. for Computational Linguistics, 2004, pp. 271278.
[36] E. Cambria and A. Hussain, "Sentic Computing: Techniques, Tools, and Applications", Springer, 2012.
[37] Witold Pedrycz, and Shyi-Ming Chen. "Sentiment Analysis and Ontology Engineering.", Springer, 2016
[38] V. Hatzivassiloglou, and K. R. McKeown. "Predicting the semantic orientation of adjectives." In Proceedings of the 35th annual meeting of the association for computational linguistics and eighth conference of the european chapter of the association for computational linguistics, pp. 174-181. Association for Computational Linguistics, 1997.
[39] B. Pang, L. Lee, and S. Vaithyanathan, Thumbs Up? Sentiment Classification Using Machine Learning Techniques, Proc. Ann. Conf. Empirical Methods in Natural Language Processing, Assoc. for Computational Linguistics, 2002, pp. 7986.
[40] X. Bai, "Predicting consumer sentiments from online text.", Decision Support Syst 2011;50:73242..
[41] A. Popescu, and E. Orena, "Extracting product features and opinions from reviews." In Natural language processing and text mining, pp. 9-28. Springer London, 2007.
[42] P. Turney, Thumbs Up or Thumbs Down? Semantic Orientation Applied to Unsupervised Classification of Reviews, Proc. 40th Ann. Assoc. for Computational Linguistics, Assoc. for Computational Linguistics, 2002, pp. 417424.
[43] J. Kamps et al., Using WordNet to Measure Semantic Orientation of Adjectives, Proc. 4th Ann. Intl. Conf. IS-28-02-Cambria.indd 20 6/5/13 11:05 AM March/April 2013 www.computer.org/intelligent 21 Language Resources and Evaluation, European Language Resources Assoc., 2004, pp. 11151118
[44] R. Feldman, "Techniques and applications for sentiment analysis." Communications of the ACM 56.4 (2013): 82-89.
[45] J. Brooke, M. Tofiloski, and M. Taboada. "Cross-Linguistic Sentiment Analysis: From English to Spanish." RANLP. 2009.
[46] X. Wan, "Using bilingual knowledge and ensemble techniques for unsupervised Chinese sentiment analysis." Proceedings of the conference on empirical methods in natural language processing. Association for Computational Linguistics, 2008.
[47] H. Yu, and V. Hatzivassiloglou. "Towards answering opinion questions: Separating facts from opinions and identifying the polarity of opinion sentences." Proceedings of the 2003 conference on Empirical methods in natural language processing. Association for Computational Linguistics, 2003.
[48] E. Riloff, and J. Wiebe. "Learning extraction patterns for subjective expressions." Proceedings of the 2003 conference on Empirical methods in natural language processing. Association for Computational Linguistics, 2003.
[49] R. Socher, et al. "Recursive deep models for semantic compositionality over a sentiment treebank." Proceedings of the conference on empirical methods in natural language processing (EMNLP). Vol. 1631. 2013.
[50] T. Wilson, J. Wiebe, and P. Hoffmann. "Recognizing contextual polarity in phrase-level sentiment analysis." In Proceedings of the conference on human language technology and empirical methods in natural language processing, pp. 347-354. Association for Computational Linguistics, 2005.
[51] X. Ding, B. Liu, and L. Zhang. "Entity discovery and assignment for opinion mining applications." In Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining, pp. 1125-1134. ACM, 2009.
[52] M. Ruiz, and P. Srinivasan. "Hierarchical neural networks for text categorization (poster abstract)." In Proceedings of the 22nd annual international ACM SIGIR conference on Research and development in information retrieval, pp. 281-282. ACM, 1999.
[53] L. Kaushik, A. Sangwan, and J. H. L. Hansen. "Automatic audio sentiment extraction using keyword spotting." In INTERSPEECH, pp. 2709-2713. 2015.
[54] N. H. Tou, G. Wei, L. Kok. "Feature selection, perceptron learning, and a usability case study for text categorization", ACM SIGIR conference; 1997
[55] www.cs.uic.edu/ liub/FBS/sentiment-analysis.html
[56] http://www.cs.uic.edu/ liub/FBS/opinion-lexicon-English.rar
[57] J. McAuley, C. Targett, Q. Shi, and A. D. Hengel. "Image-based recommendations on styles and substitutes." In Proceedings of the 38th International ACM SIGIR Conference on Research and Development in Information Retrieval, pp. 43-52. ACM, 2015.
[58] J. McAuley, R. Pandey, and J. Leskovec. "Inferring networks of substitutable and complementary products." In Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, pp. 785-794. ACM, 2015.
[59] M. Ganapathibhotla, B. Liu: Mining Opinions in Comparative Sentences. COLING, pages 241-248, 2008
[60] N. Jindal, B. Liu: Identifying comparative sentences in text documents. SIGIR, pages 244-251, 2006.
[61] Amazon reviews downloader and parser, http://esuli.it

©IJRASET: All Rights are Reserved

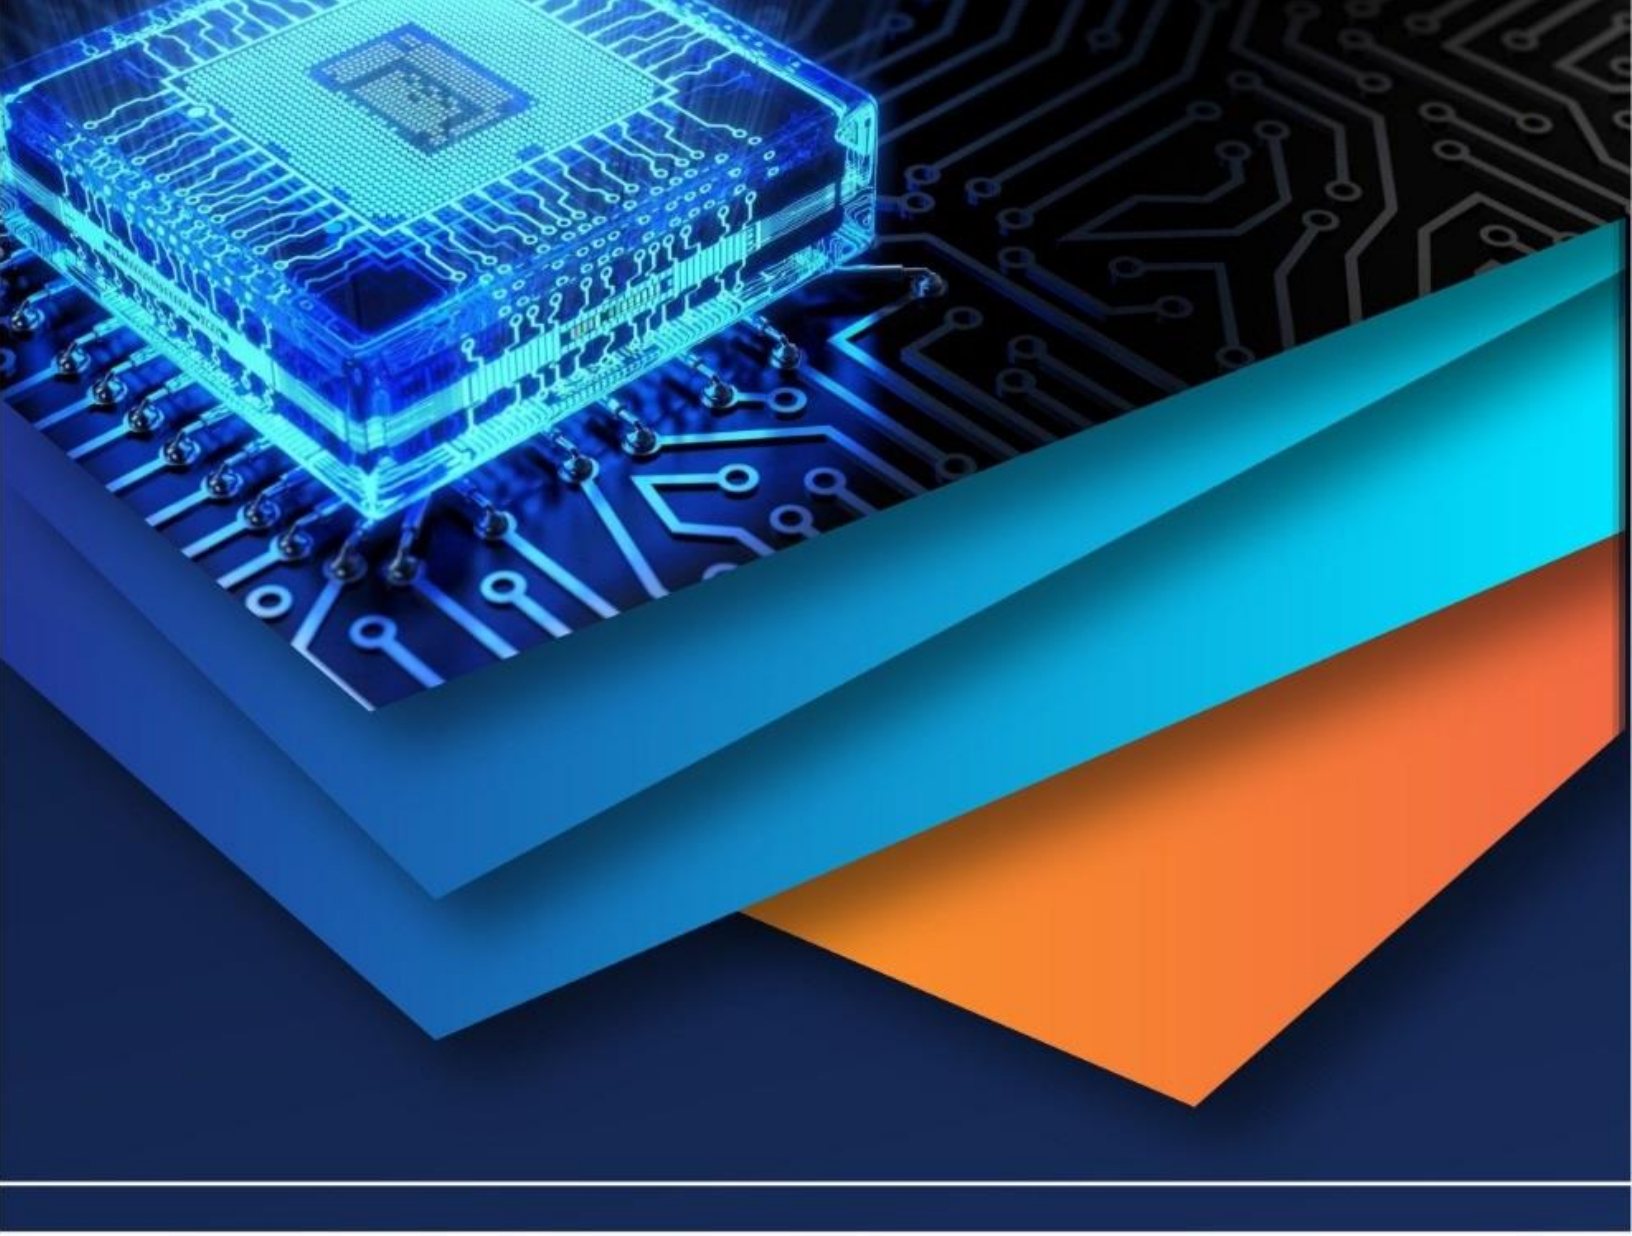

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)