



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 4 Issue: XII Month of publication: December 2016

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

**International Journal for Research in Applied Science & Engineering
Technology (IJRASET)**

Image Enhancement Using Recursive Adaptive Gamma Correction

Gurjeevan Kaur¹, Er. Jashanpreet Kaur²
Guru Kashi University, Talwandi Sabo

Abstract: The “Adaptive Approach for Historical or Degraded Document Binarization” is that in which Libraries and Museums obtain in large gathering of ancient historical documents printed or handwritten in native languages. Typically, only a small group of people are allowed access to such collection, as the preservation of the material is of great concern. In recent years, libraries have begun to digitize historical document that are of interest to a wide range of people, with the goal of preserving the content and making the documents available via electronic media. But for historical documents suffering from degradation due to damaged background, stained paper, holes and other factors, the recognition results drop appreciably. These recognition results can be improved using binarization technique. Binarization technique can differentiate text from background. The simplest way to get an image binarized is to choose a threshold value, and organize all pixels with values greater than this threshold as white, and every other pixels as black. The problem arises, how to select the correct threshold. The selection of threshold is performed by two methods: Global, Local. Our main focus is to effectively binarize the document images suffering from strain & smear, uneven background, holes & spot and various illumination effect by applying Adaptive Binarization Techniques. Our objectives is to Study various Traditional Binarization Techniques and to develop a hybrid binarization technique which will be more efficient than traditional techniques in term of noise suppression, text extraction and enhance the document to make it better for readability & automatic Document analysis. Result is analyzed and obtains which conclude that

Keyword: Global, Local, Binarization, illumination, hybrid Binarization, historical documents.

I. INTRODUCTION

Images are the most common and convenient means of conveying or transmitting information. An image is significance a thousand terms. Pictures in brief convey information on positions, sizes and inter-relationships among objects. They describe spatial information that we can recognize as objects. Human beings are superior at derive information from such images, because of our native visual and mental abilities. About 75% of the information received by human is in pictorial form.

The image enhancement is one of the significant techniques in digital image processing. It has an important role in many fields such as medical image analysis, remote sensing, high description television, hyper spectral image processing, microscopic imaging etc [21].

The contrast is the difference in visual properties that distinguish an object from other object and from the background. In other words, it is the difference between the darker and the lighter pixels of image. If the difference is large the image will have high contrast otherwise the image will have low contrast. The contrast enhancement increases the total contrast of an image by making light colors lighter and dark colors darker at the same time.

It does this by surroundings all color components below a specified lower bound to zero, and all color components above a particular upper bound to the maximum intensity i.e. 255. Color components between the upper and lower bounds are set to a linear ramp of values between 0 and 255. Because the upper bound must be larger than the lower bound, the lower bound must be between 0 and 254, and upper bound must be between 1 and 255. Enhanced image can also be described as if a curtain of fog has been removed from the image [19].

There are a number of reasons for an image to have poor disparity:

- A. The device used for imaging is of poor quality.
- B. Lack of expertise of the operator.
- C. The undesirable outside conditions at the time of acquisition.

International Journal for Research in Applied Science & Engineering Technology (IJRASET)



Original Image Enhanced Image
Figure 1: Image Enhancement

Image enhancement is among the simplest and most appealing areas of digital image processing. Fundamentally, the idea behind enhancement techniques is to bring out detail that is hidden, or simply to highlight certain features of interest in an image. An example of enhancement is shown in Figure in which when contrast is increased and filtering is done to remove the noise it looks better from input image.

II. CONTRAST ENHANCEMENT METHODS

Image enhancement methods based on redistributing the probability densities are indirect methods of contrast enhancement. In these methods, the image intensities can be redistributed within the dynamic range without defining a specific contrast term. Histogram modification techniques are most popular due to their easy and fast implementation [2]. In these methods histogram equalization (HE) is one of the most frequently used technique. The fundamental principle of Histogram equalization is to make the histogram of the enhanced image to have approximately uniform distribution so that the dynamic range of the image can be fully exploited. However the original HE always causes several problems:

- A. It lacks of adjustment mechanism to control the level of the enhancement and cannot make satisfying balance on the details between bright parts and dark parts.
- B. It may over enhance or generate excessive noise to the image in certain applications.
- C. It may sometimes dramatically change the average brightness of the image.

Various methods have been published to limit the level of contrast enhancement in Histogram Equalization (HE). Most of them are carried out through modifications on the HE. For example, in the Brightness preserving Bi- Histogram Equalization (BBHE) [26], two separate histograms from the same image are formed and then equalized independently, where the first one is the histogram of intensities that are less than the mean intensity and the second one is the histogram of intensities that are greater than the mean intensity. BBHE can reduce the mean brightness variation. In Dualistic Sub-image Histogram Equalization (DSIHE) [42], two separate histograms are created according to the median gray intensity instead of the mean intensity. Although DSIHE can maintain the brightness and entropy better, but both DSIHE and BBHE cannot adjust the level of enhancement and are not robust to noise. Consequently, several problems will emerge when there are spikes in the histogram. The Recursive Mean Separation Histogram Equalization (RMSHE) [12] enhances image by iterating BBHE. The mean intensity of the output image will converge to the average brightness of the original image when the iteration increases. Accordingly the brightness of the enhanced image to the original image can be maintained much better. Although the methods mentioned above can often increase the contrast of the image, these approaches usually bring some undesired effects.

In [2] the technique known as Adaptive gamma correction using weighting distribution (AGCWD) was presented that modify histograms and enhance contrast in digital images. In this paper, a hybrid HM (histogram modification) method was proposed by combining TGC (Transform based gamma correction) and THE (Traditional histogram equalization) methods. In this method cumulative distribution function (CDF) is utilized directly and normalized gamma function is applied to modify the transformation curve. In adaptive gamma correction (AGC) method compensated CDF is used as an adapted parameter. The AGC method increases low intensity and avoids significant decrement of high intensity. In Weighting distribution the input histogram or probability distribution function (PDF) is modified in such way that the infrequent gray levels are given relatively more probabilities (or weights) than the frequent gray levels. Results of paper showed that this method produced enhanced images of comparable or higher quality than those produced using previous methods.

In recursively separated and weighted histogram equalization (RSWHE) method preserves the image brightness and enhances the image contrast. RSWHE first segments the histogram into two or more sub histograms recursively based on the mean or median of image. Then the histogram weighting module modifies the sub histogram through weighting process and then the histogram

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

equalization module equalizes the weighted sub histograms independently. The recursive separation helps in preservation of mean brightness.

The research worked is focused on improving brightness of images by preserving mean brightness and avoiding unfavorable artifacts by integrating RSWHE and AGCWD methods.

III. PROBLEM FORMULATION

The Histogram equalization is an effective image enhancement technique, but brightness of an image can be changed after the histogram equalization, which is mainly due to the flattening property of the histogram equalization. Image enhancement improves an image appearance by increasing dominance of some features or by decreasing doubt between different regions of the image. Histogram based image enhancement technique is mainly based on equalizing the histogram of the image and increasing the dynamic range corresponding to the image. Approach: Histogram Equalization is widely used in different ways to perform contrast enhancement in images. As a result, such image creates side-effects such as washed out appearance and false contouring due to the significant change in brightness. In order to overcome these problems, mean brightness preserving Histogram Equalization based techniques have been proposed. Generally, these methods partition the histogram of the original image into sub histograms and then independently equalize each sub histogram with Histogram Equalization. To overcome this problem many modifications on histogram equalization have already been proposed such as BBHE, and RMSHE etc. But these methods can generate undesirable artifacts in images such as, over enhancement or excessive noise generation in some cases. BPHEME and CVC methods require high level of computations. So a method should be generated that can enhance image contrast as well as preserve image brightness and having low computational complexity and having results better than existing techniques.

IV. RESEARCH METHODOLOGY

The technique to enhance images will be implemented using MATLAB. MATLAB is a tool for numerical computation and visualization. The basic data element is matrix. An image in MATLAB is treated as a matrix. MATLAB has built in support for matrices and matrix operations, rich graphics capabilities and a friendly programming language and development environment. In image contrast enhancement following steps will be followed: Image acquisition, Calculate histogram of image, Apply improved technique on histogram of image, Obtain enhanced image & Performance measure of method by calculating various parameters.

A. Proposed Algorithm

Our implementation is based on these steps:

- 1) Select or Load the image on which image enhancement is to be done either on grayscale or color.
- 2) Browse the image form browsing window
- 3) In this histogram of image is computed by diving it into various module
 - a) First module is histogram segmentation in which we divide the input image into histogram i.e $H(X)$ recursively up to some recursion level r , generated as 2^r sub histograms. In this two segmented are resulted: Means sub-Histogram segmentation and Medians sub-Histogram segmentation.

B. Means sub-Histogram segmentation

In this segmentation is computed on grayscale level range $[X_L, x_U]$ at a recursion level t ($0 \leq t \leq r$) by formula

$$X_m^t = \left(\sum_{k=1}^u k \cdot P(k) \right) / \left(\sum_{k=1}^u P(k) \right)$$

C. Medians sub-Histogram segmentation: In this segmentation value is computed by a formula:

$$X_d^t = \left\{ \arg \min_{l \leq k \leq u} \left| c(k) - \frac{m_l + m_u}{2} \right| \right\}$$

- 1) Second Module is Histogram weighting Module in which recursion level is computed for i ($0 \leq i \leq 2^r - 1$). In this we compute both highest and lowest probability with P_{\max} and P_{\min} by formula:

$$P_{\max} = \max_{0 \leq k \leq l-1} P(k)$$

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

$$P_{min} = \min_{0 \leq k \leq l-1} P(k)$$

In this then accumulative probability value is computed for each sub-histogram as α_i value sum of all α_i is equal to 1

$$\alpha_i = \sum_{k=l_i}^{u_i} P(k)$$

$$\sum_{i=0}^{2^r-1} \alpha_i = \alpha_0 + \alpha_1 + \alpha_2 + \dots + \alpha_{2^r-1} = 1$$

Original probability value i.e $P(k)$ changes into weighted probability such as $P_w(k)$ by computing value as:

$$P_w(k) = P_{max} * \left[\frac{P(k) - P_{min}}{P_{max} - P_{min}} \right]^{\alpha_i} + \beta, (l_i \leq k \leq u_i)$$

Where $\beta \geq 0$ and $P_w(k)$ such as $r=2$

2) Next Module is Gamma correction in which weighting distribution is again calculated with cdf probability with formula:

$$T(l) = l_{max} \left(\frac{l}{l_{max}} \right)^{\gamma} = l_{max} \left(\frac{l}{l_{max}} \right)^{1-cdf_w(l)}$$

$$\gamma = 1 - cdf_w(l)$$

$$cdf_w(l) = \sum_{i=0}^{l_{max}} pdf_w(l) / \sum pdf_w$$

$$pdf_w(l) = pdf_{max} \left(\frac{pdf_l(l) - pdf_{min}}{pdf_{max} - pdf_{min}} \right)^{\alpha}$$

3) Last Module is Histogram Equalization in which $P_w(k)$ consists 2^r curve segments where i -th curve segment is computed. Each sub histogram equalization is separately equalize for all 2^r for histogram equalization to get combined result.

V. RESULT AND DISCUSSION

The proposed algorithms has been experimentally worked out on gray scale images as well as on color images. Our performance on is measured with various parameters such as PSNR, MSE, AMBE which are tested on images of gray scale and color. In each testing image we have used all image enhancement techniques such as Histogram equalization (HE), Brightness preserving bi histogram equalization (BBHE) and Recursively separated and weighted histogram equalization (RSWHE) for comparing our results. These techniques are compared using parameters PSNR (Peak Signal-to-Noise Ratio), MSE (Mean Square Error) and AMBE (Absolute Mean Brightness Error).

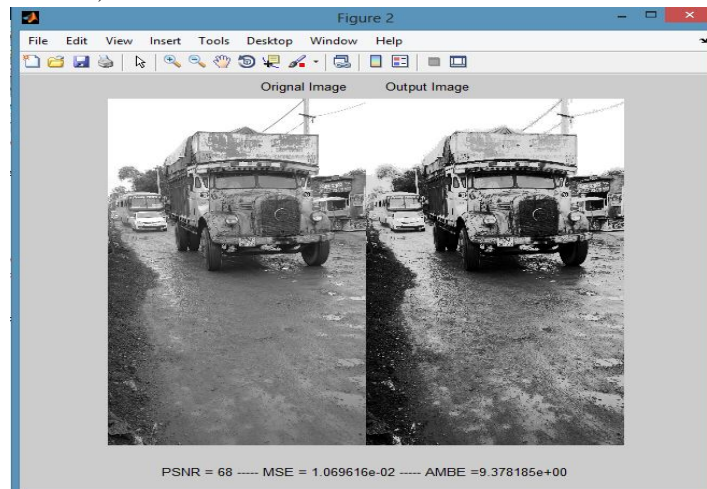


Figure 2: Output image and original image of HE Technique with quality metrics (Gray Scale image)

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

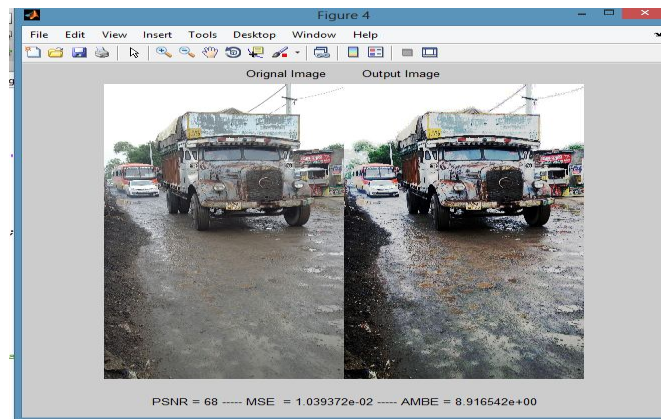


Figure 3: Output image and original image of HE Technique with quality metrics(Color image).

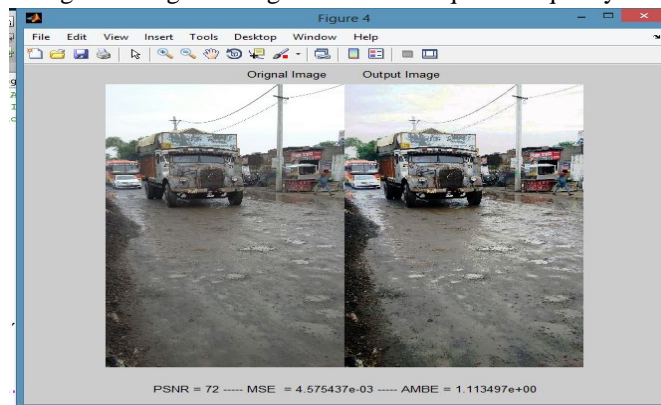


Figure 4: Output image and original image of RSWHE(r=2) Technique with quality metrics (Color image).

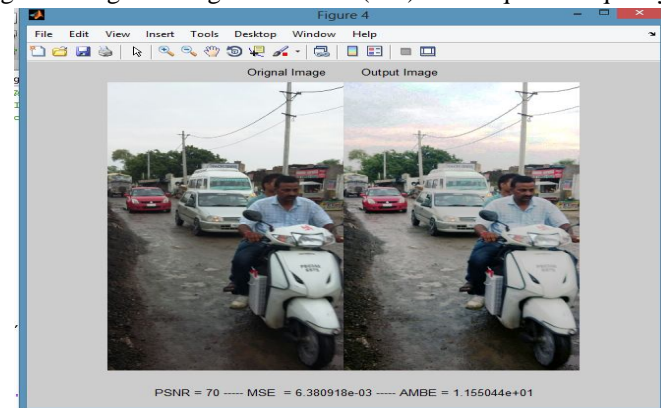


Figure5: Output image and original image of AGCWD (r=0, g=0) Technique with quality metrics (Color image).

TABLE :1PSNR (Peak Signal-to-Noise Ratio)

Images	HE	BBH E	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	64	64	70	66	72
II- image	58	61	69	59	71
III- image	72	72	70	72	73

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

TABLE 2: MSE (Mean Square Error)

Images	HE	BBHE	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	2.38	2.37	6.70	1.51	4.27
II- image	9.49	4.65	8.95	8.57	5.60
III- image	3.68	3.89	6.82	2.25	2.95

TABLE 3: AMBE (Absolute Mean Brightness Error)

Images	HE	BBHE	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	4.30	7.30	1.78	9.47	1.10
II- image	4.78	1.46	1.86	5.44	9.04
III- image	5.32	7.90	1.91	8.93	1.24

For color images

TABLE 5 :PSNR (Peak Signal-to-Noise Ratio)

Images	HE	BBHE	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	66	66	69	66	72
II- image	63	66	70	68	73
III- image	59	68	66	58	69

The values of Parameters i.e quality metrics for the color images had been provided by the proposed algorithm and existing techniques which is shown in table 4.4, 4.5, 4.6. from the table below & above it is verified that PSNR, MSE, ABME values are better of our proposed method as compared to the existing techniques.

TABLE 6: MSE (Mean Square Error)

Images	HE	BBHE	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	2.17	1.78	7.91	1.65	4.24
II- image	3.77	1.58	8.41	1.48	4.44
III- image	7.64	1.15	1.55	9.32	7.96

TABLE 7: AMBE (Absolute Mean Brightness Error)

Images	HE	BBHE	RSWHE (r=2)	AGCWD (r=0,g=0)	Rec+AGCWD (r=2,g=0) (Proposed)
I- image	1.29	1.39	1.97	2.31	1.21
II- image	3.44	1.04	2.12	1.90	1.43
III- image	5.43	2.40	3.14	7.19	2.20

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

The results for image enhancing by using techniques such as HE, BBHE, RSWHE ($r=2$), AGCWD ($r=0$, $g=0$), Rec+ AGCWD ($r=2$, $g=0$) our proposed method. The proposed method give better results as compared by other techniques in term of quality metrics as well as in term of visual quality.

VI. CONCLUSION

Recursive Mean-Separate Histogram Equalization (RMSHE) with scalable brightness preservation is analyzed with HE and BBHE. Histogram analysis providing spatial information of single image, based on probability and statistical inference. Main goal is to provide high level brightness preservation to unpleasant artifacts and equalization while enhancing contrast. By using weighting distribution we smooth fluctuant for avoiding generation of unfavorable artifacts. Automatically gamma correction is used for smoothing curves. It also reduces computational time. The analysis shows that the output mean will converge to the input mean as the number of recursive mean-separation increases. This allows scalable degree of preservation range from 0% (output of HE) - 100% (getting back the original image). In real life applications, the variety of image involve are often too wide to be covered with only a specific level of brightness preservation.

VII. FUTURE WORK

The work, up to the current stage has shown how it enhances the images, next our purposed method is to work on Novel enhancement method video sequences. It also suggested is to look into proper mechanism to automate the selection of the recursion level that gives optimum output. This thesis also suggests looking into the effective implementation of RMSHE, in the similar fashion of how Quantized Mean-Separate HE [5] has been proposed as a cost reduced implementation for BBHE.

REFERENCES

- [1] Aggarwal .A.,et.al, "An Adaptive Image Enhancement Technique Preserving Brightness Level Using Gamma Correction," Advance In Electronic And Electric Engineering, ISSN 2231-1297, Vol. 3, No. 9, pp. 1097-1108, 2013.
- [2] Amiri, et.al, "Texture Based Image Enhancement Using Gamma Correction", Middle-East Journal of Scientific Research, 2010, Vol. 6, pp. 569-574.
- [3] Bagade, et.al, "USE OF HISTOGRAM EQUALIZATION IN IMAGE PROCESSING FOR IMAGE ENHANCEMENT", International Journal of Software Engineering Research & Practices Vol.1, Issue 2, April, 2011.
- [4] Bedi. S.S., Khandelwal, "Various Image Enhancement Techniques- A Critical Review", International Journal of Advanced Research in Computer and Communication Engineering, Vol. 2, Issue 3, March 2013, ISSN (Print): 2319-5940.
- [5] Celik. T, Tjahjadi .T, "Contextual and variational contrast enhancement," IEEE Transaction on Image Processing, Vol. 20, No 12, Dec 2011.
- [6] Chauhan. R, et.al, "An improved image contrast enhancement based on histogram equalization and brightness preserving weight clustering histogram equalization," 2011 International Conference on Communication Systems and Network Technologies.
- [7] Cheng, et.al, "A simple and effective histogram equalization approach to image enhancement", Elsevier, Digital Signal Processing 14 (2004) 158–170.
- [8] Chen, et.al, "Preserving brightness in histogram equalization based contrast enhancement techniques", ELSEVIER, Digital Signal Processing 14 (2004) 413–428.
- [9] Chen. Q, et.al, "A solution to the deficiencies of image enhancement", Signal Processing, Vol. 90, 2010, p.p. 44-56.
- [10] Chen S.-D, et.al, "Preserving brightness in histogram equalization based contrast enhancement techniques", Elsevier, Digital Signal Processing 14 (2004) 413–428.
- [11] Kaur. M, et.al, "Survey of Contrast Enhancement Techniques based on Histogram Equalization", (IJACSA) International Journal of Advanced Computer Science and Applications, Vol. 2, No. 7, 2011.
- [12] Kim, "Contrast enhancement using brightness preserving bi-histogram equalization," IEEE Transactions on Consumer Electronics, Vol. 43, No. 1, February 1997.
- [13] Kim. M, et.al, "Recursively separated and weighted histogram equalization for brightness preservation and contrast enhancement," IEEE Transactions on Consumer Electronics, Vol. 54, No. 3, August 2008.
- [14] Lee. S, "Content-based image enhancement in the compressed domain based on multi-scale α -rooting algorithm", Pattern Recognition Letters, 2006, Vol. 27, pp. 1054-1066.
- [15] Maini. R, et.al, "A Comprehensive Review of Image Enhancement Techniques", JOURNAL OF COMPUTING, VOLUME 2, ISSUE 3, MARCH 2010, ISSN 2151-9617.
- [16] Mohanram, et.al, "An optimized image enhancement of foggy images using gamma adjustment," International Journal of Advanced Research in Electronic sand Communication Engineering (IJARECE), Volume 3, Issue 2, February 2014.
- [17] Ooi, et.al., "Bi-Histogram Equalization with a Plateau Limit for Digital Image Enhancement", IEEE Trans. Consumer Electronics, Vol. 55, No. 4, NOVEMBER 2009.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)