



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 5 Issue: VI Month of publication: June 2017

DOI:

www.ijraset.com

Call: ☎ 08813907089

E-mail ID: ijraset@gmail.com

Human Activity Recognition in Video on Exploration of Hog

Swathi S B¹, Siddanna S R²

¹Department of Computer Science and Engineering

²S J B Institute of Technology, Bengaluru, Karnataka, India

Abstract: *The analysis of human activities is one of the most important open issues for the automated video surveillance community. Since few years ago, human activity/behavior has been handled by Computer Vision and Pattern Recognition perspective and contributed more of various fields. This paper is the first review analyzing new trend, proposing a structured snapshot of the state of the art and novel challenges in the surveillance domain with well-known techniques made along with the performances of different distance measures on KTH dataset.*

Keywords: *Human Activity; Computer Vision; Video Surveillance HOG; Distance Measures; Benchmark Dataset.*

I. INTRODUCTION

Human activity analysis has been one of the most important topics and becoming one of the most active research areas in computer vision. Human behavior analysis in computer vision perspective as an emerging technology towards many video surveillance applications. Automated video surveillance is any technology with principle helps to detect/categorize human behavior in video data under all kinds of context involving diverse actions/body language, variant backgrounds, human poses, occlusions, motion activities and etc. Analyzing activities involved to date the recognition of motion patterns, and the production of high-level descriptions of actions and interactions among entities of interest. Computer Vision and Pattern Recognition perspective, where an activity corresponded to a temporal sequence of explicit actions (run, stop, sit, walk, etc) . More recently, the automated surveillance of human activities has been faced considering a new perspective. The goal is to efficiently extract useful information from a huge amount of videos collected by surveillance cameras by automatically detecting, tracking and recognizing objects of interest, and understanding and analyzing their activities. Video surveillance has a wide variety of applications both in public and private environments, such as homeland security, crime prevention, traffic control, accident prediction and detection, and monitoring patients, elderly and children at home. There is an increasing interest in video surveillance due to the growing availability of cheap sensors and processors, and also a growing need for safety and security from the public. Nowadays there are tens of thousands of cameras in a city collecting a huge amount of data on a daily basis. Researchers are urged to develop intelligent systems to efficiently extract information from large scale data. Interpretation of human behavior is hard to categorize, and even harder to train a computer to interpret. Methods for the motion of body parts, the tracking of human motion using different camera settings and the recognition of activities are reported [1]. Computer vision helps in developing intermediate representation between understanding the low-level image/video content and high level semantics which is almost a replica of human vision [2]. Several applications have been developed to detect human behavior in context with intellectual, professional and social actions [4]. The covered topics include In section II, background work. In section III, proposed method. Datasets and Experimental producers in section IV. Results in V. At the end conclusion.

II. RELATED WORK

The categorization of human actions in video surveillances gained large concern in computer vision society. The most challenging task before activity analysis is mainly to detect and track humans in cluttered video scenes. Many surveys on activity analysis have been proposed in the literature.

A. Pedestrian Detection via Classification on Riemannian Manifolds

Since machine learning techniques are less suitable for learning classifiers, novel approach for classifying Riemannian manifold

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

points is proposed to detect pedestrian INRIA and DaimlerChrysler datasets.

B. A Survey of Computer Vision-Based Human Motion Capture

Aggarwal give an overview of various methods used prior to 1995, in articulated and elastic nonrigid motion. After a good overview of various motion types the approaches within articulated motion with or without a priori shape models are described. Then the elastic motion approaches are described in two categories with and without a shape model.

C. Detecting Pedestrians Using Patterns of Motion and Appearance

The field of human motion analysis is quite broad and has a history stretching back to the work of Hoffman and Flinch Baugh. Much of the field has presumed that the moving object has been detected, and that the remaining problem is to recognize, categorize, or analyze the long-term pattern of motion. Interest has recently increased because of the clear application of these methods to problems in surveillance.

D. Video Anomaly Detection using Selective Spatio-Temporal Interest Points and Convolutional Sparse Coding

Humans are most repeated and perhaps the most important content in videos and analyzing their activities is even more interesting. Recognizing human activities in complex environments and interpreting those possible actions in different circumstances is not easy. Analysis and classification of human activities in videos (acquired from surveillance cameras) has gained more concern for several applications such as health care, education & research, entertainment, defense, intrusion & abnormal events detection and other related areas.

E. Learning and understanding dynamic scene activity and A survey on visual surveillance of object motion and behaviors

In statistical models like Dynamic Bayesian Networks are addressed as one of the most suitable tools for activity recognition. An essay on the different components of a typical video surveillance system, with emphasis on the activity analysis, is reported.

F. Recognizing Human Actions: A Local SVM Approach

The motivation behind classifying human activities in video is based on threefold issue such as data, content & applications. As video data continues to grow, it becomes very cumbersome task to manually annotate/index video according to its content. Hence, it has become very crucial to develop and explore some novel techniques to extract the information content.

III. PROPOSED WORK

Proposed method of human activity analysis can be classified into two stages, i) Feature extraction & ii) Classification.

An assessment of human activity analysis is done by using state-of-the-art techniques for feature extraction and four different distance measure techniques for classification.

A. Feature Extraction

Histogram of oriented gradients (HOG) are considered to extract discriminative features from video frames and are briefed in following section

B. HOG (Histogram of Oriented Gradients)

Edge directions are commonly referred to as distribution of intensity gradients. HOG is type of feature descriptor that typically uses global features to describe and detect humans rather than just a collection of local features [19]. HOG is implemented by dividing image into small cells (usually 3X3 cells) and computed horizontal & vertical gradients without smoothing. Later, histogram is applied to each cells and quantized into 9 bins with smoothing using Gaussian. The oriented edges are obtained using wavelet filters. HOG can be computed with following two steps.

1) *Computing gradients:* Find x & y derivatives and filter masks (obtained by wavelets) in x& y directions. Gradient magnitude and gradient directions are calculated using

$$m(x,y) = \sqrt{x^2 + y^2} \text{ \& } \theta = \tan^{-1} y/x$$

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

2) *Gradient histograms*: For a 3X3 cell, gradient vector at each pixel is computed by considering 9 gradient vectors and put them into 9 histogram bins. The histogram ranges from 0 – 180° considered 20° orientation per bin. Magnitude of the gradient vector obtained will be assigned between two closest bins.

C. Classification

Features obtained from HOG techniques are given to classifiers in order to assign the class value to the query video. Four different distance measure techniques are used as classifiers to classify the test video from learned video samples. Manhattan distance, Euclidean distance, Modified Squared Euclidean distance, Angle-based distance are used.

IV. DATASET

A. Datasets

Benchmark dataset are considered, KTH action dataset [15] in following subsections.

1) *KTH Action dataset*: KTH action dataset is very popular and widely used dataset for human activity analysis [13, 17 & 18], consists of 6 types of human activities such as boxing, hand clapping, hand waving, jogging, running and walking for some sample images). Each class consists of 100 videos at 25fps (frames per second) with 25 different people performing those respective actions in 4 different scenarios such as outdoor, indoor, variant scales and with different outfits.

B. Experiments & Experimental Procedures

Experiments are carried out in conventional mode by dividing videos of dataset into train and test.

In KTH dataset, all 4 scenarios of one single person in all the classes are considered to be as training data (total no. of frames trained = 4X6X50 frames = 1200) and remaining videos for test (all 50 frames/video are considered).

V. IMPLEMENTATION

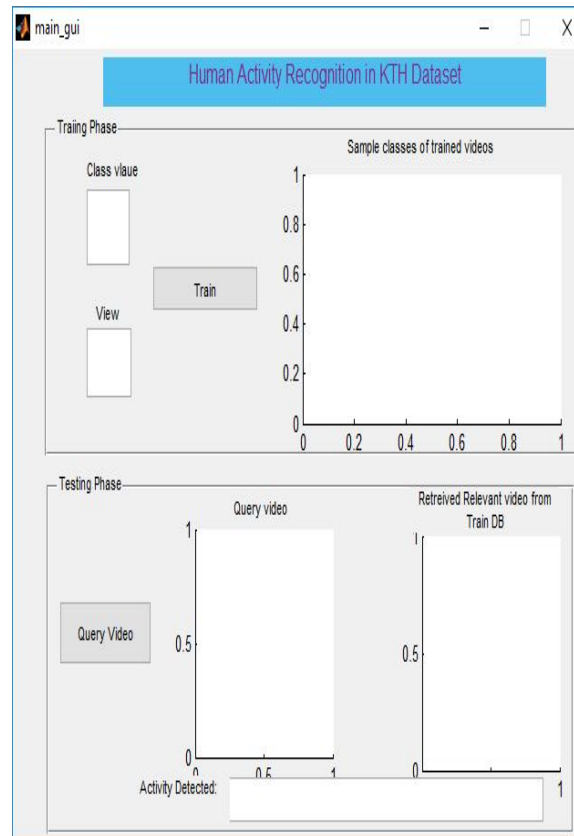


Fig: Initial GUI form of Human activity in KTH dataset

The screenshot shows the MATLAB R2014a environment. The Command Window displays the following code:

```

> Editor: C:\Users\Susha\Desktop\Phase 2\math\HOG\main_gui.m
main_gui.m
1 function varargout = main_gui(varargin)
    Command Window
    class_1.m
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
101
```

The screenshot displays the MATLAB R2014b environment. The script editor on the left contains the following code:

```

% C:\Users\Swathi\Desktop\Phase2\Swathi\HOG\main_gui.m
Editor: C:\Users\Swathi\Desktop\Phase2\Swathi\HOG\main_gui.m
main_gui.m
1 function varargout = main_gui(varargin)
Command Window
2
3
4
5
6
7
8 ii =
9
10 50
11
12 class_label =
13
14 2
15
16 class_label =
17
18 2
19
20 class_label =
21
22 2
23
24 class_label =
25
26 2
27
28 class_label =
29
30 2
31
32 class_label =
33
34 2
35
36 class_label =
37
38 2
39
40 class_label =
41
42 2
43
44 class_label =
45
46 2
47
48 class_label =
49
50 2
51
52 class_label =
53
54 2
55
56 class_label =
57
58 2
59
60 class_label =
61
62 2
63
64 class_label =
65
66 2
67
68 class_label =
69
70 2
71
72 class_label =
73
74 2
75
76 class_label =
77
78 2
79
80 class_label =
81
82 2
83
84 class_label =
85
86 2
87
88 class_label =
89
90 2
91
92 class_label =
93
94 2
95
96 class_label =
97
98 2
99
100 class_label =
101
102 2
103
104 class_label =
105
106 2
107
108 class_label =
109
110 2
111
112 class_label =
113
114 2
115
116 class_label =
117
118 2
119
120 class_label =
121
122 2
123
124 class_label =
125
126 2
127
128 class_label =
129
130 2
131
132 class_label =
133
134 2
135
136 class_label =
137
138 2
139
140 class_label =
141
142 2
143
144 class_label =
145
146 2
147
148 class_label =
149
150 2
151
152 class_label =
153
154 2
155
156 class_label =
157
158 2
159
160 class_label =
161
162 2
163
164 class_label =
165
166 2
167
168 class_label =
169
170 2
171
172 class_label =
173
174 2
175
176 class_label =
177
178 2
179
180 class_label =
181
182 2
183
184 class_label =
185
186 2
187
188 class_label =
189
190 2
191
192 class_label =
193
194 2
195
196 class_label =
197
198 2
199
200 class_label =
201
202 2
203
204 class_label =
205
206 2
207
208 class_label =
209
210 2
211
212 class_label =
213
214 2
215
216 class_label =
217
218 2
219
220 class_label =
221
222 2
223
224 class_label =
225
226 2
227
228 class_label =
229
230 2
231
232 class_label =
233
234 2
235
236 class_label =
237
238 2
239
240 class_label =
241
242 2
243
244 class_label =
245
246 2
247
248 class_label =
249
250 2
251
252 class_label =
253
254 2
255
256 class_label =
257
258 2
259
260 class_label =
261
262 2
263
264 class_label =
265
266 2
267
268 class_label =
269
270 2
271
272 class_label =
273
274 2
275
276 class_label =
277
278 2
279
280 class_label =
281
282 2
283
284 class_label =
285
286 2
287
288 class_label =
289
290 2
291
292 class_label =
293
294 2
295
296 class_label =
297
298 2
299
300 class_label =
301
302 2
303
304 class_label =
305
306 2
307
308 class_label =
309
310 2
311
312 class_label =
313
314 2
315
316 class_label =
317
318 2
319
320 class_label =
321
322 2
323
324 class_label =
325
326 2
327
328 class_label =
329
330 2
331
332 class_label =
333
334 2
335
336 class_label =
337
338 2
339
340 class_label =
341
342 2
343
344 class_label =
345
346 2
347
348 class_label =
349
350 2
351
352 class_label =
353
354 2
355
356 class_label =
357
358 2
359
360 class_label =
361
362 2
363
364 class_label =
365
366 2
367
368 class_label =
369
370 2
371
372 class_label =
373
374 2
375
376 class_label =
377
378 2
379
380 class_label =
381
382 2
383
384 class_label =
385
386 2
387
388 class_label =
389
390 2
391
392 class_label =
393
394 2
395
396 class_label =
397
398 2
399
400 class_label =
401
402 2
403
404 class_label =
405
406 2
407
408 class_label =
409
410 2
411
412 class_label =
413
414 2
415
416 class_label =
417
418 2
419
420 class_label =
421
422 2
423
424 class_label =
425
426 2
427
428 class_label =
429
430 2
431
432 class_label =
433
434 2
435
436 class_label =
437
438 2
439
440 class_label =
441
442 2
443
444 class_label =
445
446 2
447
448 class_label =
449
450 2
451
452 class_label =
453
454 2
455
456 class_label =
457
458 2
459
460 class_label =
461
462 2
463
464 class_label =
465
466 2
467
468 class_label =
469
470 2
471
472 class_label =
473
474 2
475
476 class_label =
477
478 2
479
480 class_label =
481
482 2
483
484 class_label =
485
486 2
487
488 class_label =
489
490 2
491
492 class_label =
493
494 2
495
496 class_label =
497
498 2
499
500 class_label =
501
502 2
503
504 class_label =
505
506 2
507
508 class_label =
509
510 2
511
512 class_label =
513
514 2
515
516 class_label =
517
518 2
519
520 class_label =
521
522 2
523
524 class_label =
525
526 2
527
528 class_label =
529
530 2
531
532 class_label =
533
534 2
535
536 class_label =
537
538 2
539
540 class_label =
541
542 2
543
544 class_label =
545
546 2
547
548 class_label =
549
550 2
551
552 class_label =
553
554 2
555
556 class_label =
557
558 2
559
560 class_label =
561
562 2
563
564 class_label =
565
566 2
567
568 class_label =
569
570 2
571
572 class_label =
573
574 2
575
576 class_label =
577
578 2
579
580 class_label =
581
582 2
583
584 class_label =
585
586 2
587
588 class_label =
589
590 2
591
592 class_label =
593
594 2
595
596 class_label =
597
598 2
599
600 class_label =
601
602 2
603
604 class_label =
605
606 2
607
608 class_label =
609
610 2
611
612 class_label =
613
614 2
615
616 class_label =
617
618 2
619
620 class_label =
621
622 2
623
624 class_label =
625
626 2
627
628 class_label =
629
630 2
631
632 class_label =
633
634 2
635
636 class_label =
637
638 2
639
640 class_label =
641
642 2
643
644 class_label =
645
646 2
647
648 class_label =
649
650 2
651
652 class_label =
653
654 2
655
656 class_label =
657
658 2
659
660 class_label =
661
662 2
663
664 class_label =
665
666 2
667
668 class_label =
669
670 2
671
672 class_label =
673
674 2
675
676 class_label =
677
678 2
679
680 class_label =
681
682 2
683
684 class_label =
685
686 2
687
688 class_label =
689
690 2
691
692 class_label =
693
694 2
695
696 class_label =
697
698 2
699
700 class_label =
701
702 2
703
704 class_label =
705
706 2
707
708 class_label =
709
710 2
711
712 class_label =
713
714 2
715
716 class_label =
717
718 2
719
720 class_label =
721
722 2
723
724 class_label =
725
726 2
727
728 class_label =
729
730 2
731
732 class_label =
733
734 2
735
736 class_label =
737
738 2
739
740 class_label =
741
742 2
743
744 class_label =
745
746 2
747
748 class_label =
749
750 2
751
752 class_label =
753
754 2
755
756 class_label =
757
758 2
759
760 class_label =
761
762 2
763
764 class_label =
765
766 2
767
768 class_label =
769
770 2
771
772 class_label =
773
774 2
775
776 class_label =
777
778 2
779
780 class
```

VI. CONCLUSION

©IJRASET: All Rights are Reserved

International Journal for Research in Applied Science & Engineering Technology (IJRASET)

Discussed computer vision and pattern recognition technologies are closely related to each other. Several techniques addressing the core problems in human activity analysis can be witnessed in the literature, but rarely being noticed the highlights of contributions made and benchmarking the algorithms considering standard test procedures. The goal of this review is to support comprehensive analysis of HOG towards human activity analysis in video surveillance systems in computer vision perspective.

REFERENCES

- [1] J.K. Aggarwal, Q. Cai, Human motion analysis: a review, *Comput. Vision Image Understanding* 73 (3) (2000) 428–440
- [2] K. Mahantesh. IReS: Image Retrieval Systems – Some Novel Approaches. Ph.D Thesis submitted to VTU, Belgaum, India. 2015.
- [3] Albert Ali Salah, Theo Gevers. *Computer Analysis of Human Behavior*. ISBN 978-0-85729-993-2, Springer, 2011.
- [4] T. B. Moeslund, A. Hilton, V. Kruger, A survey of advances in vision-based human motion capture and analysis, *Comput. Vision Image Understanding* vol. 104, no. 2, pp. 90–126, 2006.
- [5] J. Aggarwal, M. Ryoo, Human activity analysis: a review, *ACM Comput. Surv.* 43 (2011) 1–43.
- [6] W. Hu, T. Tan, L. Wang, S. Maybank, A survey on visual surveillance of object motion and behaviors, *IEEE Trans. Syst. Man Cybern.* 34 (2004) 334–352.
- [7] L. Zhang, S. Li, X. Yuan, S. Xiang, Real-time object classification in video surveillance based on appearance learning, in: *Proceedings of IEEE Conference on Computer Vision and Pattern Recognition, (CVPR 2007)*, 2007, pp. 1–8.
- [8] P. Scovanner, M. Tappen, Learning pedestrian dynamics from the real world, in: *Proceedings of International Conference on Computer Vision*, 2009, pp. 381–388.
- [9] Deva Ramanan, David A. Forsyth, Andrew Zisserman, Tracking People by Learning their Appearance, *Ieee Transactions on Pattern Analysis And Machine Intelligence*, Vol. 29, No. 1, pp. 65 – 81, 2007.
- [10] S. Tellex, D. Roy, Towards surveillance video search by natural language query, in: *Proceedings of International Conference on Image and Video Retrieval*, 2009, pp. 1–8
- [11] P. Viola, M. J. Jones, D. Snow, Detecting pedestrians using patterns of motion and appearance, *Proceedings. Ninth IEEE International Conference on Computer Vision*, vol. 2, pp. 734 – 741, 2003
- [12] J. Berclaz, F. Fleuret, P. Fua, Robust People Tracking with Global Trajectory Optimization, *IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'06)*, pp. 744 – 750, 2006.
- [13] Christian Schuldt, Ivan Laptev & Barbara Caputo, Recognizing Human Actions: A Local SVM Approach, *Proceedings of the 17th International Conference on Pattern Recognition (ICPR'04)*, vol. 3, pp. 32–36, 2004
- [14] Ivo Everts, Jan C. van Gemert, Theo Gevers, Evaluation of Color Spatio-Temporal Interest Points for Human Action Recognition, *IEEE Transactions on Image Processing*, Vol. 23, issue 4, pp. 1569–1580, 2014
- [15] <http://www.wisdom.weizmann.ac.il/~vision/SpaceTimeActions.html>
- [16] Ivan Laptev and Tony Lindeberg, Local Descriptors for Spatio-Temporal Recognition, *ECCV Workshop "Spatial Coherence for Visual Motion Analysis"*.
- [17] I. Laptev and T. Lindeberg, Space-Time Interest Points, in *Proc. ICCV'03*, pp. 432–439, 2003
- [18] C. Stauffer, Estimating tracking sources and sinks, in: *Proceedings of Computer Vision and Pattern Recognition Workshop (CVPRW)*, 2003, pp. 35–35
- [19] An Investigation of Combining Gradient Descriptor and Diverse Classifiers to Improve Object Taxonomy in Very Large Image Dataset, in the proceedings of *International Conference on Contemporary Computing and Informatics (IC3I)*, IEEE, pp. 581–585, 2014
- [20] Mahantesh K, Anushree T R, Hemavathi N, An Investigation of Combining Gradient Descriptor and Diverse Classifiers to Improve Object Taxonomy in Very Large Image Dataset, in the proceedings of *International Conference on Contemporary Computing and Informatics (IC3I)*, IEEE, pp. 581–585, 2014.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)