



iJRASET

International Journal For Research in
Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 6 Issue: III Month of publication: March 2018

DOI: <http://doi.org/10.22214/ijraset.2018.3210>

www.ijraset.com

Call:  08813907089

E-mail ID: ijraset@gmail.com

A Comprehensive Review on Waste Fish Oil as Feed-Stock of Biodiesel

Srivella Vijaya Bhaskar ¹

¹ Department of Mechanical Engineering, Sreenidhi Inst. of Sci. & Tech., Hyderabad, TS, India

Abstract: *The rapidly declining fossil fuel reserves across globe, upsurge in usage of petro-diesel fuel and very hazardous effect on environment fascinated the researchers towards economically feasible, eco-friendly plant based vegetable oil and animal fat based biodiesel as alternative renewable fuel to replace partially or completely the fossil fuel. Recently biodiesel produced from feedstock such as vegetable oil or animal fat using by the transesterification process has more attention. But some researchers revealed that edible vegetable oil based biodiesel may cause rise in food-product price and eventually trigger for food-crisis for future generations. On the other side, even though non-edible oil plants are cultivated in barren and uncultivated waste lands, the production cost of non-edible oil also increased due to heavy use of fertilizers and intense usage of pesticides. The best alternative to cut the price of biodiesel feed stock was identified animal fat and fish waste as feed stock. This is because in livestock and aqua industry that globally, over a million tons of animal fat and fish parts such as fins, viscera, tails, eyes etc., have been unused/underutilized and most of the time discarded as a waste. In this review paper, a comprehensive review has been conducted to study the different research accomplishments on fish and aqua waste as feed-stock of biodiesel in the production alternative bio-fuel for a diesel engine.*

Keywords: *Biodiesel, Methyl Ester, Animal fat, Fish oil, Performance and emission characteristics, Transesterification.*

I. INTRODUCTION

The national economic and energy security are threatened by the global energy crisis, which is due to disruption of fossil fuel supplies, interruption of crude oil production from fossil fuel rich countries such as OPEC nations and increase in production cost which rapidly raise the fuel prices. These also have a considerable impact on importing nations' economy and meeting the energy needs due rapid consumption of fossil fuels especially in automobiles. The most probable way to meet this increasing demand is by the renewable biodiesel as alternative fuel [1-3]. The chemical properties of biodiesel are almost similar to petro-diesel fuel and it became a most fascinating set in bio-fuels, because it can be used directly in any unmodified diesel engine [4]. Besides the biodiesels are clean burning, most environmental friendly and non-toxic fuel than petroleum based fossil fuels.

In the recent decades, many researches were conducted experimental investigations with vegetable based edible oils such as soybean, peanut, sunflower, etc., and with non-edible sources such as Jatropha oil, Simarouba oil, Mahua oil, Neem oil, Karanja oil etc., to replace the petro-diesel with a suitable alternative biodiesel [5-7]. The vegetable oils as feed-stock of biodiesel have many predilections such as oil can be cultivated in a short period of time, many plants related non-edible oils can grow in uncultivated waste lands with minimum water source [7-9].

Vegetable oils and animal fats can be used as is in a diesel engine without any modification, yet not ideal because of their higher viscosities and lower volatilities which make it incomplete and inefficient for combustion engines. Be that as it may, the possibility of using vegetable oils as fuel has been perceived, just when therefore modified by using transesterification process to get fatty alkyl esters of the vegetable oil and animal fats which can be considered as fuel that has comparative properties as diesel fuel [10-11]. The reviewed literature revealed that the transesterification process is a most suitable and distinctive method for preparation of biodiesel from animal fat, aqua waste and waste cooking oil. From the experimental studies, it has been unveiled that the biodiesels typically causes the reduction in engine torque and power, but the lower smoke emissions, carbon dioxide, carbon monoxide, pollution and with the biodiesel as compared to neat diesel with a minor increased in NO_x exhaust emissions.

The biodiesels are prepared from edible oils have raised a concern about cost of the food products, especially in thickly populated developing countries. For this reason, the research and production of biodiesel then focused towards using non-edible oils such as Jatropha curcas oil, Cotton seeds oil, Karanja oil, Linseed oil, Mustard oil, Neem oil etc., as biodiesel feed-stock. Though the non-edible vegetable oil seeds can be grown-up in uncultivated, unfertile barren lands with very less water in uneven intervals, the usage pesticides and fertilizers are increasing the cost of production of feedstock and became as costly as edible oil feedstock [12]. Although adequate and significant work has been carried out to evaluate the characteristics of diesel engine using biodiesels produced from both edible and non-edible vegetable oils, from the literature it was observed that inadequate amount of work has

been done to analyze the characteristics of DI diesel engine fuelled with animal-fat based biodiesels especially waste fish oil. Hence this paper is concerned to review of previous work related to fish oil methyl ester (FOME) and its diesel blends used in diesel engine.

II. MATERIALS AND METHODS

In general, the biodiesel will be prepared using transesterification, micro-emulsion, pyrolysis, technique or by direct blending with diesel fuel. Transesterification chemical process is one of the best processes to reduce the viscosity of the vegetable or animal fat oil and to increase the cetane number of biodiesel. The chemical reaction of transesterification process was given in figure 1.

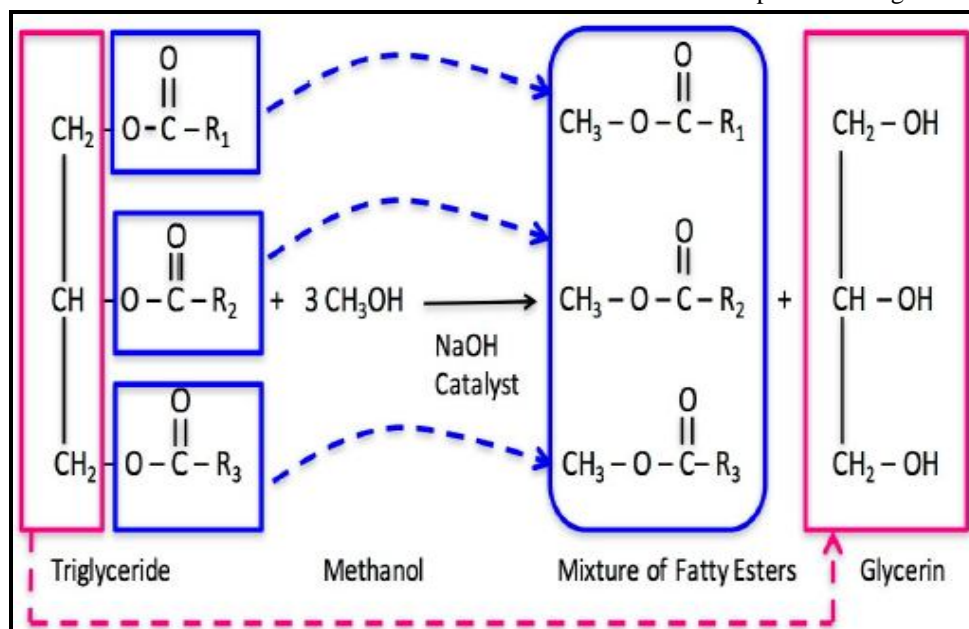


Fig. 1 Transesterification Process.

These transesterified plant based vegetable oils after chemical reactions with ethyl or methyl alcohol will produce diesel engine friendly fuel. Generally, biodiesels are produced through the reaction of vegetable oils with methanol in the presence of catalyst to yield glycerine and methyl esters. Methanol in the presence of NaOH as a catalyst was used for transesterification of vegetable oil. The parameter involved in the above processing includes the amount of catalyst, reaction temperature, molar ratio of alcohol to vegetable oil, and reaction time. The fuel properties of diesel and fish oil biodiesel (FOME) are shown in table I.

TABLE I
PROPERTIES OF DIESEL AND MIOME BODIESEL

Fuel Property	Unit	ASTM Standards	Diesel	FOME
Kinematic Viscosity @ 40 ^o C	CST	D445	3.52	5.85
Flash Point	^o C	D93	49	167
Density @ 30 ^o C	kg/m ³	D1298	840	875
Calorific Value	kJ/kg	D4868	42850	38000
Cetane Number	--	D613	50	53
Carbon Residue	% w/w	D4530	0.1	0.48
Total Sulphur	% by mass	D5453	0.01	0.05
Ash	% by mass	D1119	0.01	0.03

A. Experimental Setup

The experimental work can be conducted using the following experimental setup as shown in figure 2 and 3. The experimental setup is demonstrated as schematic diagram below at figure 2 and photographic view in figure 3.. The setup consists of diesel engine, eddy current dynamometer, smoke meter, and exhaust gas analyser. The eddy current dynamometer was coupled with a test engine to operate the engine at various loads such as 25, 50, 75 and 100% load conditions.

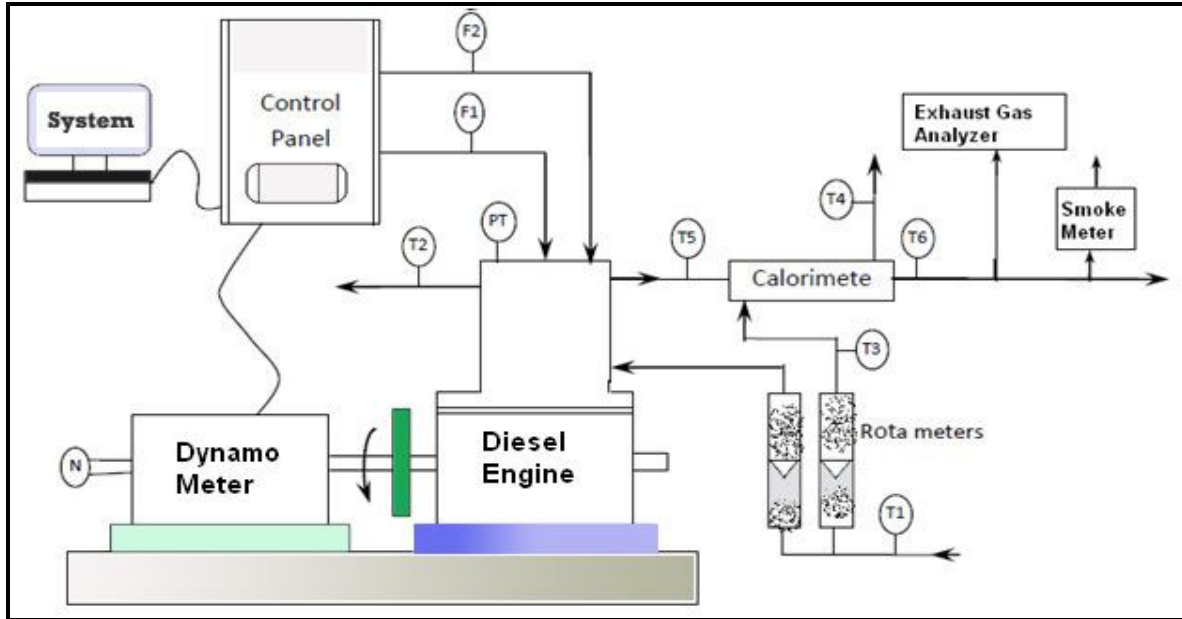


Fig. 2. Schematic Diagram of Experimental Setup

T1	Inlet water temperature	PT	Pressure transducer
T2	Outlet engine jacket water temp	F1	Air intake differential pressure unit
T3	Inlet water temperature	F2	FuelFlow differential pressure unit
T4	Outlet cal. water temperature	T6	Exhaust gas temperature after Cal
T5	Exhaust gas temperature before Cal		



Fig. 3. Photographic View of Experimental Setup

III. WASTE FISH OIL AS BIODIESEL FEED-STOCK

In the past few decades, the biodiesel from vegetable oils has increased momentum, but the availability of feedstock for biodiesel has become a critical and crucial challenge faced. It was observed that over a million tons of fish wastes worldwide have been unused or underutilized. Generally, in the making process of fish food products, the fins, viscera, tails, eyes are substantially discarded. The discarded parts of the fish are generally converted into fishmeal for livestock and have very modest economic value. However, the crude fish oil extracted from these discarded parts may provide profuse, inexpensive, and stable source of raw oil to allow the countries like India which have vast coastal area to produce biodiesel and thus help to reduce dangerous emissions. Kerihuel et al. (2005) studied the performance and emissions of diesel engine by conducting series of experiments using micro emulsions of animal fat with water and methanol. An increased volumetric efficiency and reduced exhaust gas temperatures than conventional diesel fuel was observed. They also noticed reduced NO_x, CO and un-burnt hydrocarbon emissions when biodiesel used as fuel [13]. Metin et al. (2010) evaluated the exhaust emissions and engine performance of a single cylinder, CI direct injection engine when 10% blend of chicken fat methyl ester and diesel fuel with synthetic Mg additive used as fuel with several engine speeds from 1800 rpm to 3000 rpm. Their experimental results identified no change in engine torque, but observed increase in specific fuel consumption (SFC) and this is due to lower heating value of biodiesel. They also noticed decrease in CO and smoke emission, but identified an increased NO_x emission by 5% [14]. Preto et al. (2008) evaluated the engine combustion and emission properties of a horizontally mounted, front firing, tunnel furnace using blend of fish oil and No.2 fuel oil. They observed good combustion characteristics with less exhaust emissions except NO emission [15]. Sharanappa Godiganur et al. (2009) investigated the influence of methyl ester of fish oil (biodiesel) and its diesel blends on the engine characteristics in terms of performance and emissions of a Kirloskar H394 DI-CI engine. The study results identified insignificant change in performance and combustion characteristics except reduction in exhaust emissions other than NO_x emission. The optimum result with higher thermal efficiency was observed for 20% blend of biodiesel with diesel fuel [16]. Cengiz Oner et al. (2009) used inedible animal tallow biodiesel and its blends as fuel and conducted series of experiments to evaluate the performance and emissions. They noticed reduction in thermal efficiency, increased specific fuel consumption, but overall performance is comparable to diesel fuel. This is because of low heating value of animal tallow biodiesel fuel. It was also observed that low carbon monoxide, NO_x emissions and high EGT with B20 blend and low NO_x, CO, smoke density and SO₂ emissions with B100 blend [17]. Cherng-Yuan et al. (2009) conducted experiments using trans-esterified fish oil as biodiesel and compared with waste cooking oil methyl ester. From the experimental test results revealed lower fuel consumption and less BSFC with waste cooking oil methyl ester when compared with fish oil methyl ester. However higher NO_x emission, EGT and black smoke opacity was observed with waste cooking oil biodiesel due to its higher heating value, elemental carbon, cetane index, and content of hydrogen than that of fish oil biodiesel [18]. Lin & Li. (2009) investigated the performance and emissions of four stroke, 4-cylinder, naturally aspirated, DI diesel engine using marine fish oil biodiesel, waste cooking oil biodiesel and compared with petro-diesel fuel. The higher fuel consumption rate, more brake fuel conversion efficiency and NO_x emissions while the lower EGT, carbon monoxide (CO) emission, and black smoke density at speeds lower than 1400 rpm was observed for two biodiesels when compared with 2D diesel fuel. The reduced brake fuel conversion efficiency was noticed with both biodiesels at speeds more than 1400 rpm. Furthermore, the biodiesels have low carbon content and high elemental oxygen content when compared with ASTM No. 2D type diesel fuel [19]. Sakthivel et al. (2011) evaluated the characteristics of a single cylinder DI-CI engine by conducting series of experiments using fish oil ethyl ester (biodiesel) and its diesel blends. They noticed insignificant change in performance and reduced emission characteristics such as NO_x, smoke density, hydro-carbon, carbon monoxide (CO) except trivial raise in CO₂. This is because the properties of biodiesel such as density, kinematic viscosity; flash point and calorific value are almost similar to that of petro-diesel fuel [20]. Rasim Behçet (2011) investigated the effect of blends of anchovy fish oil biodiesel and its diesel blends on emission and engine performance of single cylinder, CIDI engine at variable load conditions. Their test results shown reduction in engine torque, in engine power, and increased specific fuel consumption with fish oil biodiesel and its blends when compared with diesel fuel was noticed. However reduced emission such as CO, CO₂, HC and increased NO_x emission was observed with biodiesel and its blends than that of diesel fuel. Finally the results has substantiated that biodiesel can be used as an alternative renewable fuel in place of diesel [21]. Swaminathan et al. (2012) investigate the properties of a single cylinder, 4-stroke, water-cooled, DI diesel engine using mixture of fish oil biodiesel and its blends with diesel with diethyl ether with 1-3% with 1% increment as additive as fuel. Their experimental results shown no significant change in BTE, but observed reduced CO₂, CO, and NO_x when engine operated with EGR at full load condition. They recommended 2% additive is the best blend to use in unmodified diesel engine as biodiesel [22]. Sharma et al. (2014) conducted comparative analysis on the engine performance and emission characteristics of a medium capacity diesel engine

using blends of mahua oil methyl ester and fish oil biodiesel and their blends along with the utilization of Urea-SCR as an exhaust treatment technology. Their test results showed the reduction in NO_x emission and higher BTE with fish oil biodiesel blends when compared with mahua oil biodiesel blends. [23].

IV. CONCLUSIONS

The biodiesel which is produced from fish and aqua waste fish oil as feed-stock will be potential alternative bio-fuel source and will therefore play an increasingly remarkable role in solving the energy crisis and providing energy security along with curbing environmental pollution problem. The domestically prepared biodiesel properties must stick with the international biodiesel standard specifications such as the American Standards for Testing Materials (ASTM 6751-3) or the European Union (EN14214) for biodiesel fuel. The physicochemical properties of fish oil biodiesel are within the specified range of ASTM standards. Hence the fish oil biodiesel is compatible and can be used with diluting with diesel fuel as a fuel in any compression ignition engine.

REFERENCES

- [1] Zheng, M., Mulenga, M., Reader, G., Wang, M. et al., "Influence of Biodiesel Fuel on Diesel Engine Performance and Emissions in Low Temperature Combustion," SAE Technical Paper 2006-01-3281, 2006, <https://doi.org/10.4271/2006-01-3281>.
- [2] Quick, G. R., "Developments in use of vegetable oils as fuel for diesel engines", ASAE, no. 80-1525. American Society of Agricultural Engineers, St. Joseph, MI, 1980.
- [3] Tinprabath, P., Hespel, C., Chanchaona, S., and Foucher, F., "Influence of Biodiesel and Diesel Fuel Blends on the Injection Rate and Spray Injection in Non-Vaporizing Conditions," SAE Technical Paper 2013-24-0032, 2013, <https://doi.org/10.4271/2013-24-0032>.
- [4] Sirivella Vijaya Bhaskar, G Satish Babu, "Evaluation of CIDI Engine Performance Using Rice Bran Oil Methyl Ester as Biodiesel", International Journal of Scientific & Engineering Research, vol. 5 (3), 2016, pp. 448-452
- [5] Martin Hájek, František Skopal, Aleš Vávra, Jaroslav Kocík, Transesterification of rapeseed oil by butanol and separation of butyl ester, In Journal of Cleaner Production, Volume 155, Part 1, 2017, Pages 28-33, ISSN 0959-6526, <https://doi.org/10.1016/j.jclepro.2016.07.007>.
- [6] Nagi, J., Ahmed, S.K., Nagi, F., "Palm Biodiesel an Alternative Green Renewable Energy for the Energy Demands of the Future", Inter Conf. on Construction and Building Technology, pp.79-94, 2008.
- [7] Abdelrahman B. Fadhil, Emaad T.B. Al-Tikrity, Mohammed A. Albadree, Biodiesel production from mixed non-edible oils, castor seed oil and waste fish oil, In Fuel, Volume 210, 2017, Pages 721-728, ISSN 0016-2361, <https://doi.org/10.1016/j.fuel.2017.09.009>.
- [8] Pinto, Angelo C., Guarieiro, Lilian L. N., Rezende, Michelle J. C., Ribeiro, Núbia M., Torres, et al., "Biodiesel: an overview", J. Braz. Chem. Soc., vol.16, no.6b , pp. 1313-1330, Dec 2005.
- [9] Liam Brennan, Philip Owende, "Biofuels from microalgae-A review of technologies for production, processing, and extractions of biofuels and co-products", Renewable and Sustainable Energy Reviews, vol.14, no. 2, pp. 557-577, Feb 2010.
- [10] Souza, F. and Watanabe, A., "Biodiesel Impact on Fuel System for Light Commercial and Passenger Vehicles," SAE Technical Paper 2016-36-0275, 2016.
- [11] Pryde, E. H., "Vegetable Oil Fuel Standards, Vegetable Oil Fuels", Proceedings of the International Conference on Plant and Vegetable Oils Fuels, St. Joseph, MI, 1982
- [12] Sirivella Vijaya Bhaskar, Experimental Investigation on Performance of DI Diesel Engine Using Madhuca Indica Biodiesel and its Diesel Blends, International Journal of Scientific Research in Science and Technology, vol. 4(2), pp.565-570
- [13] Kerihuel M. Senthil Kumar J. Bellettre and M. Tazerout, Investigation on a CI Engine Using Animal Fat and its Emulsions with Water and Methanol as fuel SAE. 01-1729, 2005.
- [14] Metin Guru, AtillaKoca, Ozer Can, Can Cinar, FatihSahin, —Biodiesel production from waste chicken fat based sources and evaluation with Mg based additive in a diesel engine, Renewable Energy, vol. 35, 2010, pp. 637-643.
- [15] Preto F, Zhang F, Wang J. A study on using fish oil as an alternative fuel for conventional combustors. Fuel 2008;87:2258–68.
- [16] Sharanappa Godiganur, Ch. Suryanarayana Murthy, and Rana Prathap Reddy, Performance and emission characteristics of a Kirloskar HA394 diesel engine operated on fish oil methyl esters, Renewable Energy, vol. 35(2), 2009, pp. 355-359.
- [17] Cengiz Oner, Sehmus Altun, —Biodiesel production from inedible animal tallow and an experimental investigation of its use as alternative fuel in a DI diesel engine, Applied Energy, vol. 86, 2009, pp. 2114-2120.
- [18] Cheng-Yuan Lin, Rong-Ji Li, Engine performance and emission characteristics of marine fish-oil biodiesel produced from the discarded parts of marine fish. Fuel Process Technology, vol. 90, 2009, pp.130-136.
- [19] Lin C-Y, Li R-J, Engine performance and emission characteristics of marine fish-oil biodiesel produced from the discarded parts of marine fish. Fuel Process Technology, vol. 90, 2009, pp.883–888.
- [20] Sakthivel, G. and Nagarajan, G., Experimental Studies on the Performance and Emission Characteristics of a Diesel Engine Fuelled with Ethyl Ester of Waste Fish Oil and its Diesel Blends, SAE Technical Paper 2011-01-2402, 2011.
- [21] Rasim Behçet (2011) Performance and emission study of waste anchovy fish biodiesel in a diesel engine. Fuel Processing, vol. 92(6), 2011, pp. 1187-1194.
- [22] Swaminathan, C. and Sarangan, J. Performance and exhaust emission characteristics of a CI engine fuelled with biodiesel (fish oil) with DEE as additive, Biomass and bioenergy, vol. 39, 2012, pp. 168-174.
- [23] Sharma, S., Gupta, S., Kumar, N., and Kumar, S., Comparative Study on Performance and Emission Characteristics of Fish Oil Biodiesel and Mahua Oil Biodiesel Blend with Diesel and Diesel Fuel in a Medium Capacity Compression Ignition Employing Urea-SCR with Cu-ZSM5, SAE Technical Paper 2014-01-1499, 2014, DOI:10.4271/2014-01-1499.



10.22214/IJRASET



45.98



IMPACT FACTOR:
7.129



IMPACT FACTOR:
7.429



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24*7 Support on Whatsapp)