iJRASET
International Journal For Research in Applied Science and Engineering Technology



INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Volume: 7 **Issue:** IV **Month of publication:** April 2019

DOI: https://doi.org/10.22214/ijraset.2019.4572

www.ijraset.com

Call: 08813907089 | E-mail ID: ijraset@gmail.com

International Journal for Research in Applied Science & Engineering Technology (IJRASET)
ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor: 6.887
Volume 7 Issue IV, Apr 2019- Available at www.ijraset.com

Fabric Defect Detection using Image Processing CNN

Mrs A. Preethi[1], Dr. P. Iyyanar [2]
[1]*Mrs A.Preethi, PG Scholar, Information Technology, Sona College of Technology, Salem, India*
[2] *Dr.P. Iyyanar, Assistant Professor, information Technology, Sona College of Technology, Salem, India*

***Abstract*:** To maintain the good quality of fabric, inspection is important. In Fabric industry the inspection is done manually which are time consuming, stressful and involves more manpower. This traditional inspection for fabric defects is insufficient and costly. To improve the performance, automated fabric defect detection plays a vital role. This methodology results in production of high quality products with less time. The image processing techniques are applied for the input defective fabric, convert into grey scale images, noise filtering ,binary image conversion, thresholding and the calculated output is received. The automated system based on deep learning algorithms is used to detect the defect. The proposed system will efficiently detect the fabric defects with improved accuracy in less time.

Keywords: Image Processing, Neural Network, Fabric, Defect detection, Fabric inspection

I. INTRODUCTION

In textile industry Fabric defect detection is an important part of quality control. The study reveals around 85% of the defects are due to the fabric. The textile industries are aiming to produce good quality fabrics with high production rate. The fabric with defects or faults yields only 45% to 65% of the profit from the second's sale. This faulty fabric is the major loss in the textile industry. The manual inspection which involves the skilled labour or technician in the defect detection is not only costly but may not be as accurate as the automated fabric defect detection. The automated defect detection results in less labour cost and more accurate.


Image processing plays an important role in detection of fabric fault. The images of the defect or faults are converted to grey scale image in pre-processing. The next step involves feature extraction such as various features like shape, size etc. The patterns of defect and non-defects are classified. Thus the output is obtained.

II. FABRIC DEFECT TYPES

There are different types of defects classified in textile industry. The defects can occur in weaving, knitting and dying. Listed are some of the defects.

A. Machine faults
B. Hole
C. Strain
D. Yarn problems
E. Scratch
F. Poor finishing

III.METHODOLOGY

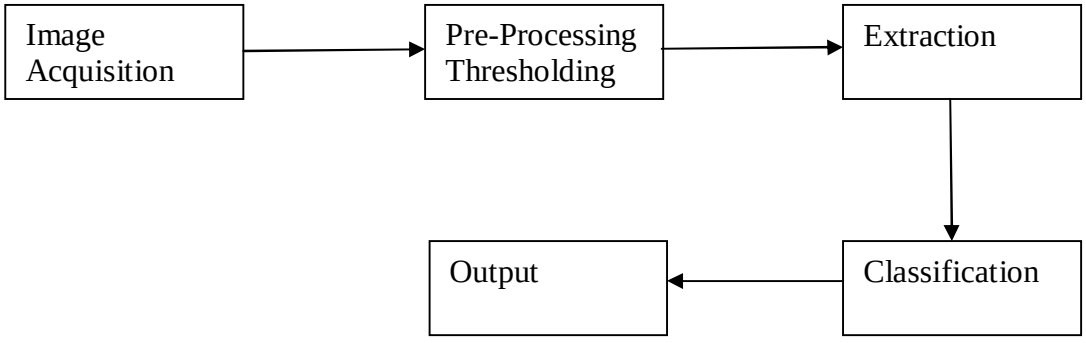

©IJRASET: All Rights are Reserved

A. Image Acquisition

The range of different faulty images are stored as set of files and given as input. This also includes non-faulty images or verification.

B. Pre-Processing

In thresholding a grey level image is converted into input image. Pre-processing also includes filtering of noises and other distortion though the images are captured in high resolution.

C. Extraction

The various features from the faulty fabric image such as size, shape and other required features are extracted as the accuracy of defect depends on this step.

D. Classification

The classifier compares the features obtained from the extraction and classifies the object within the image correctly [1].

IV. CONCLUSION

The proposed methodology explains about implementing the defect detection using CNN. Neural network (NN) models [51,114] can perform many tasks [115] such as feature extraction, segmentation and optimization.The tensorflow and keras in python plays a vital role in the proposed implementation.

TensorFlow [3] is an interface for expressing machine learning algorithms and an implementation for executing such algorithms. It operates at large scale and in heterogeneous environments. TensorFlow uses dataflow graphs to represent different states. It maps the nodes across different computational devices such as multicore CPU, GPU and TPU (tensor Processing unit).

Apart from other methods partially using NN in [14, 19,39,48,71,74,82,95], NN-oriented fabric inspection methods are depicted in Table 5. Stojanovic et al. [116] suggested a three-layer back-propagation artificial neural network for low cost fabric defect detection with off-the-shelf components. It achieved a detection accuracy of 86.2%.

REFERENCES

[1] Prof.M.S.Biradar, Prof.Sharda P.Jadhav “Fabric defect detection using neural network technique” IOSR Journal of Electronics and Communication Engineering,vol.4 pp 70-76 Mar-Apr.2014

[2] R.C.Gonzalez, R.E.Woods, S.L.Eddins, “Digital Image Processing using Matlab”, 2005. pp. 76-104, pp.142-166

[3] Mahure, Jagruti, and Y. C. Kulkarni. "Fabric faults processing: perfections and imperfections." International Journal of Computer Networking, Wireless and Mobile Communications (IJCNWMC) 1.4 (2014): 101-106.

[4] Dharmistha D. Vishwakarma, “Analysis of Fabric Properties Using Digital Fabric Simulator”, International Journal of Engineering Research and Development, e-ISSN: 2278-067X, Volume4, Issue 2(October2012), PP. 44-47.


[5] Mart´ın Abadi, Ashish Agarwal, Paul Barham, Eugene Brevdo, Zhifeng Chen, Craig Citro, Greg S. Corrado, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Ian Goodfellow, Andrew Harp, Geoffrey Irving, Michael Isard, Yangqing Jia, Rafal Jozefowicz, Lukasz Kaiser, Manjunath Kudlur, Josh Levenberg, Dan Mane, Rajat Monga, Sherry Moore, Derek Murray, Chris ´ Olah, Mike Schuster, Jonathon Shlens, Benoit Steiner, Ilya Sutskever, Kunal Talwar, Paul Tucker, Vincent Vanhoucke, Vijay Vasudevan, Fernanda Viegas, Oriol ´ Vinyals, Pete Warden, Martin Wattenberg, Martin Wicke, Yuan Yu, and Xiaoqiang Zheng. TensorFlow: Large-scale machine learning on heterogeneous systems, 2015. Software available from tensorflow.org.

[6] Priya S, Kumar TA, Paul V. A novel approach to fabric defect detection using digital image processing, Signal Processing, Communication, Computing and Networking Technologies (ICSCCN), 2011 International Conference on IEEE, 2011, 228-232.

[7] Chen T, Wu, HR. Space variant median filters for the restoration of the impulse noise corrupted images, IEEE Transaction Circuits syst.II, Analog Digital Signal Process 2001; 48(8):784-789

[8] B.Karunamoorthy,Dr.D.Somasundareswari,S.P.Sethu “AUTOMATED PATTERNED FABRIC FAULT DETECTION USING IMAGE PROCESSING TECHNIQUE INMATLAB”.InternationalJournal of Advanced Research in Computer Engineering & Technology (IJARCET) .Volume 4. Issue 1, January 2015

©IJRASET: All Rights are Reserved

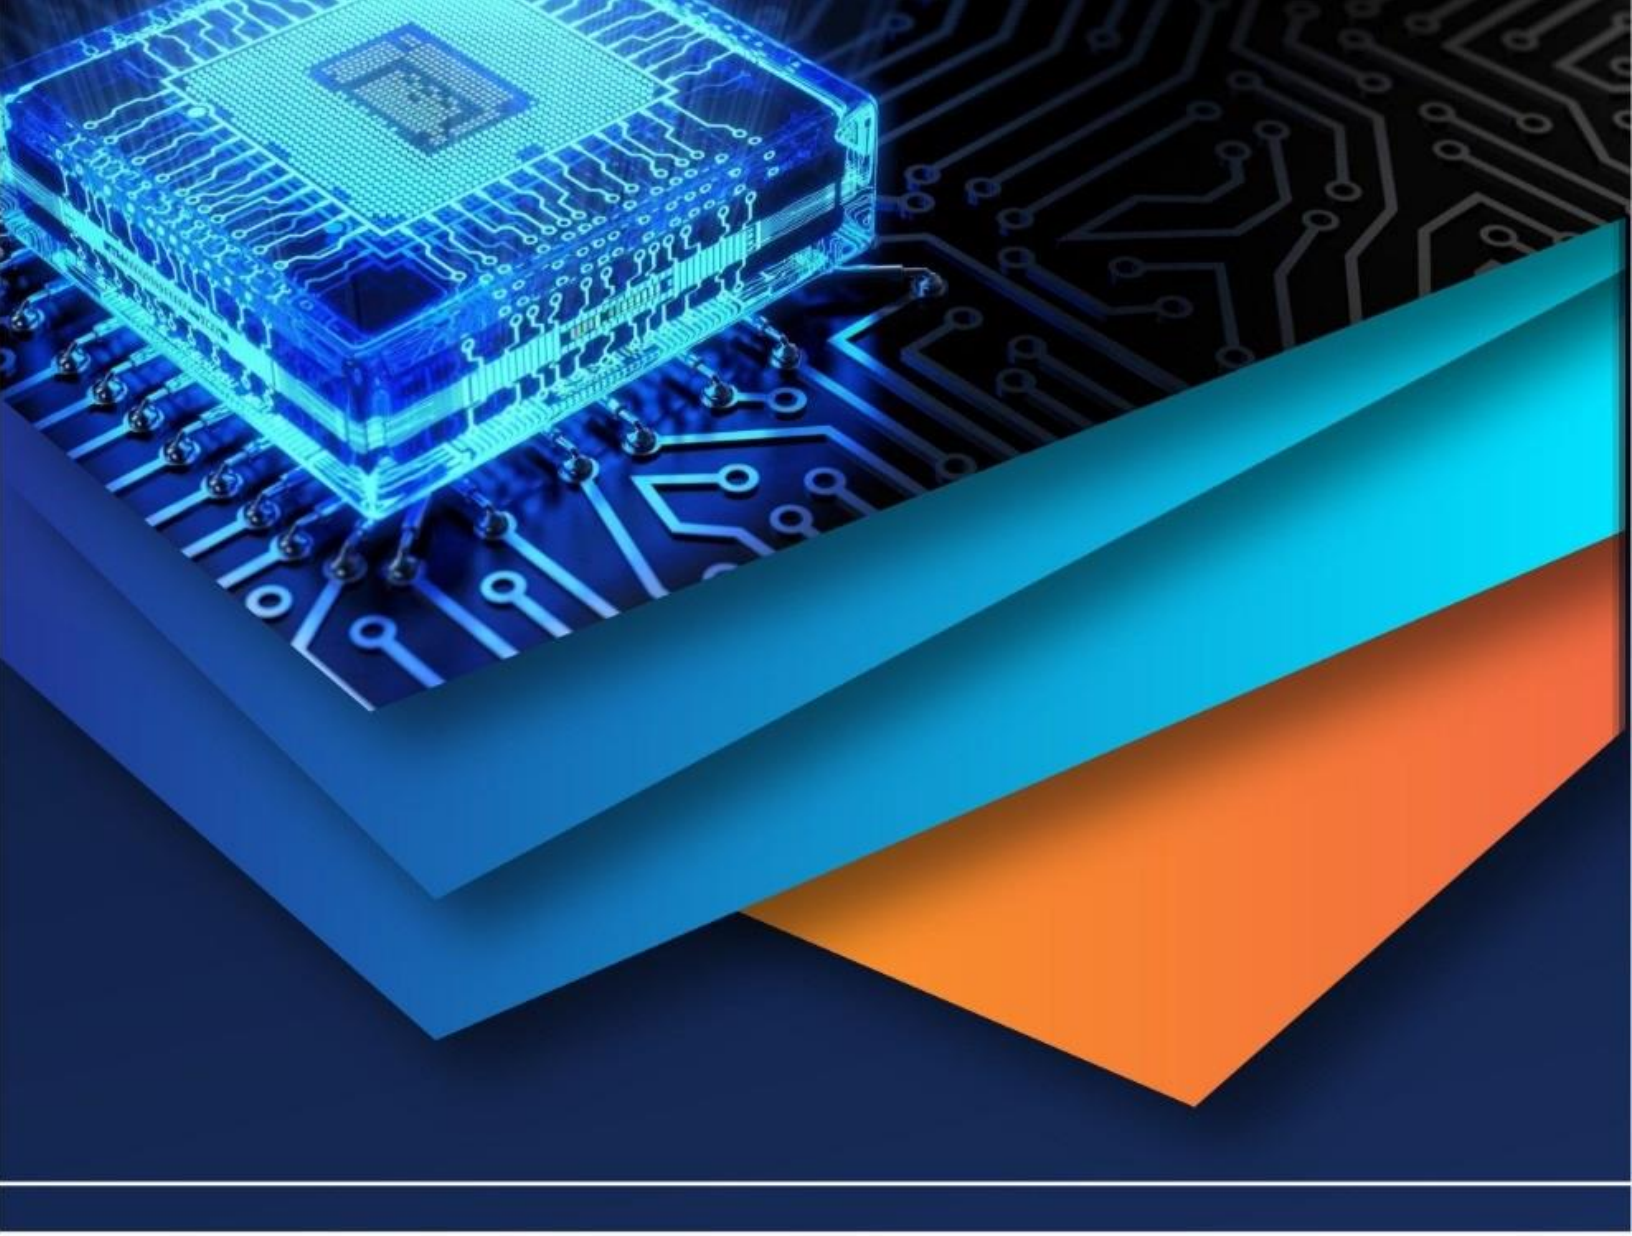

10.22214/IJRASET

45.98

IMPACT FACTOR: 7.129

IMPACT FACTOR: 7.429

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)