



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 8      Issue: V      Month of publication: May 2020**

**DOI: <http://doi.org/10.22214/ijraset.2020.5432>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# Effect of Infill Wall on Reinforced Concrete Frame using ETABS

Vaibhav Dehankar<sup>1</sup>, Dr. Swati Ambadekar<sup>2</sup>

<sup>1</sup>P.G. Student, <sup>2</sup>Assistant Professor, Department of Civil Engineering, G. H. Raisoni University, Amravati, Maharashtra, India

**Abstract:** In the building having open ground storey has a problem with sudden changes in the stiffness of the building height and that usually consider that storey enough flexible as compared to the other storey. But in such buildings it was found that the beams, columns and slab have more stress and bending moment values as compared to the other buildings. Therefore the infill wall should be constructed so that the building shall sustain the lateral loadings due to the earthquake. Therefore the analysis is to be carried out in the software to get the proper results. The present study deals with the modeling of the reinforced concrete structure with infill walls in the software. The results shall be studied for the fully infill wall, partially infill walls and without infill wall.

**Keywords:** Infill wall, ETABS, storey drift, storey shear & time period

## I. INTRODUCTION

Reinforced concrete (RC) structures with infusion walls are the most common types of buildings in areas prone to the earthquake in Turkey. Filling the wall, as a rule, neglected in the structural process of design due to the complications encountered in modeling them and their interaction with the surrounding frame. However, the presence of infusion walls has been proven to affect the rigidity, strength and seismic behavior of structures significantly. Depending on demand coefficients, wall filling can be either useful or detrimental for seismic requirements. Infusion walls usually increase the global rigidity and strength of constructions. This situation can be advantageous for non-ductile buildings to a certain limit.

On the other hand, a fragile nature and a rich variety of modes of failure from the infusion walls can cause unforeseen and irreversible losses. In particular, soft-story mechanisms can occur due to the concentration of drift in the lower histories of multi-storey structures. To mitigate the impact of infoutwalls, organized rigidity for the height of the structure can be used with infusion walls with different rigidity and strength properties.

## II. LITERATURE REVIEW

Time periods decreases with the increase of amount of infill in the buildings (highest for without infills and lowest for the fully infilled case). This results in the attraction of more earthquake force for the lower time periods. Story drift is found to be lowest for fully infilled and highest for without infills but drift of first story is highest for the building with infills above ground floor (i.e. open ground story) (Prakash Paudel 2017).

Deviations in the case of bare frames are very large, compared with solid brick conditions. As the number of stores increases, there are additional side load responsibilities added to increase the level of the material. As a result, maximizes the maximum upper deflection of the building. The maximum deviation of each of the stores is greatly reduced by using infusion wall panels (laziness m Thomas et al 2015).

## III. METHODOLOGY

The models are modeled in STAAD-PRO as follows:

- 1) *Model I:* Building without Infill Walls (Symmetrical Building)
- 2) *Model II:* Building with modelling of Infill Walls as a Single strut with IS method (Symmetrical Building) -Size of Strut = 230X400
- 3) *Model III:* Building with modelling of Infill Walls as a Single strut with Holmes method (Symmetrical Building) -Size of Strut = 230X1345
- 4) *Model IV:* Building with modelling of Infill Walls as a Single strut with Paulay and Prestley method (Symmetrical Building) - Size of Strut = 230X1009
- 5) *Model V:* Building with modelling of Infill Walls as a Single strut with Hendry method (Symmetrical Building) -Size of Strut = 230X1240

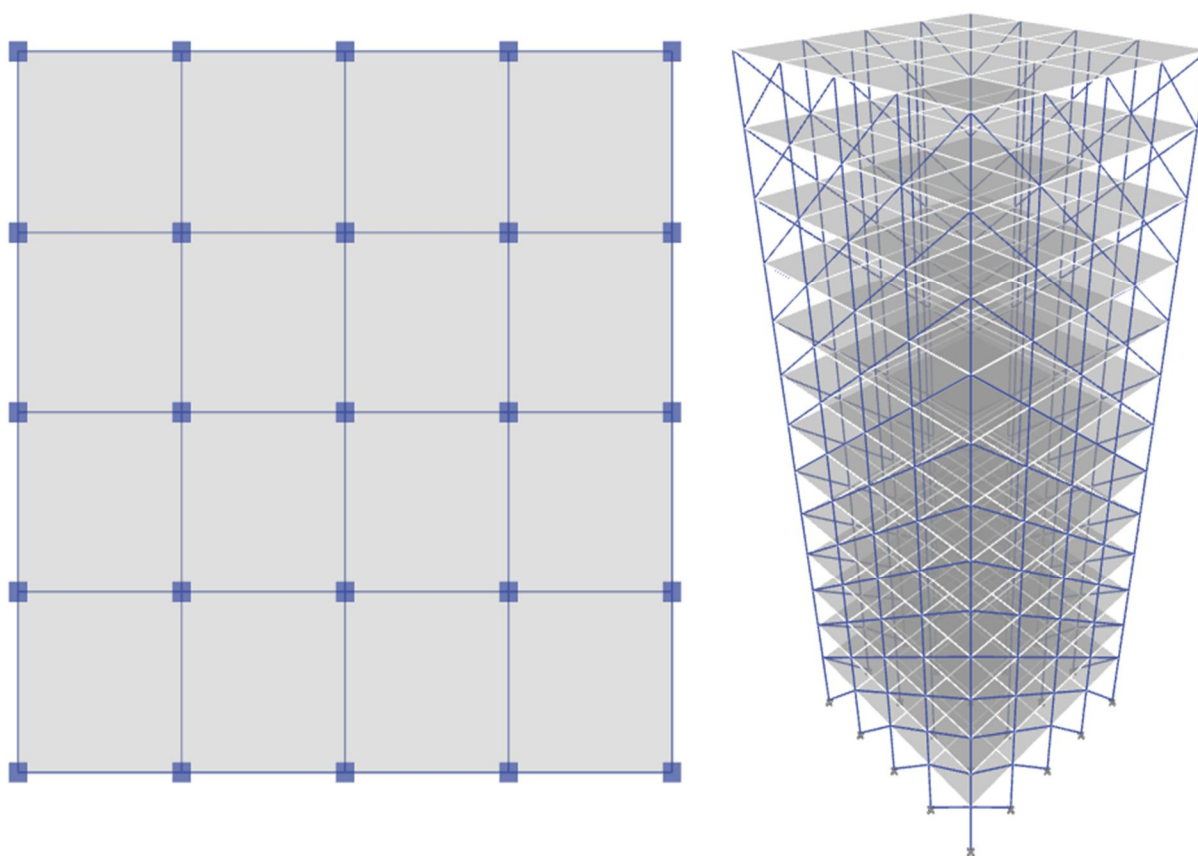


Fig.1: Plan & Elevation of the building

#### IV. RESULTS

The results are obtained in terms of the lateral displacement, storey drift, storey shear, storey stiffness and time period as follows.



Fig.2: Lateral displacement for model-I

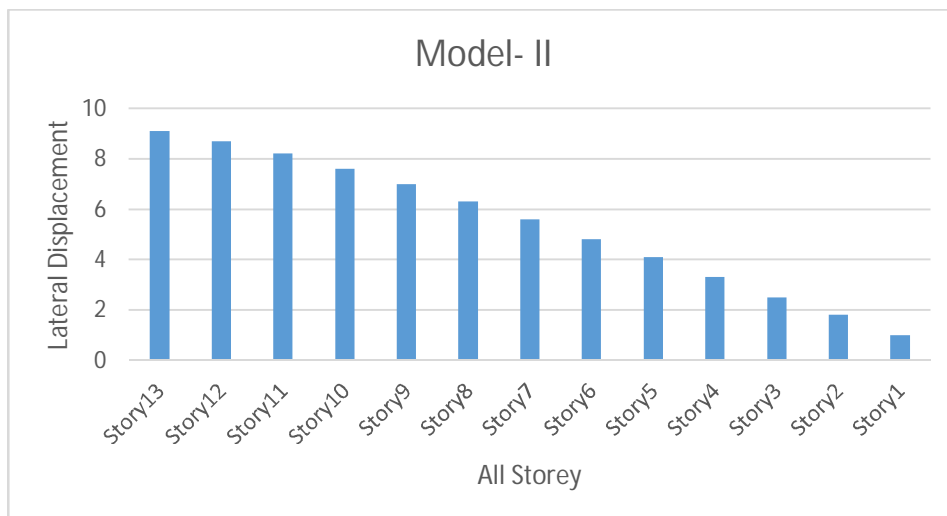


Fig.3: Lateral displacement for model-II

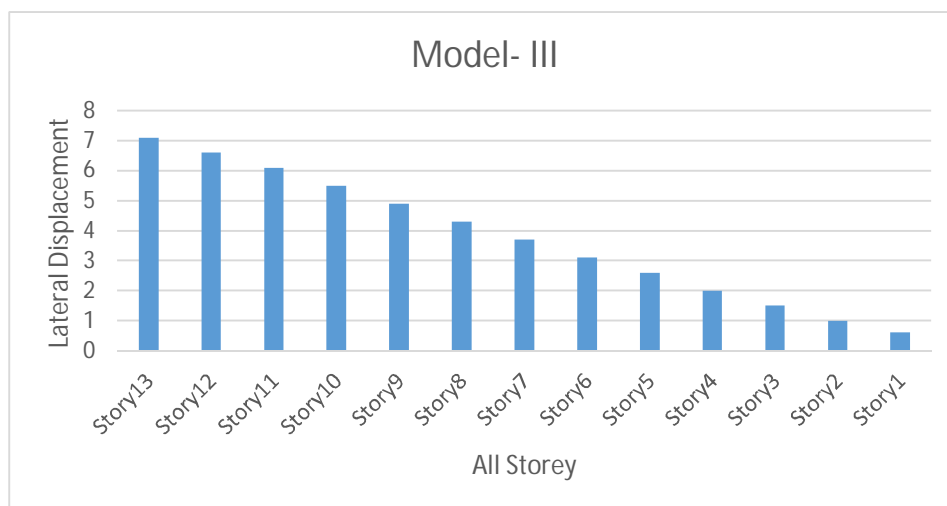


Fig.4: Lateral displacement for model-III

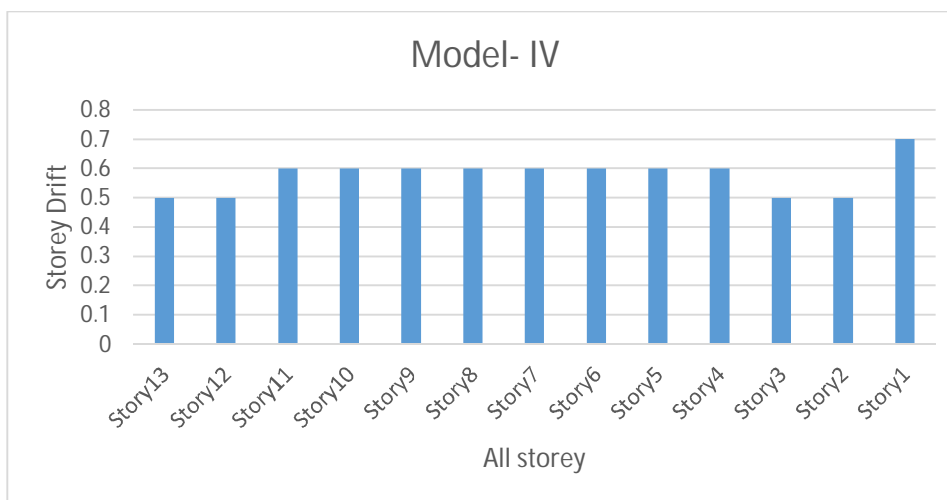


Fig.5: Storey Drift for model-IV

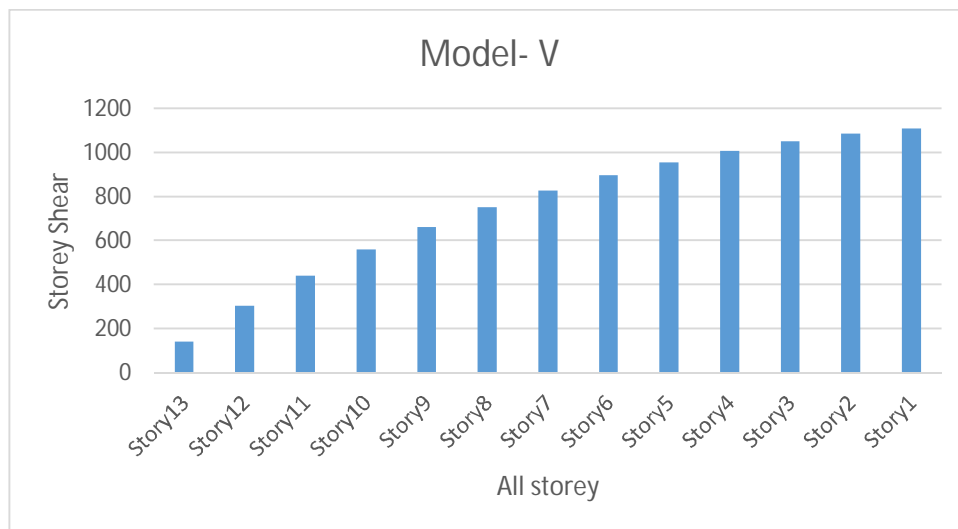


Fig.6: Storey Shear for model-V

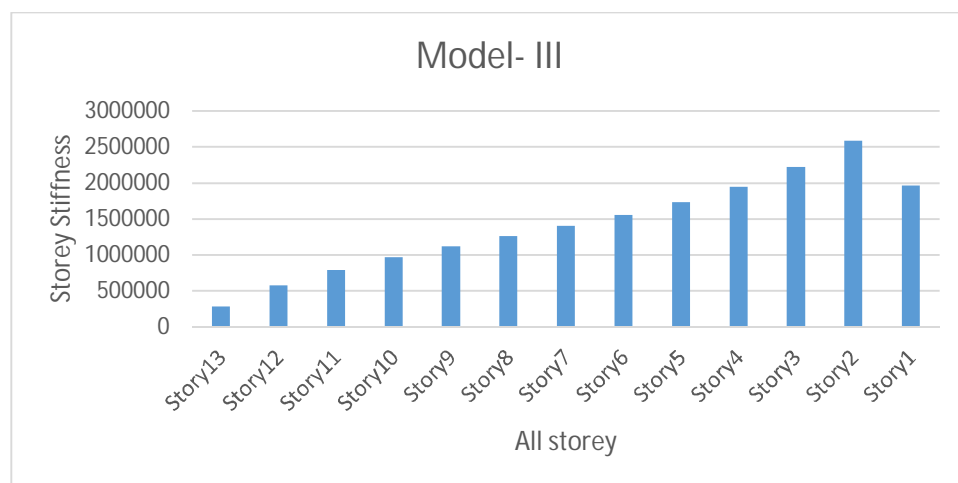


Fig.7: Storey stiffness for model-III

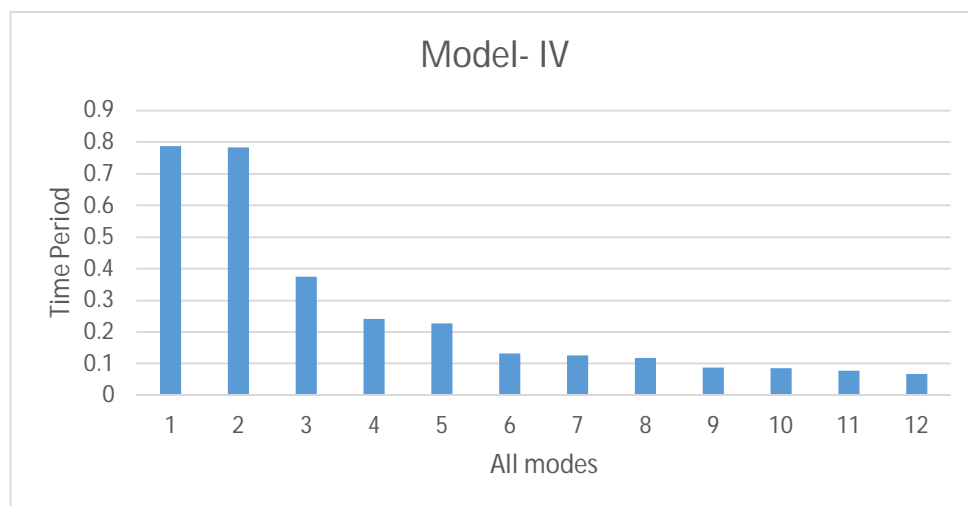


Fig.8: Time Period for model-IV



## V. CONCLUSION

From the above study following conclusion can be drawn:

- A. Lateral displacement for storey 13 is maximum in case of all models
- B. Storey drift is maximum in storey 1 for all models
- C. Storey shear is also maximum in case of storey 1 as compared to other models
- D. Storey stiffness is maximum in storey 2
- E. Time period is minimum for mode 12

## REFERENCES

- [1] Castro, P.T Laursen, D.C Jansen, "Performance of interlocking compressed earth block infill in confined masonry construction" Journal of Earthquake Engineering, July 2014, Pgs: 1-13.
- [2] S. Pujol and D. Fick, "The test of a full-scale three-story RC structure with masonry infill walls", Science Direct, Volume 32, Issue 10, October 2010, Pages 3112–3121.
- [3] A. Madan, and M. Reinhorn, " Modeling of masonry infill panels for structural analysis" Journal of Structural Engineering, 2011, pages: 1295-1302.
- [4] Cemalettin Dönmez and M. Alper Çankaya "Effect of Infill Walls on the Drift Behavior of Reinforced Concrete Frames Subjected to Lateral-Load Reversals", Journal of Earthquake Engineering, Volume 17, Issue 5, 2013.
- [5] Kashif Mahmud, Rashadul Islam and Al-Amin "Study of the Reinforced Concrete Frame with Brick Masonry Infill due to lateral loads", International Journal of Civil and Environmental Engineering, Volume 10, Issue 4, August 2010, Pages 35-40.
- [6] Polyakov S.V, "Masonry in Framed Buildings", Moscow, 1956.
- [7] Xia Liu, Liang, "Research on the Mechanical Properties of Frame Structure Staircase Setting Isolation Bearing", MATEC web Conferences, 22, 2015.
- [8] Ajagbe, Rufai, Labiran, "Finite Element Analysis of a Free standing staircase", Nigerian Journal of Technology (NIJOTECH), Volume 33, Issue 4, 2014.
- [9] Cao, Bian, Chun-Yi XU, "Analysis of the Interaction between Stair and Frame under Horizontal Earthquake Action Based on ETABS", International Conference on Mechanics and Civil Engineering, ICMCE, 2014.
- [10] Baqi, Mohammad, "Effect of U-Turn in Reinforced Concrete Dog-Legged Stair Slabs", International Journal of Civil and Environmental Engineering, Vol. 7, No. 6, 2013.
- [11] Wang, Ma, "Frame Structure the Design of Stair Analysis", Advanced Materials Research, Vol. 663, pp. 116-119, 2013.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)